


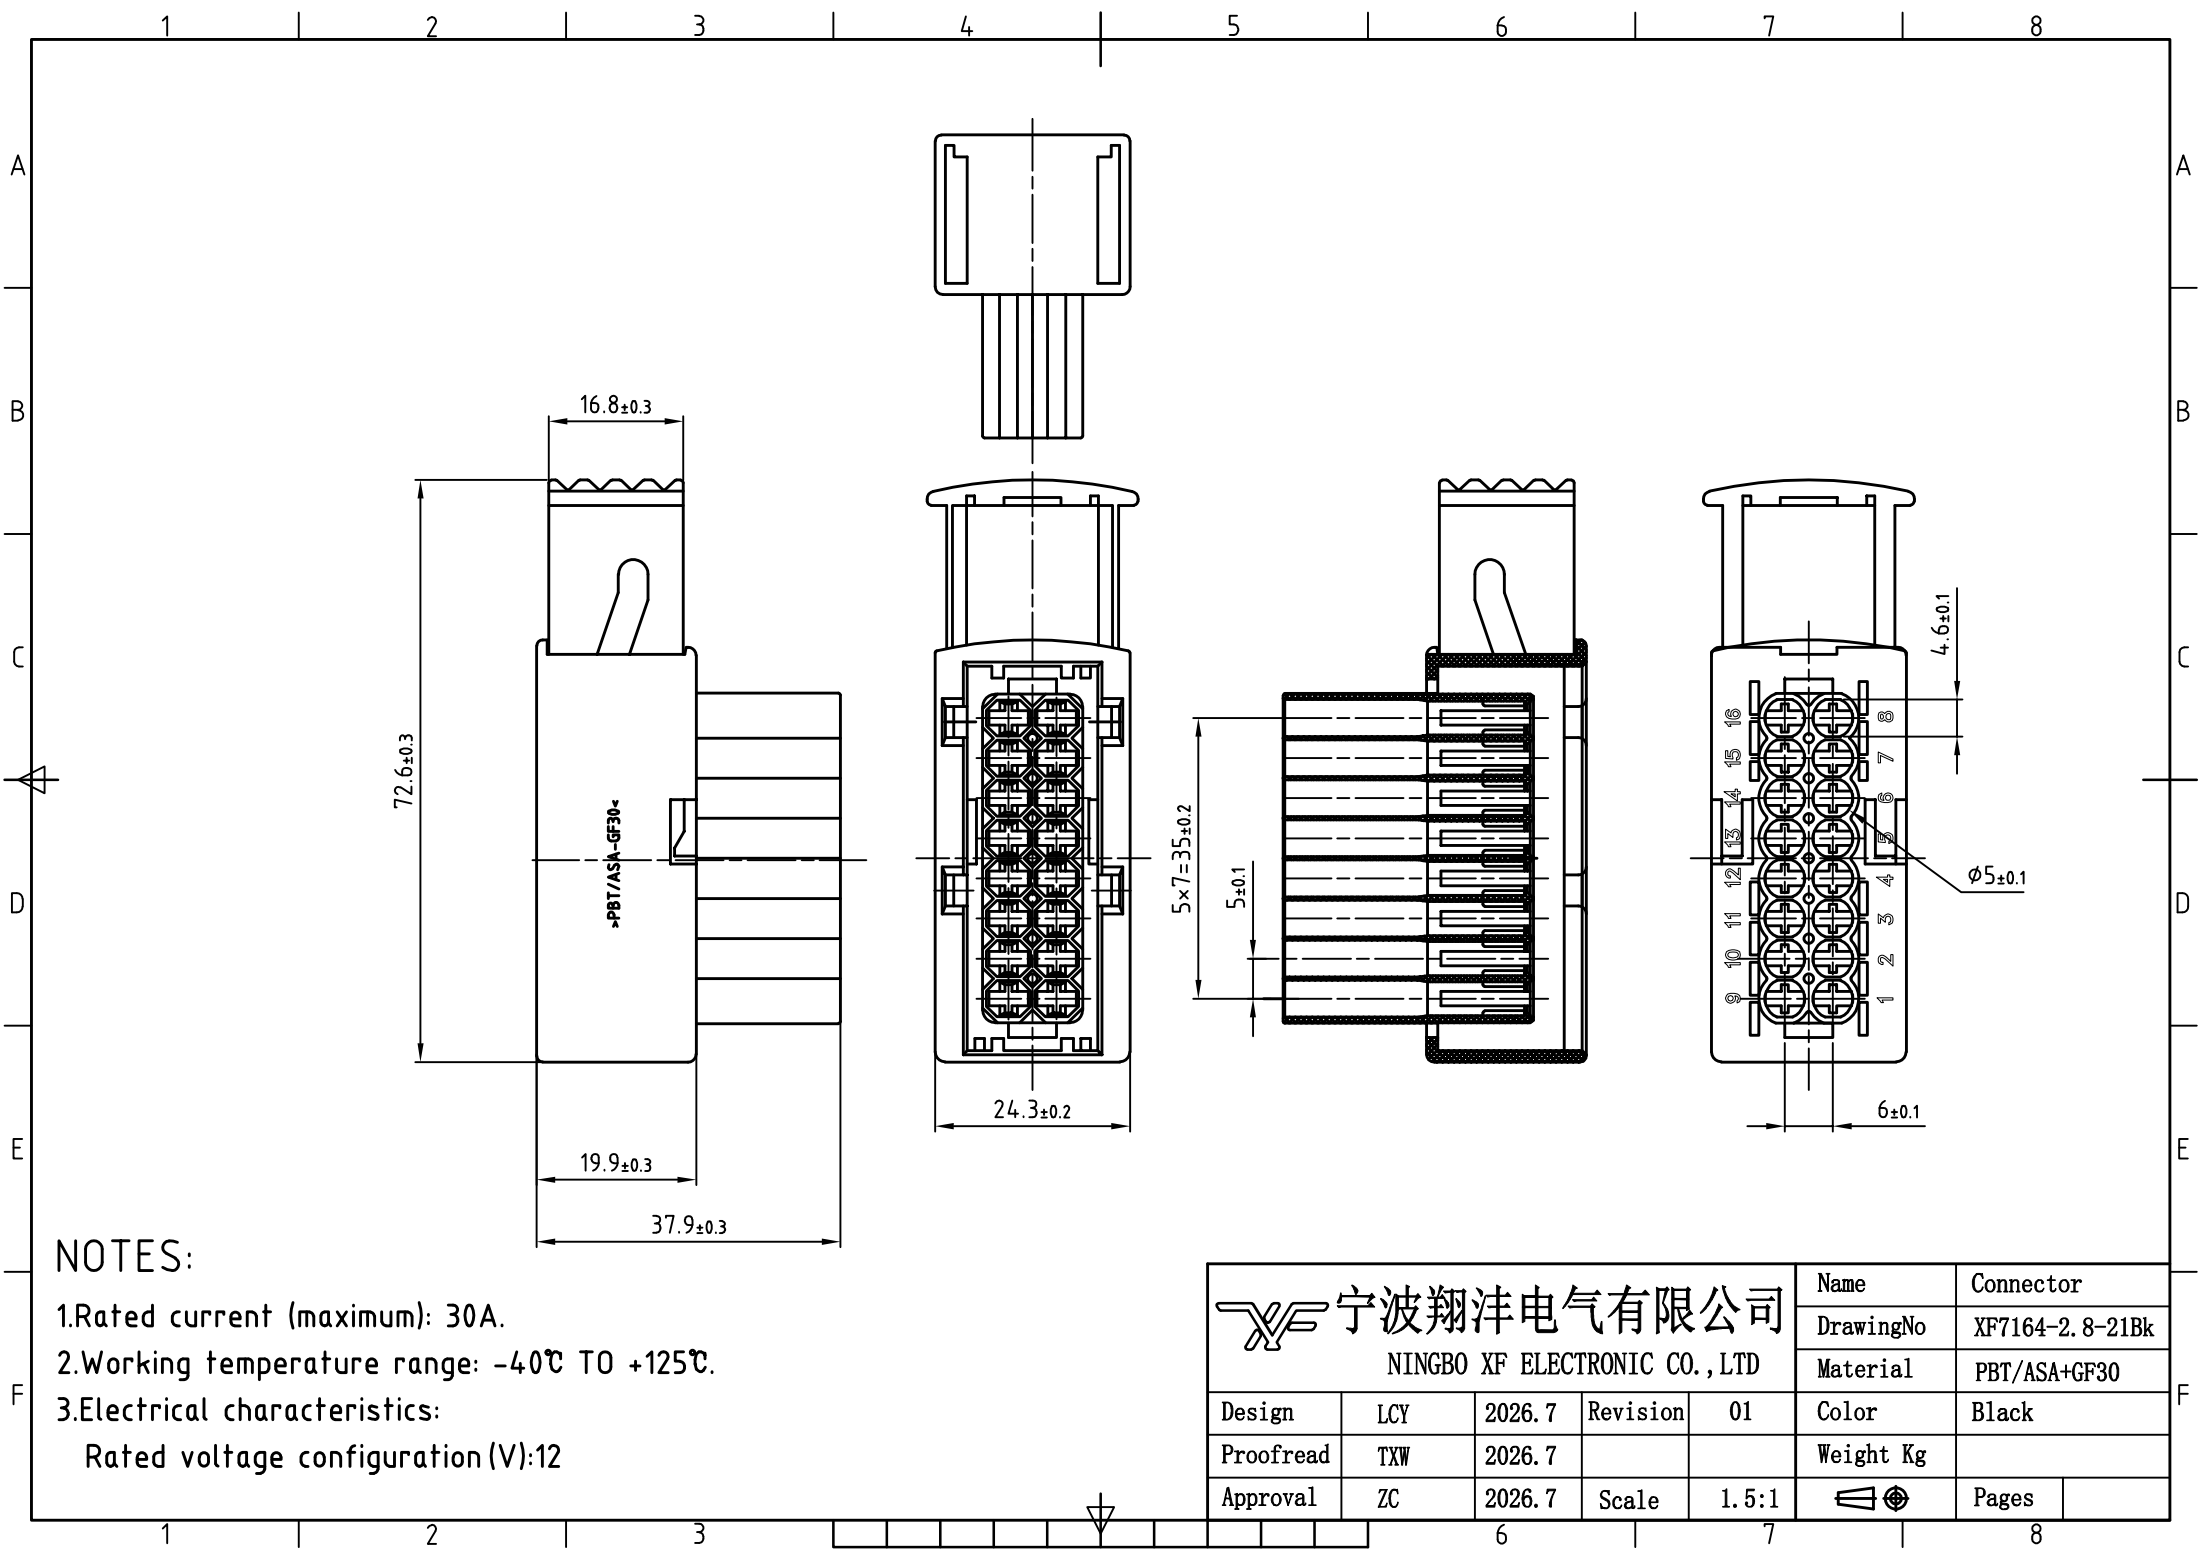

NOTES:

- 1.Rated current (maximum): 30A.
- 2.Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
- 3.Electrical characteristics:
Rated voltage configuration (V):12

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XF7164-2.8-21Bk	
					Material	PBT/ASA+GF30	
Design	LCY	2026.7	Revision	01	Color	Black	
Proofread	TXW	2026.7			Weight Kg		
Approval	ZC	2026.7	Scale	1.5:1		Pages	