

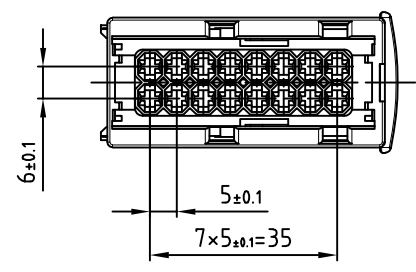

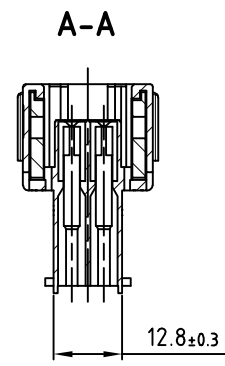
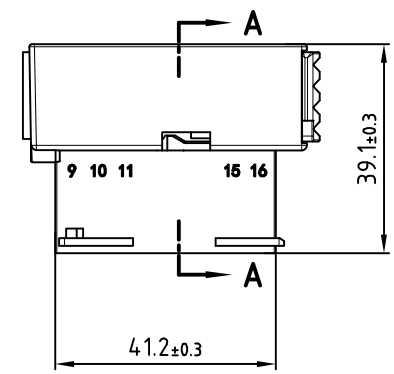



A
B
C
D
E
F



注:
1、工作温度:-40℃~125℃
2、UL阻燃性等级:UL-94 V0

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名 称	连接件		
					型 号	XF7165-2.8-21Bk		
					材 料	PBT+GF30		
设 计	赖春裕	2026.7	标准化		颜 色	黑色		
校 对	童旭文	2026.7			重 量			
审 核	张超	2026.7	比 例	1:1	阶段标记		版 次	01
未注公差: XX.X ±0.2;					A		共 1 页 第 1 页	

A
B
C
D
E
F