


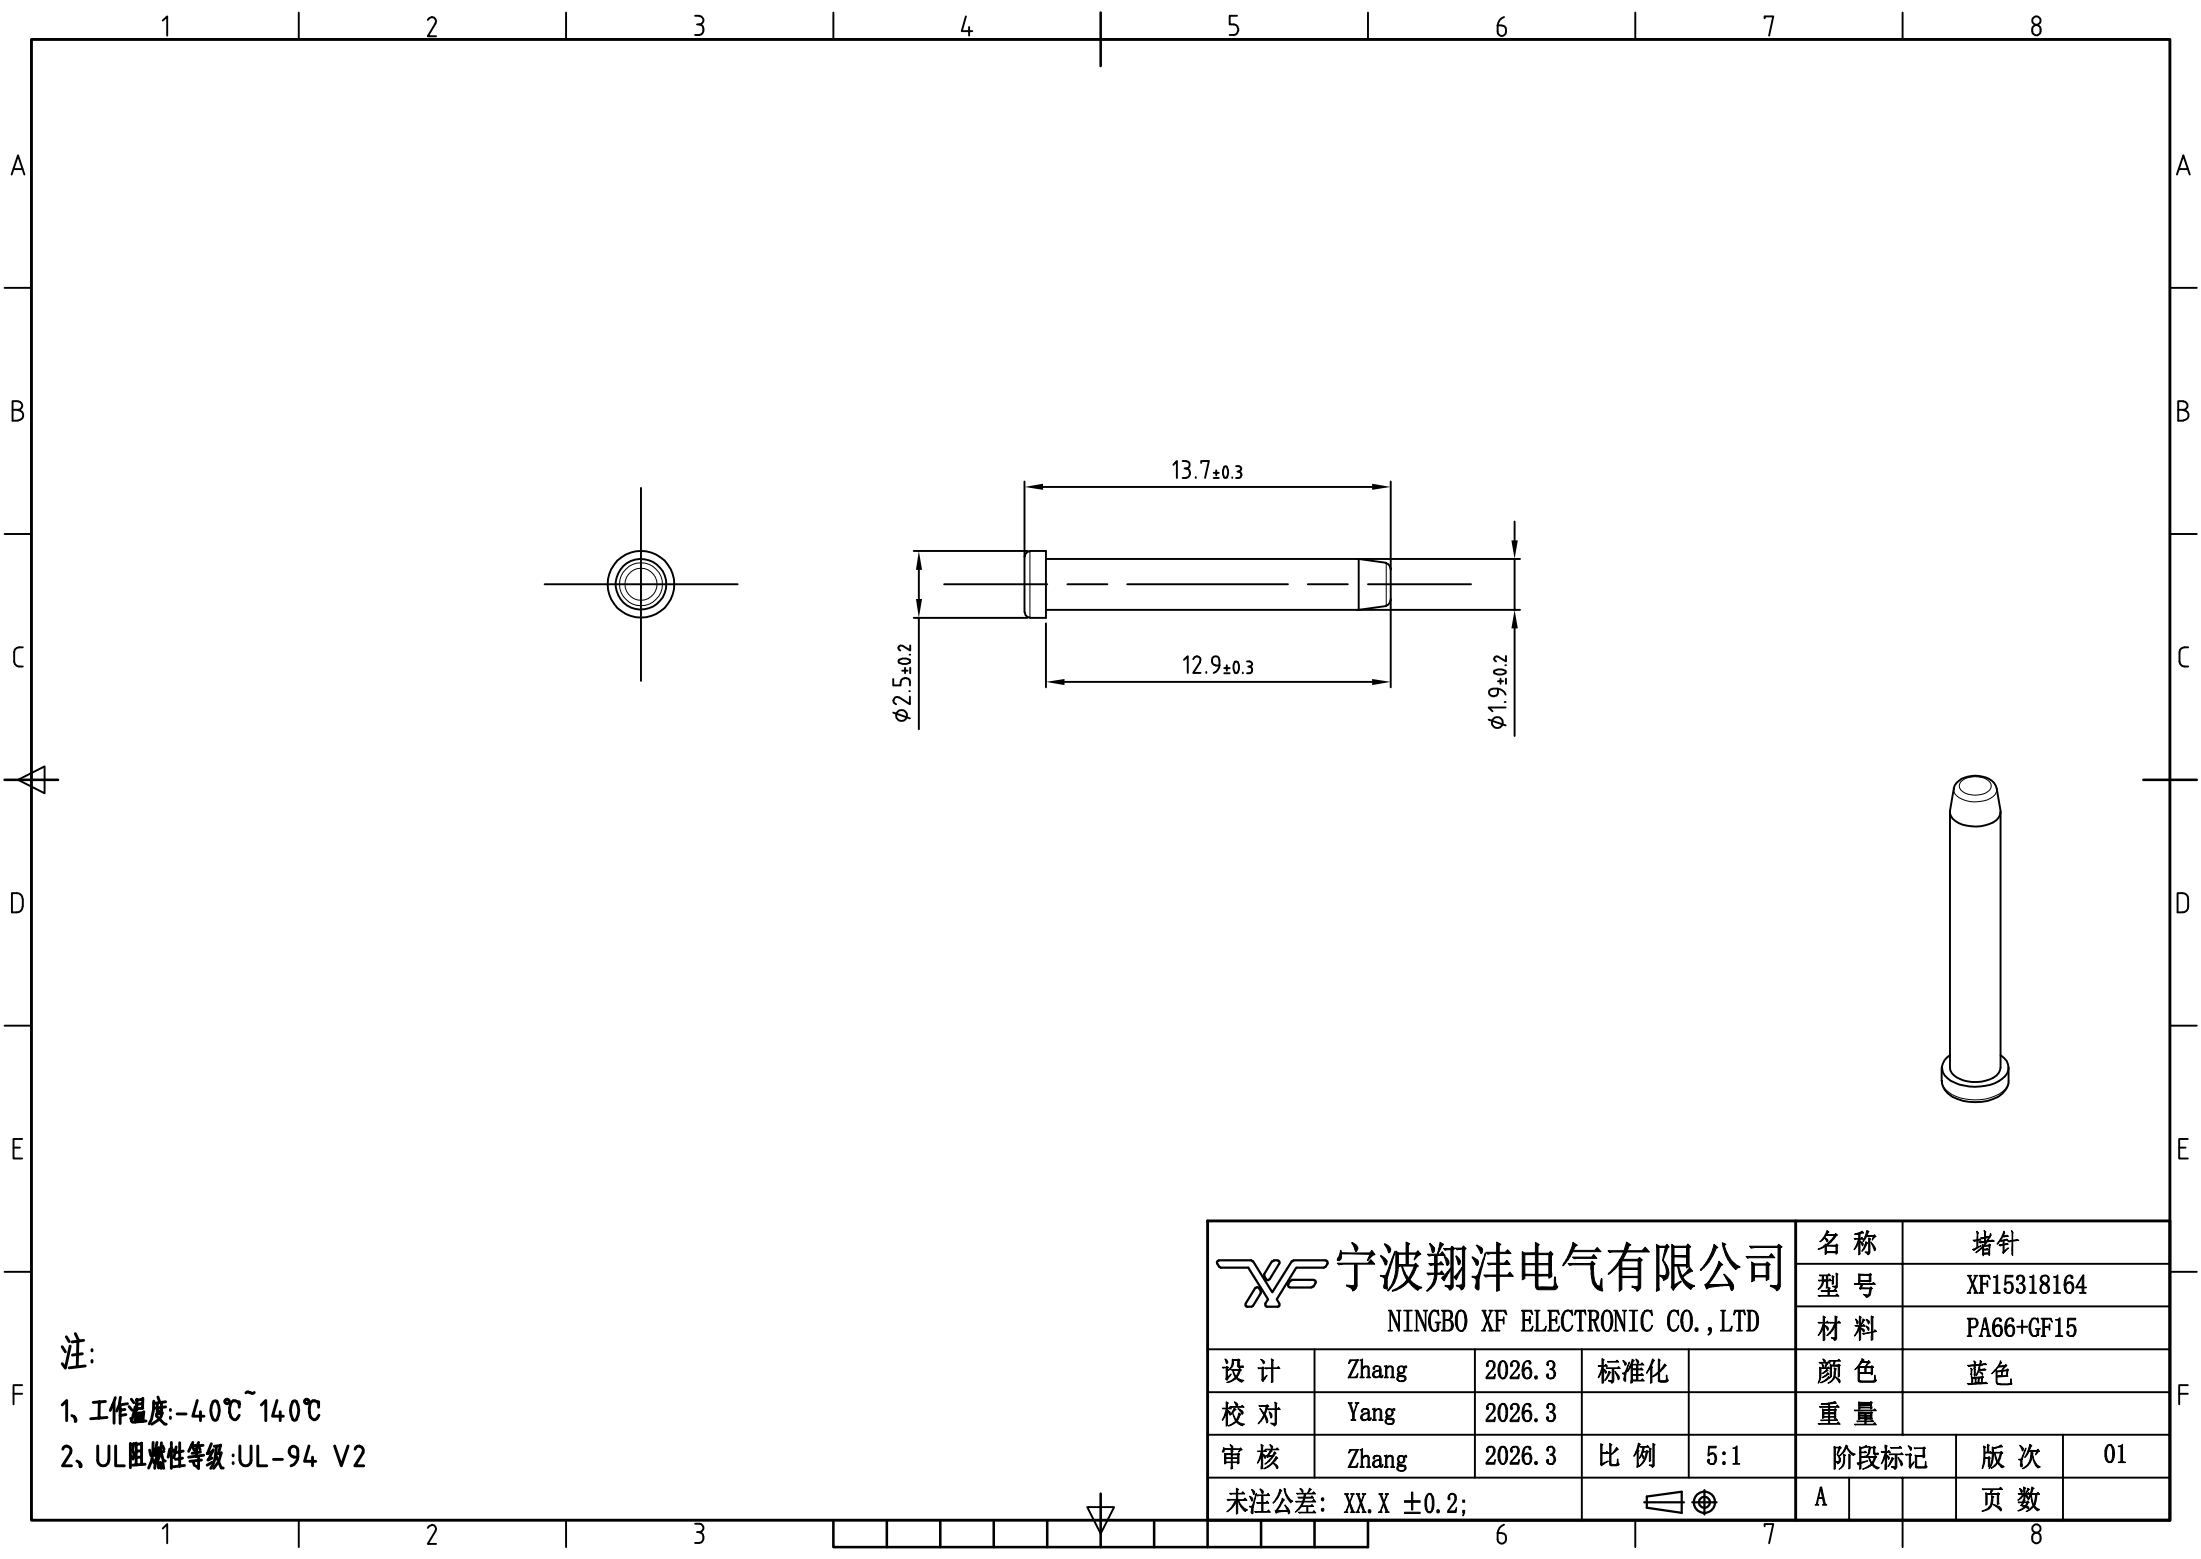

注:

1、工作温度:-40℃~140℃

2、UL阻燃性等级:UL-94 V2