
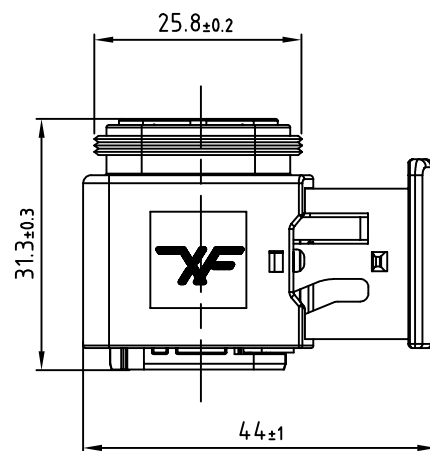
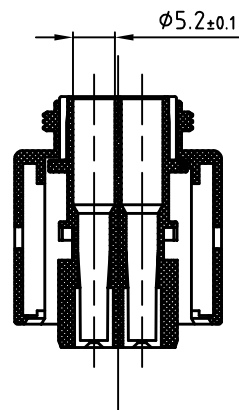
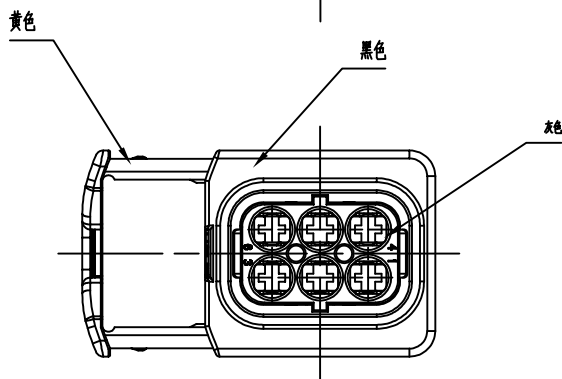
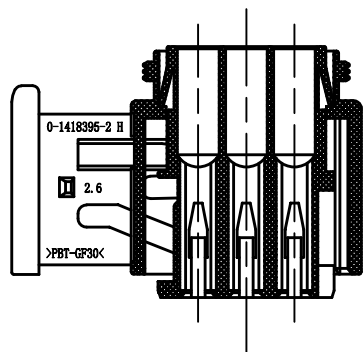


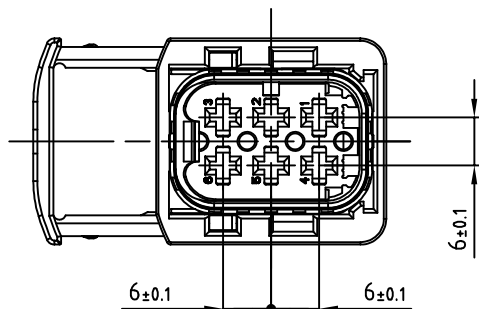

注:

- 1、端子额定电流(最大值)(A):40A
- 2、工作温度:-40℃~125℃
- 3、防水:IP67
- 4、UL阻燃性等级:UL-94 HB
- 5、电气特征:工作电压(VDC):60

标称电压架构(V):12|24|48

 宁波翔沔电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名 称	连接件		
					型 号	XF7064-2.8-21Gr		
					材 料	PBT+GF30		
设 计	杨建刚	2026.7	标准化		颜 色	黑色/灰色		
校 对	童旭文	2026.7			重 量			
审 核	张超	2026.7	比 例	1.5:1	阶段标记		版 次	01
未注公差: XX.X ±0.2;					A			共 1 页 第 1 页