
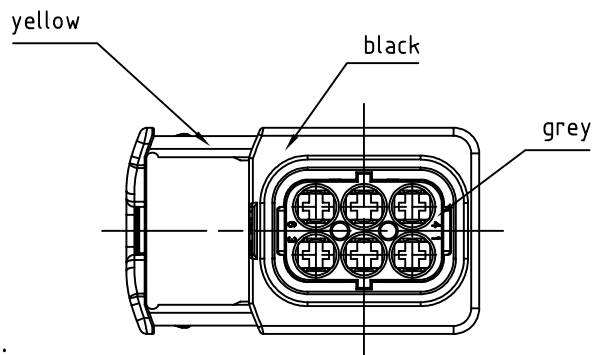
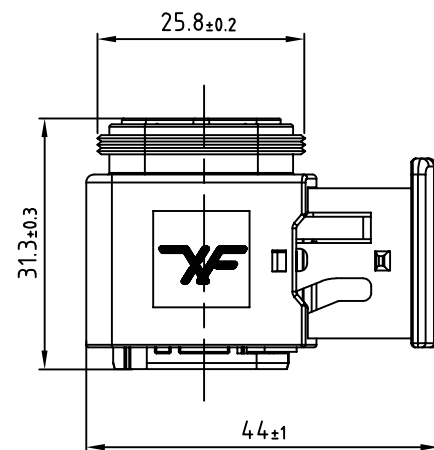
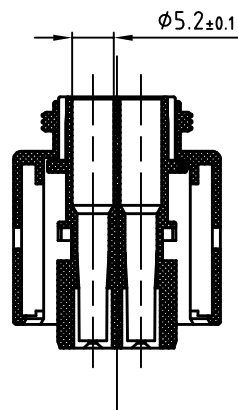
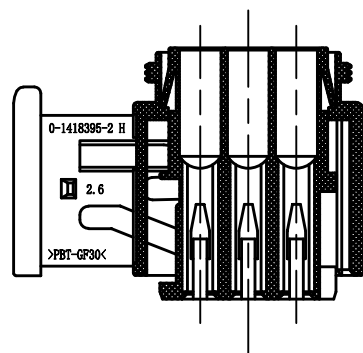


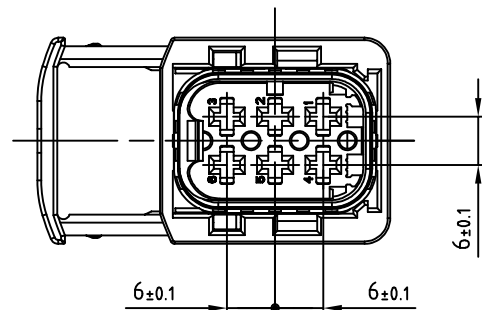

NOTES:

- 1.Rated current (maximum): 40A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.Moisture resistance:IP67.
- 4.UL Flame resistance rating:UL-94 HB
- 5.Electrical characteristics:
Working voltage (VDC):60
Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector
					DrawingNo	XF7064-2.8-21Gr
					Material	PBT+GF30
Design	YJG	2026.7	Revision	01	Color	Black/Grey
Proofread	TXW	2026.7			Weight Kg	
Approval	ZC	2026.7	Scale	1.5:1		Sheet 1 of 1