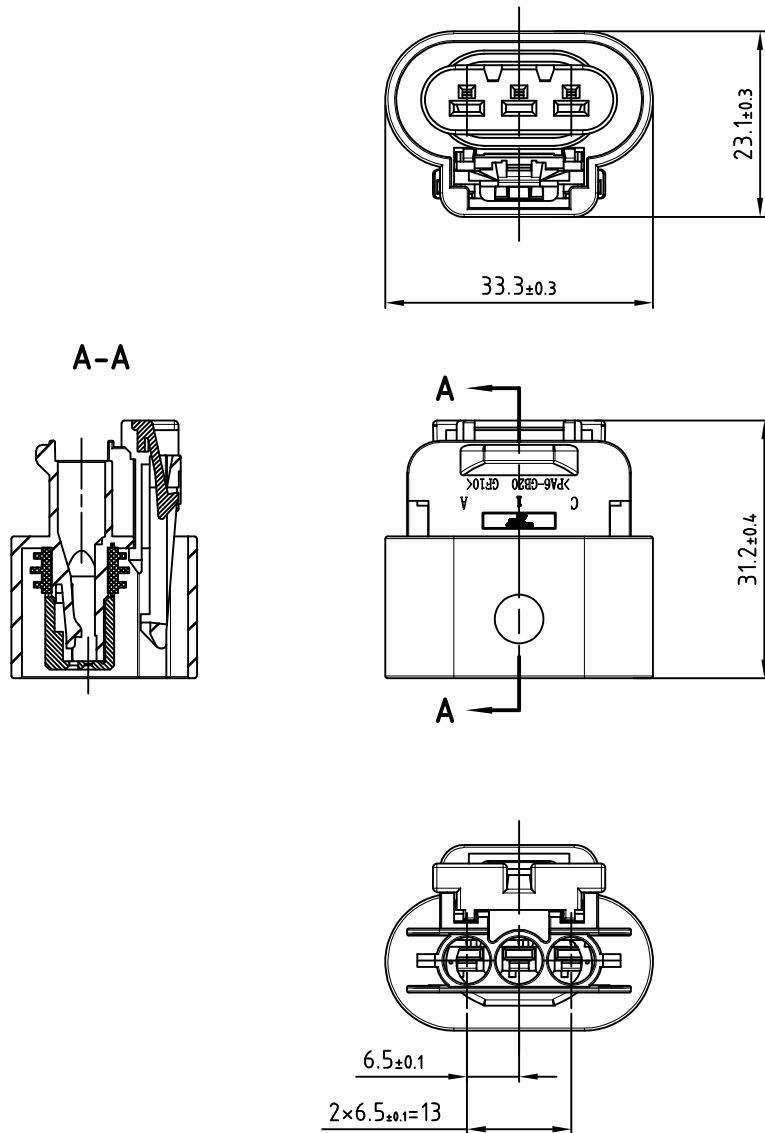


NOTES:

- 1.Working temperature range: -40℃ TO +125℃.
- 2.UL Flame resistance rating:UL-94 V2

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector
					DrawingNo	XF7032-2.8-21Bk
					Material	PA66+GF
Design	Lai	2025.12	Revision	01	Color	Black
Proofread	Yang	2025.12			Weight Kg	
Approval	Zhang	2025.12	Scale	1.5:1		Pages