
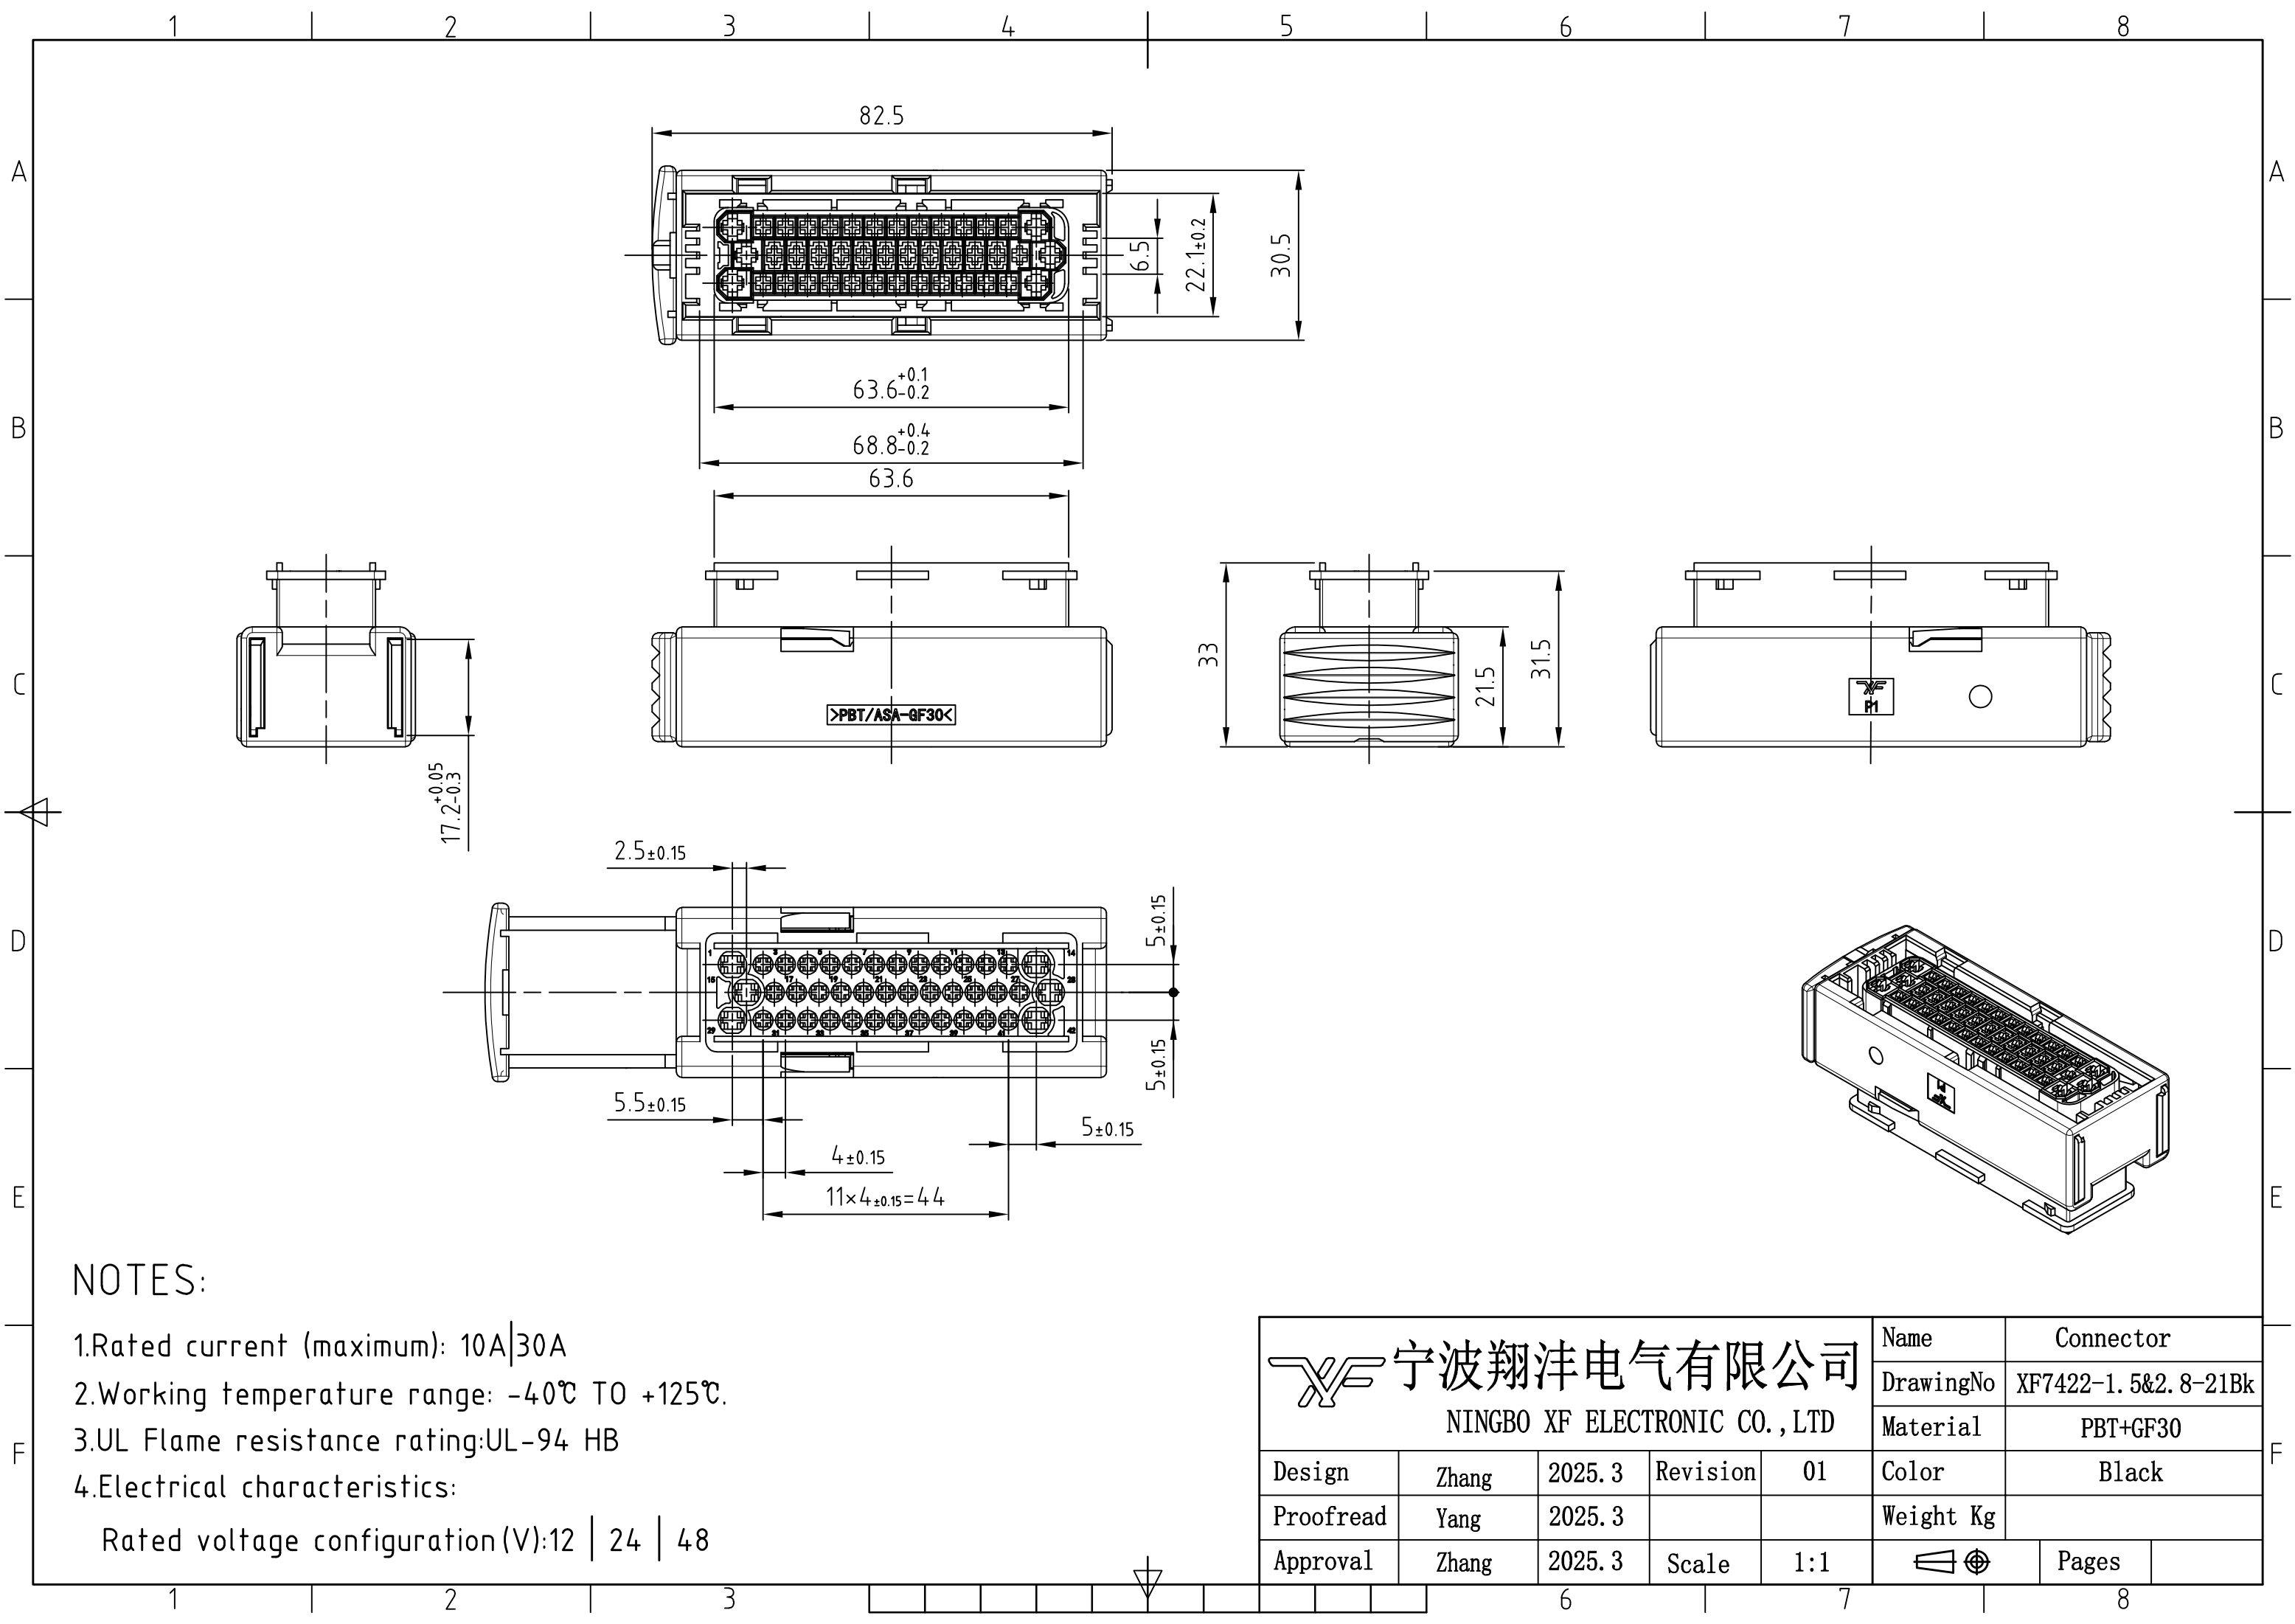




NOTES:

- 1.Rated current (maximum): 10A|30A
- 2.Working temperature range: -40℃ TO +125℃.
- 3.UL Flame resistance rating:UL-94 HB
- 4.Electrical characteristics:
Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name		Connector	
					DrawingNo		XF7422-1.5&2.8-21Bk	
					Material		PBT+GF30	
Design	Zhang	2025.3	Revision	01	Color		Black	
Proofread	Yang	2025.3			Weight Kg			
Approval	Zhang	2025.3	Scale	1:1			Pages	