

A
B
C
D
E
F

A

B

C

D

E

F

A
B
C
D
E
F

A








B

C

D

E

F

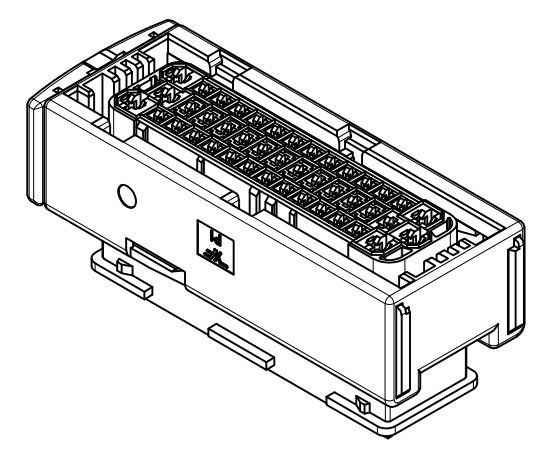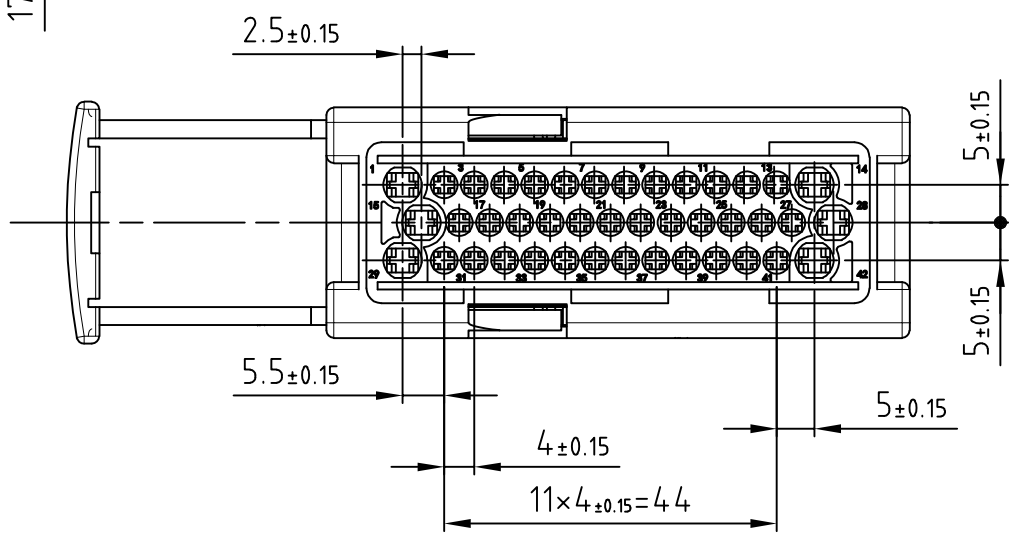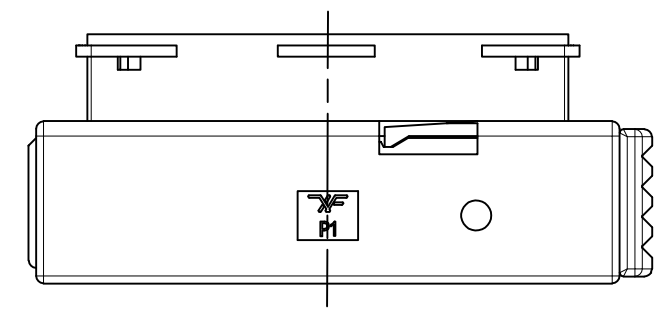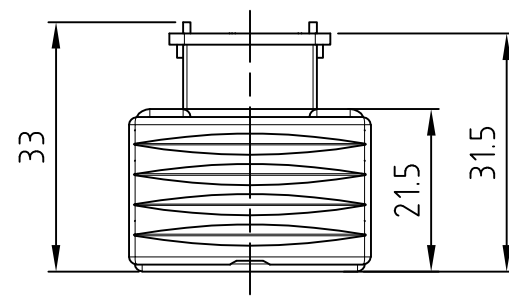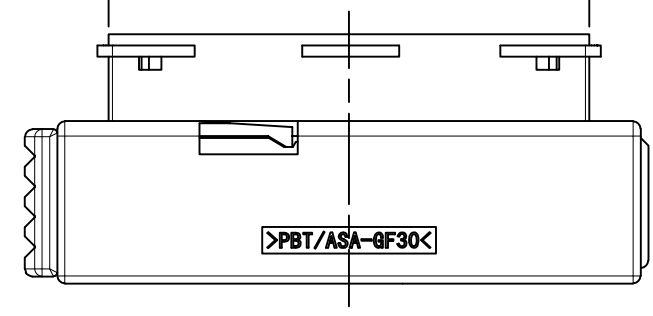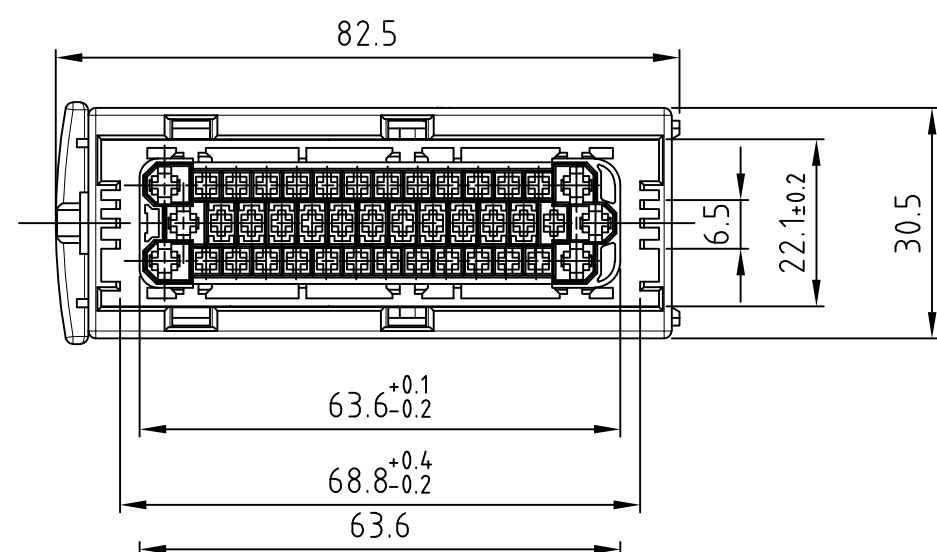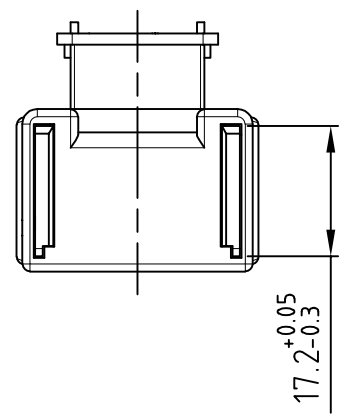

注:

- 端子额定电流 (最大值) (A):10A|30A
- 工作温度: -40℃~125℃
- UL阻燃性等级:UL-94 HB
- 电气特征:标称电压架构 (V):12|24|48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名称	连接件		
					型号	XF7422-1.5&2.8-21Bk		
					材料	PBT+GF30		
设计	Lai	2025.3	标准化		颜色	黑色		
校对	Yang	2025.3			重量			
审核	Zhang	2025.3	比例	1:1	阶段标记		版次	01
未注公差: XX.X ±0.2;					A		页数	