
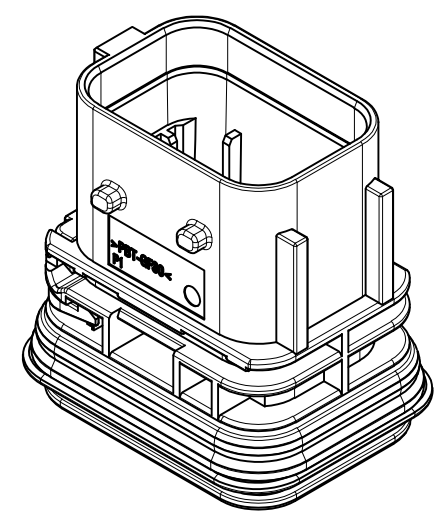
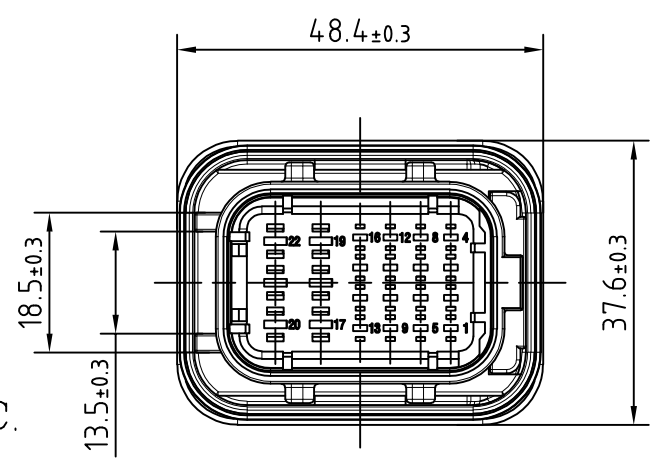
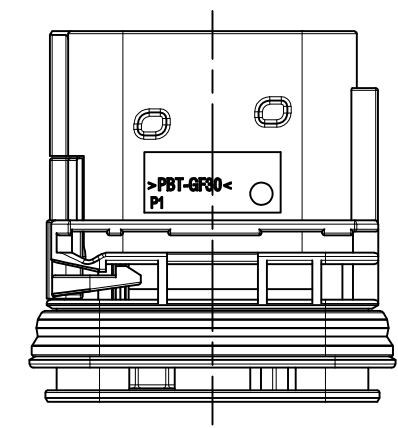
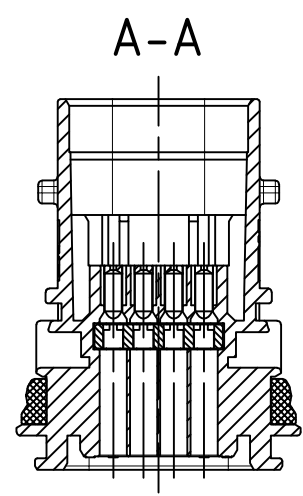
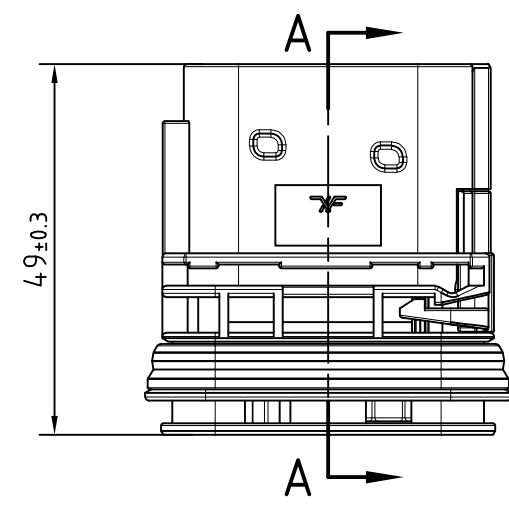
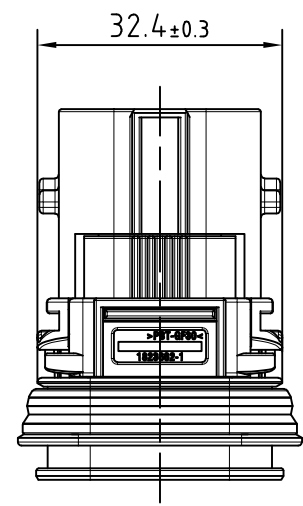


A
B
C
D
E
F

12345678


REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD

A
B
C
D
E
F

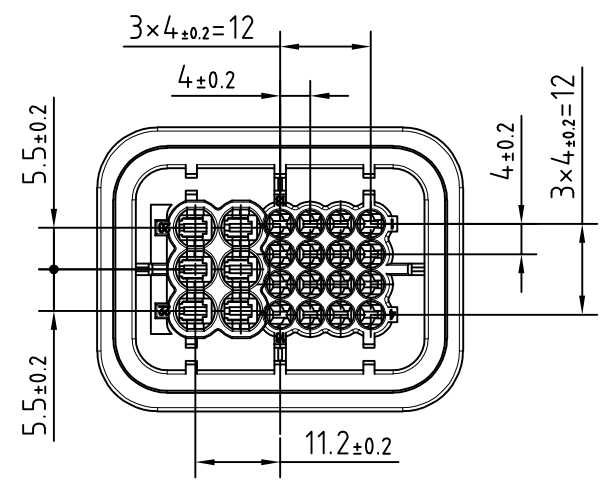

NOTES:

- 1.Rated current (maximum): 10A|30A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.Moisture resistance:IP67,IP69K.
- 4.UL Flame resistance rating:UL-94 HB
- 5.Electrical characteristics:
Working voltage (VDC):42
Working voltage (VAC):42
Rated voltage configuration (V):12 | 24

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name	Connector
					DrawingNo	XF7221-1.5&2.8-11Gr
					Material	PBT+GF
Design	ZJH	2026.7	Revision	01	Color	Grey
Proofread	TXW	2026.7			Weight Kg	
Approval	ZC	2026.7	Scale	1:1		Sheet 1 of 1

12345678