

A

B

C

D

E

F

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD

A




B

C

D

E

F

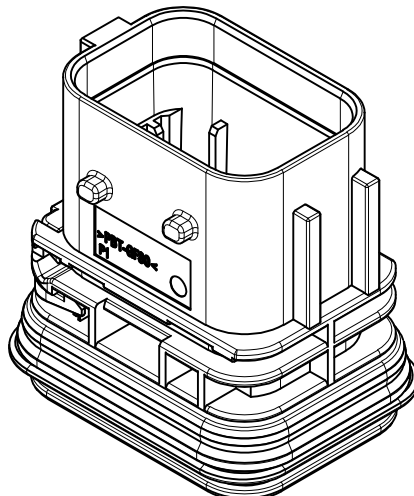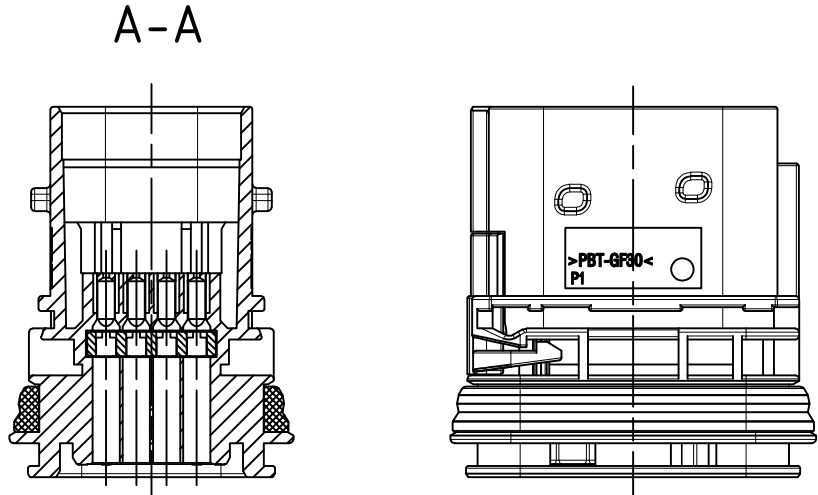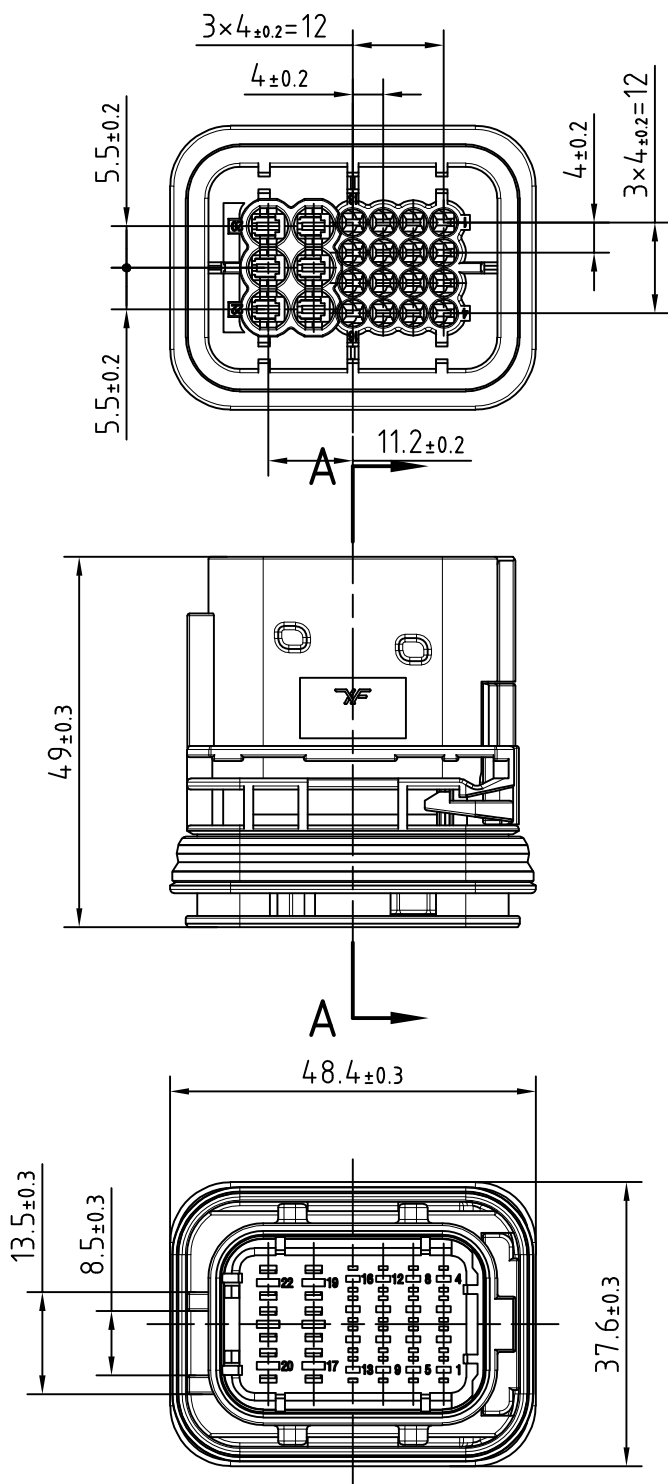

NOTES:

- Rated current (maximum): 10A|30A.
- Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
- Moisture resistance: IP67, IP69K.
- UL Flame resistance rating: UL-94 HB
- Electrical characteristics:
Working voltage (VDC): 42
Working voltage (VAC): 42
Rated voltage configuration (V): 12 | 24

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name	Connector
					DrawingNo	XF7221-1.5&2. 8-11Bk
					Material	PBT+GF
Design	ZJH	2026.7	Revision	01	Color	Black
Proofread	TXW	2026.7			Weight Kg	
Approval	ZC	2026.7	Scale	1:1		Sheet 1 of 1