
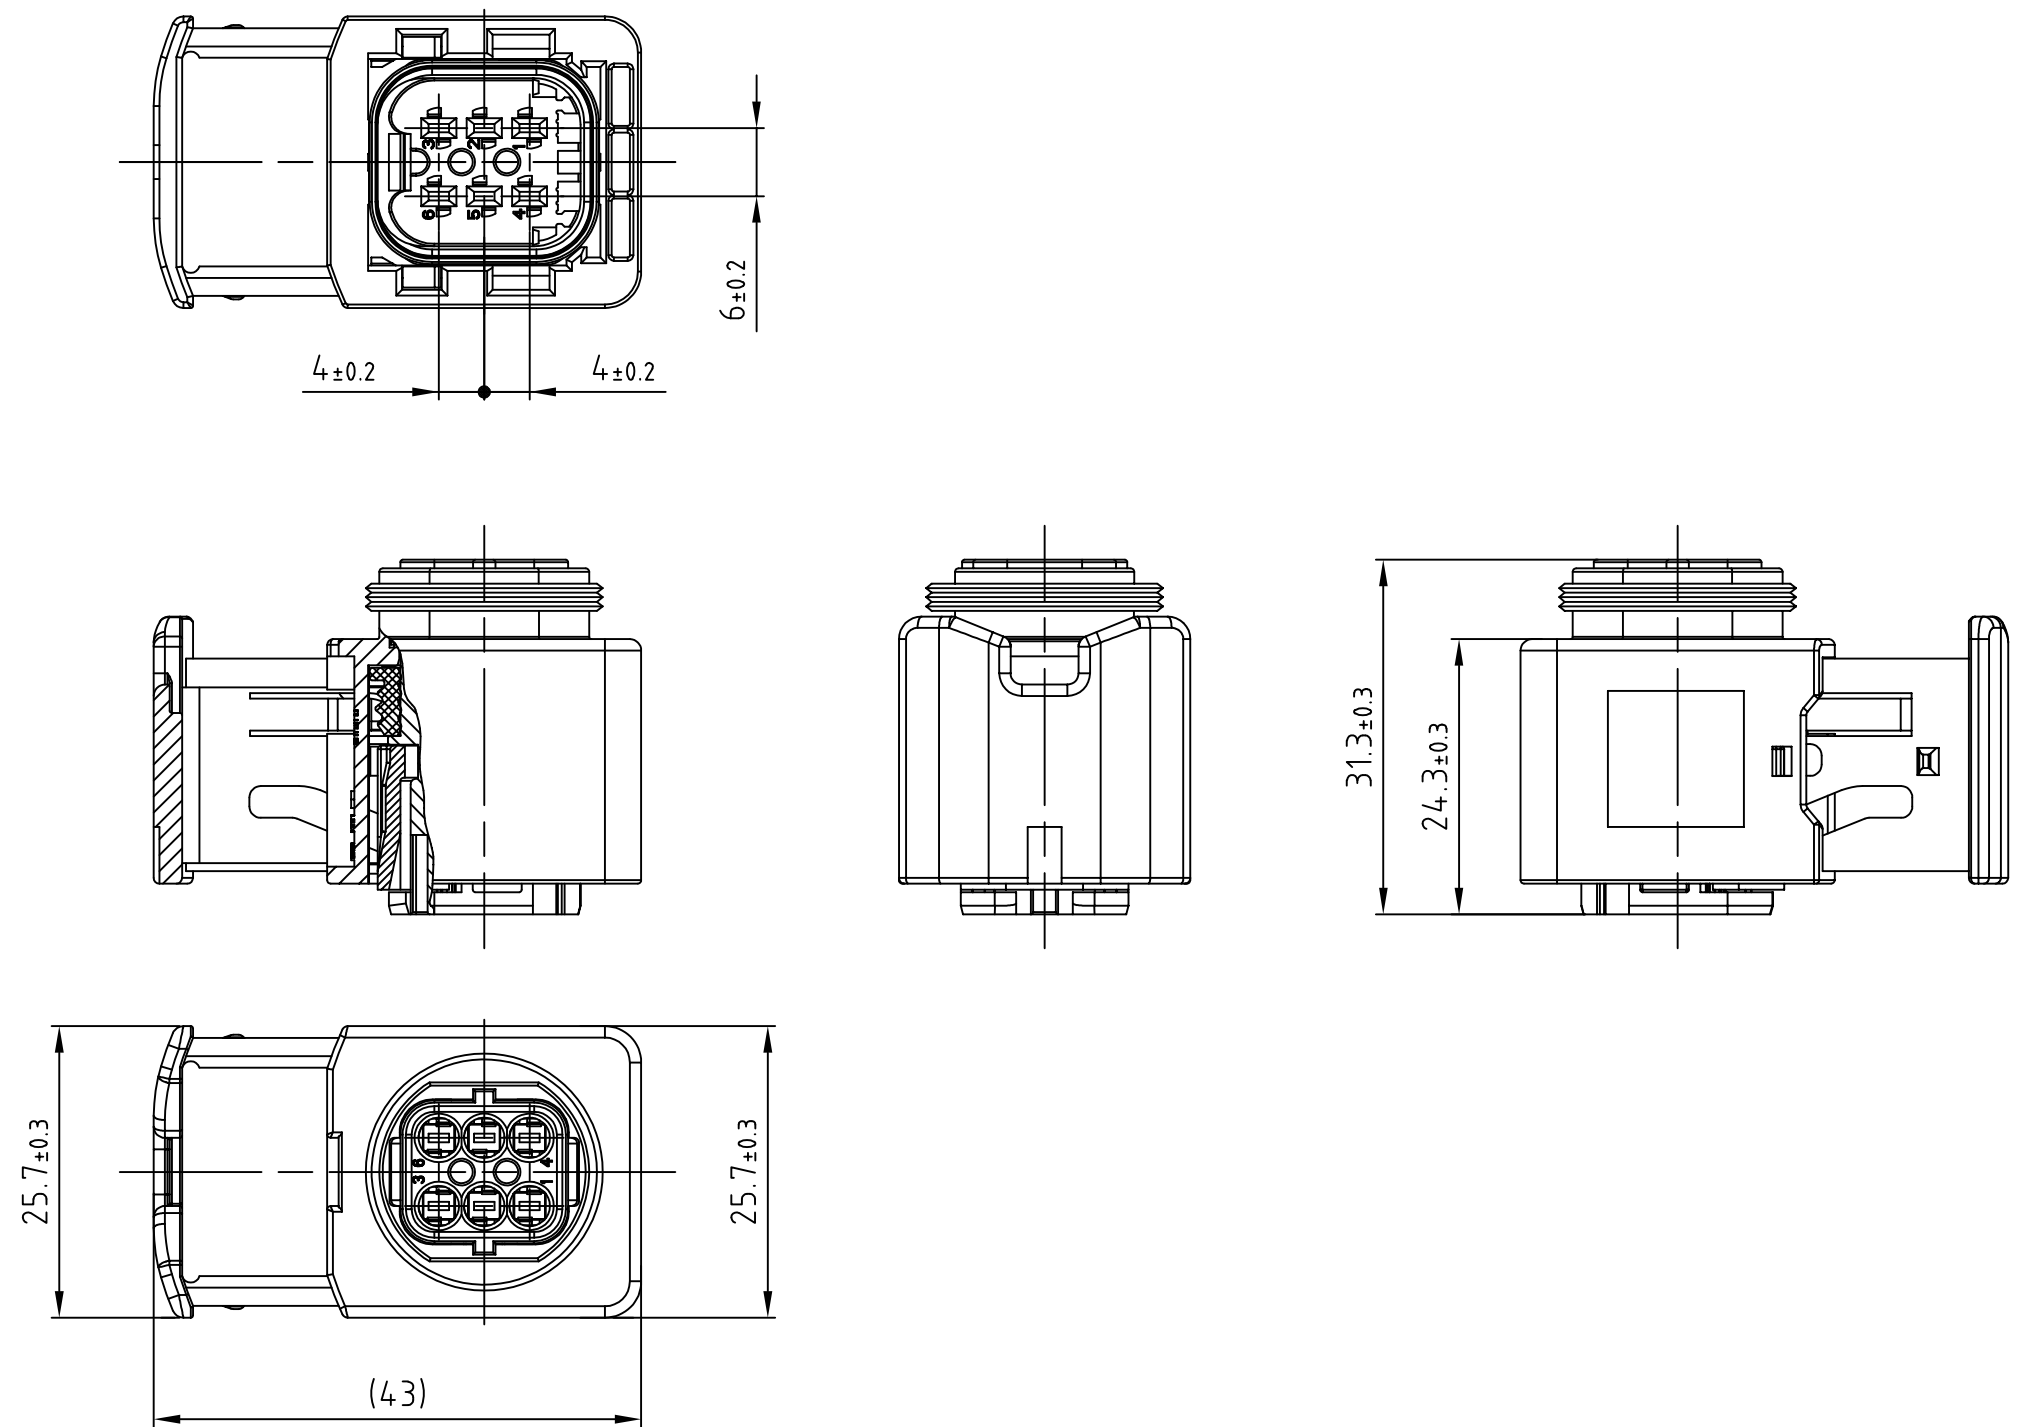


A
B
C
D
E
F



NOTES:

- 1.Rated current (maximum): 20A.
- 2.Working temperature range: -40℃ TO +140℃.
- 3.Moisture resistance:IP67.
- 4.UL Flame resistance rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):60
Rated voltage configuration (V):12 | 24 | 48

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XF7063-1.5-21Gr	
					Material	PBT+GF30	
Design	Lai	2026.3	Revision	01	Color	Grey	
Proofread	Yang	2026.3			Weight Kg		
Approval	Zhang	2026.3	Scale	1.5:1		Pages	