


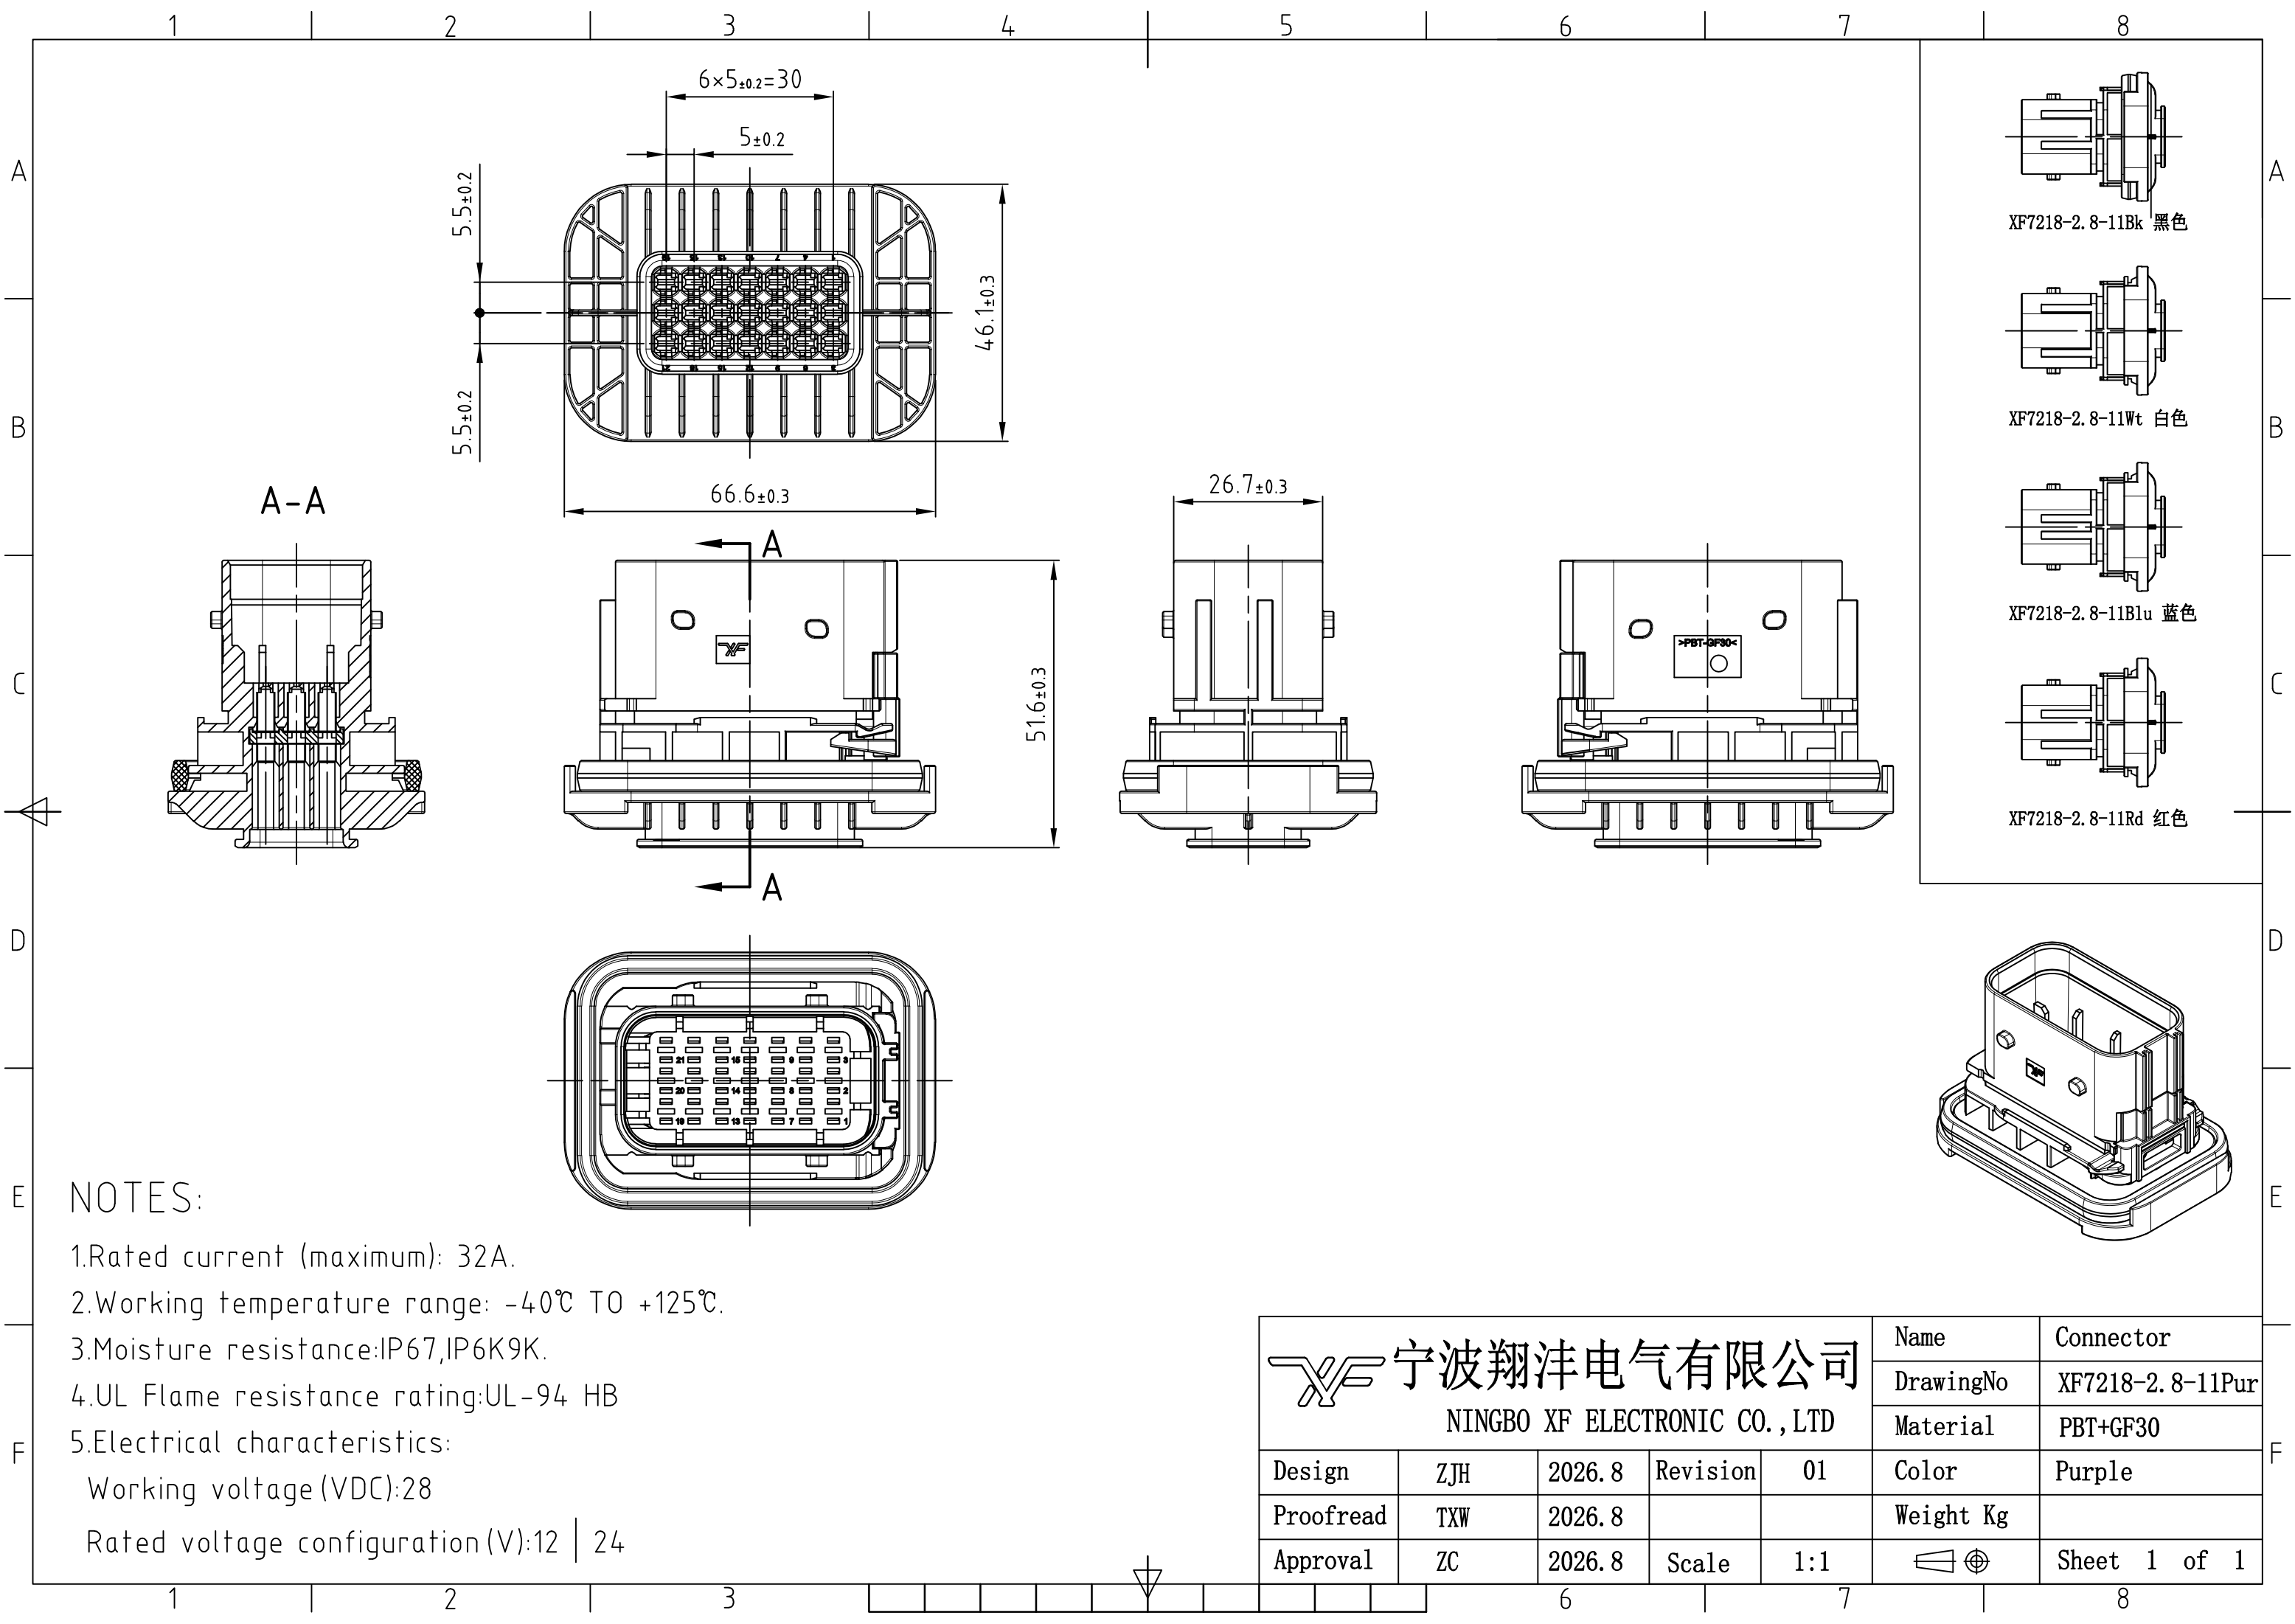

NOTES:

- Rated current (maximum): 32A.
- Working temperature range: -40℃ TO +125℃.
- Moisture resistance: IP67, IP6K9K.
- UL Flame resistance rating: UL-94 HB
- Electrical characteristics:
Working voltage (VDC): 28
Rated voltage configuration (V): 12 | 24

宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

XF 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name	Connector
					DrawingNo	XF7218-2.8-11Pur
					Material	PBT+GF30
Design	ZJH	2026.8	Revision	01	Color	Purple
Proofread	TXW	2026.8			Weight Kg	
Approval	ZC	2026.8	Scale	1:1		Sheet 1 of 1