

A

B

C

D

E

F

A

B








C

D

E

F

| REVISIONS |             |      |     |      |
|-----------|-------------|------|-----|------|
| LTR       | DESCRIPTION | DATE | DWN | APVD |
|           |             |      |     |      |
|           |             |      |     |      |

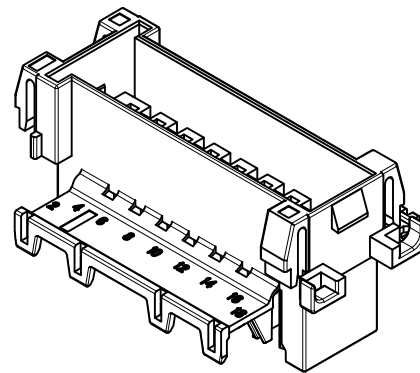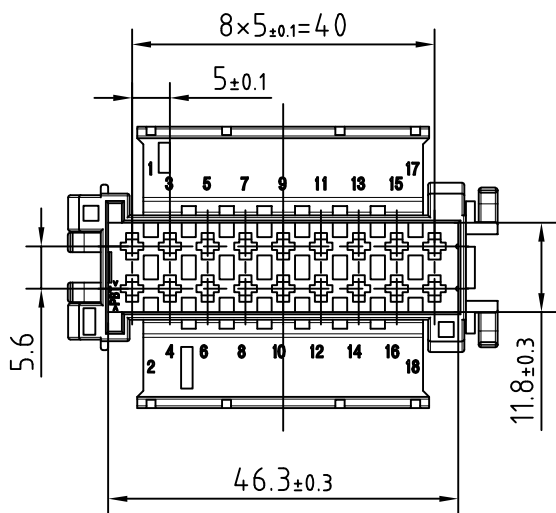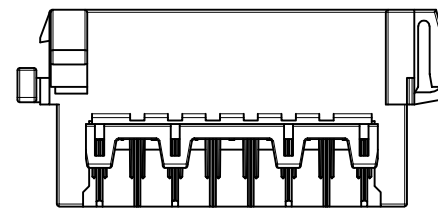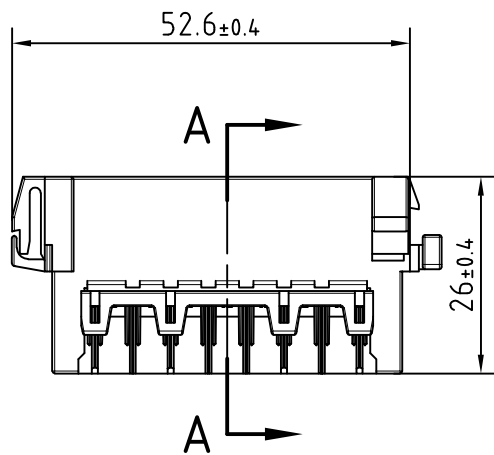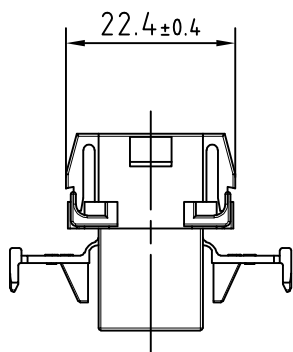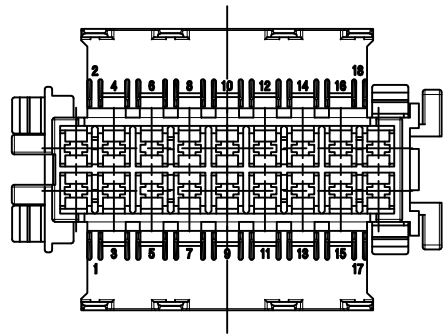

NOTES:

- Rated current (maximum):30A.
- Working temperature range: -40℃ TO +125℃.
- UL Flame resistance rating:UL-94 HB
- Electrical characteristics:  
Rated voltage configuration (V):12

|                                                                                                                                   |     |        |          |     |                                                                                       |                 |
|-----------------------------------------------------------------------------------------------------------------------------------|-----|--------|----------|-----|---------------------------------------------------------------------------------------|-----------------|
|  宁波翔沣电气有限公司<br>NINGBO XF ELECTRONIC CO., LTD |     |        |          |     | Name                                                                                  | Connector       |
|                                                                                                                                   |     |        |          |     | DrawingNo                                                                             | XF7183-2.8-11Bk |
|                                                                                                                                   |     |        |          |     | Material                                                                              | PBT             |
| Design                                                                                                                            | LCY | 2026.8 | Revision | 01  | Color                                                                                 | Black           |
| Proofread                                                                                                                         | TXW | 2026.8 |          |     | Weight Kg                                                                             |                 |
| Approval                                                                                                                          | ZC  | 2026.8 | Scale    | 1:1 |  | Sheet 1 of 1    |