
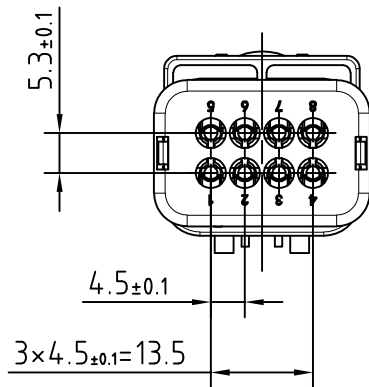
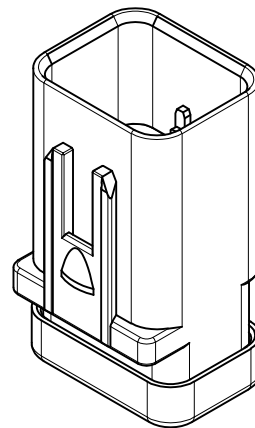
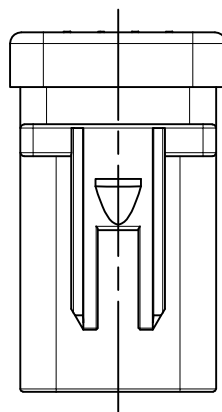
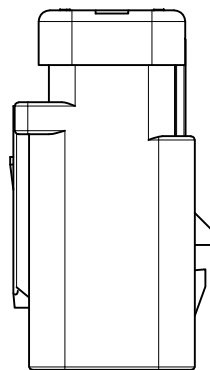
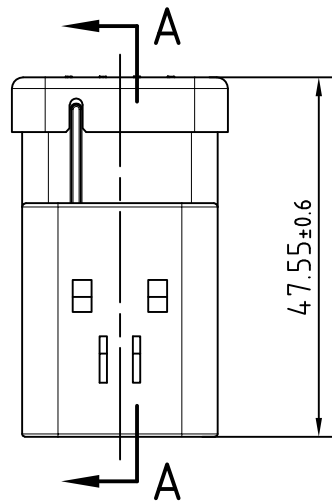
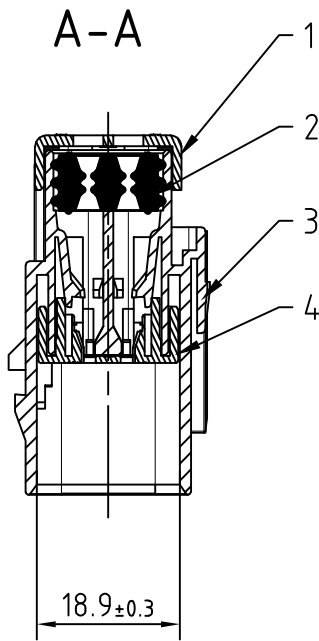


A
B
C
D
E
F

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD

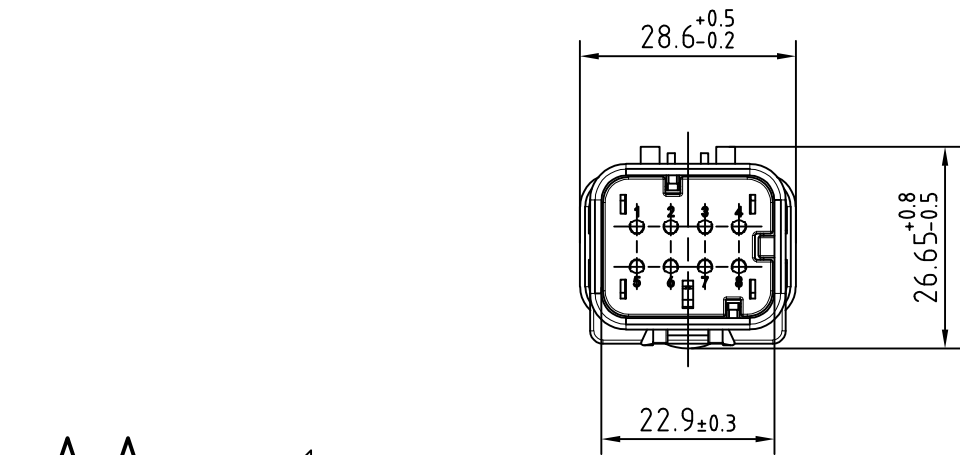

NOTES:

- 1.Working temperature range: -40℃ TO +120℃.
- 2.Moisture resistance:IP67.
- 3.UL Flame resistance rating:UL-94 HB
- 4.Electrical characteristics:
Working voltage (VDC):250
Rated voltage configuration (V):12 | 24 | 48|240

4	TPA	PBT+GF15	Red	1
3	Housing	PBT+GF15	Black	1
2	Wire seal	Silicone	Red	1
1	Cover	PBT+GF15	Black	1
No.	Name	Material	Color	数量

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name	Connector
					DrawingNo	XF7081-1.5-11Rd
					Material	PBT+GF15
Design	LCY	2026.8	Revision	01	Color	Black/Red
Proofread	TXW	2026.8			Weight Kg	
Approval	ZC	2026.8	Scale	1:1		Sheet 1 of 1

A
B
C
D
E
F