


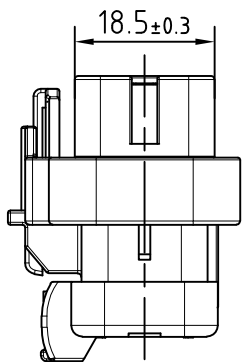
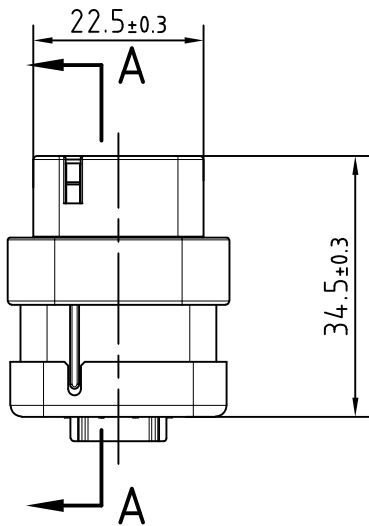
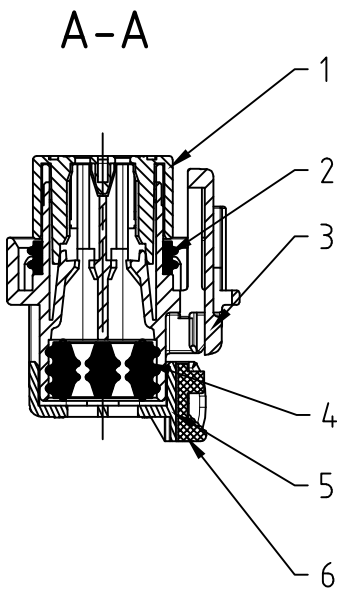



A
B
C
D
E
F

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD

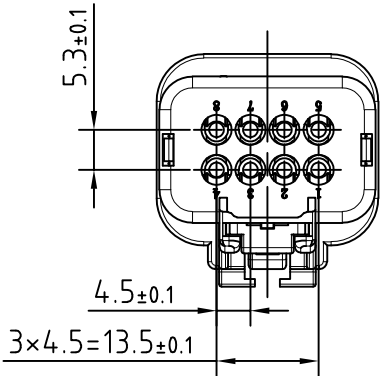

6	CPA	PBT+GF15	Red	1
5	Cover	PBT+GF15	Black	1
4	Wire seal	Silicone	Red	1
3	Housing	PBT+GF15	Black	1
2	Peripheral seal	Silicone	Red	1
1	TPA	PBT+GF15	Black	1
No.	Name	Material	Color	数量

NOTES:

1.Working temperature range: -40℃ TO +120℃.


2.Moisture resistance:IP67.

3.UL Flame resistance rating:UL-94 HB

4.Electrical characteristics:

Working voltage (VDC):250

Rated voltage configuration (V):12 | 24 | 48|240

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name	Connector
					DrawingNo	XF7081-1.5-21Rd
					Material	PBT+GF15
Design	LCY	2026.8	Revision	01	Color	Black/Red
Proofread	TXW	2026.8			Weight Kg	
Approval	ZC	2026.8	Scale	1:1		Sheet 1 of 1

A
B
C
D
E
F