



A
B
C
D
E
F

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD

A
B
C
D
E
F

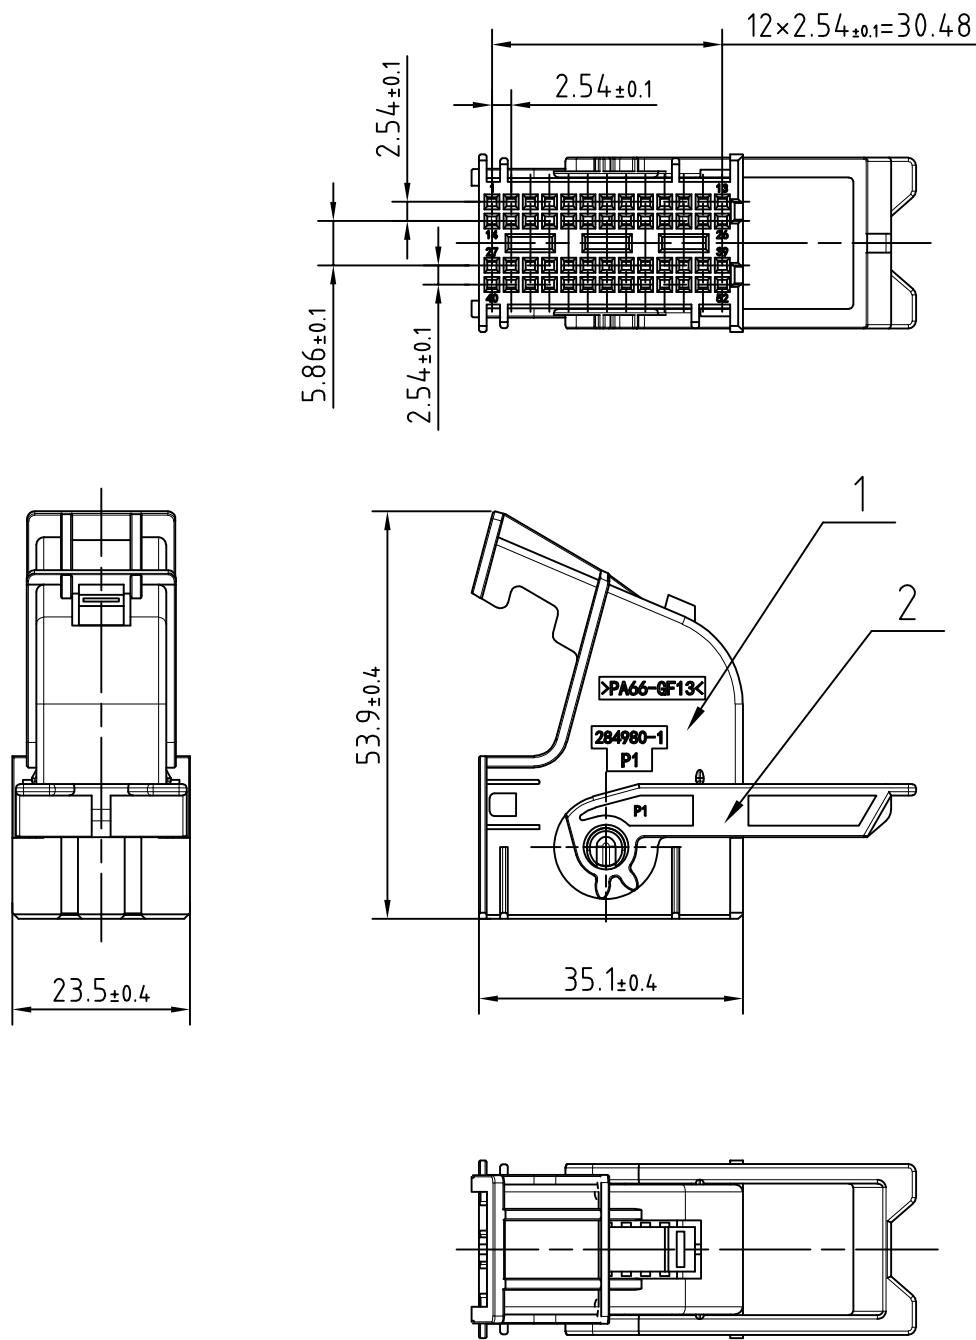

The lever position is shown in the figure during shipment

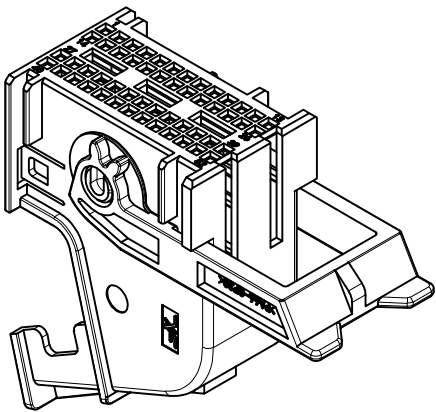


NOTES:

- 1.Rated current (maximum): 7.5A.
- 2.Working temperature range: -40℃ TO +120℃.
- 3.Moisture resistance:IPX0.
- 4.UL Flame resistance rating:UL-94 HB
- 5.Electrical characteristics:
Working voltage (VDC):24
Rated voltage configuration (V):12

2	Lever	1	PA66+GF30	Red
1	Housing	1	PA66+GF13	Black
No.	Name	Quantity	Material	Color

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector
					DrawingNo	XF7523-0.6-21Bk
					Material	PA66+GF
Design	LCY	2026.8	Revision	01	Color	Black
Proofread	TXW	2026.8			Weight Kg	
Approval	ZC	2026.8	Scale	1:1		Sheet 1 of 1