
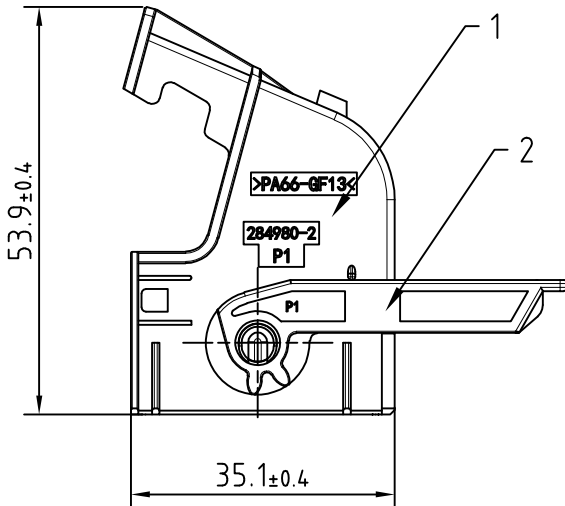
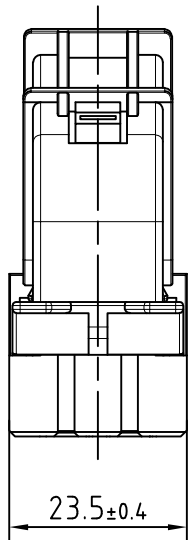
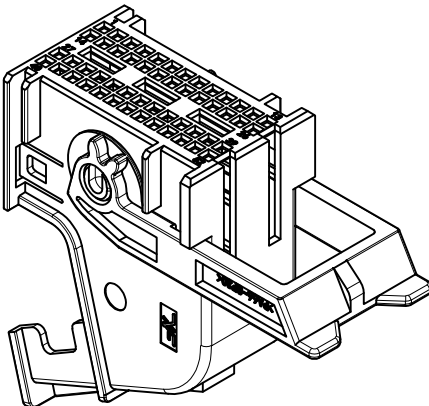




A
B
C
D
E
F

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD

A
B
C
D
E
F

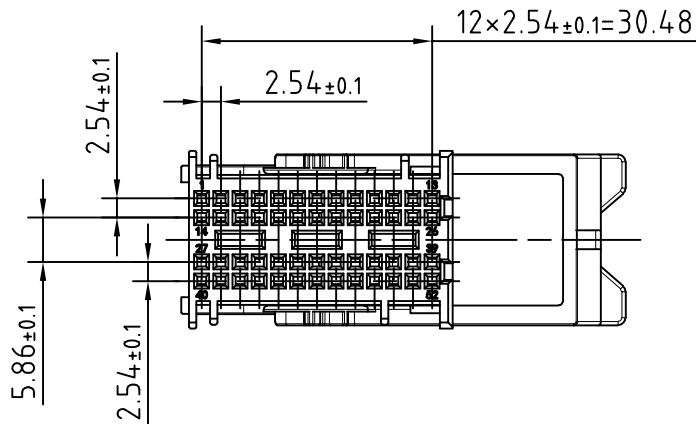


发货时锁扣位置如图

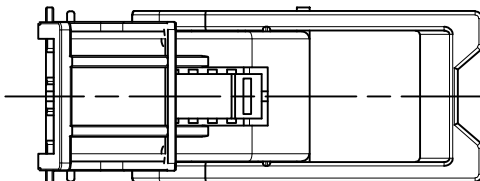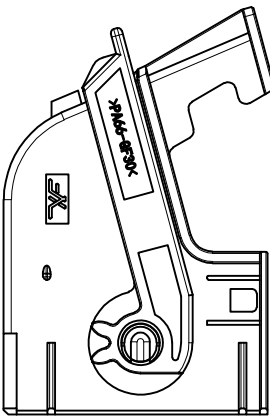

NOTES:
1.Rated current (maximum): 7.5A.
2.Working temperature range: -40℃ TO +120℃.
3.Moisture resistance:IPX0.
4.UL Flame resistance rating:UL-94 HB
5.Electrical characteristics:
Working voltage(VDC):24
Rated voltage configuration(V):12

2	Lever	1	PA66+GF30	Red
1	Housing	1	PA66+GF13	Blue
No.	Name	Quantity	Material	Color

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector
					DrawingNo	XF7523-0.6-21blu
					Material	PA66+GF
Design	LCY	2026.8	Revision	01	Color	Blue
Proofread	TXW	2026.8			Weight Kg	
Approval	ZC	2026.8	Scale	1:1		Sheet 1 of 1