


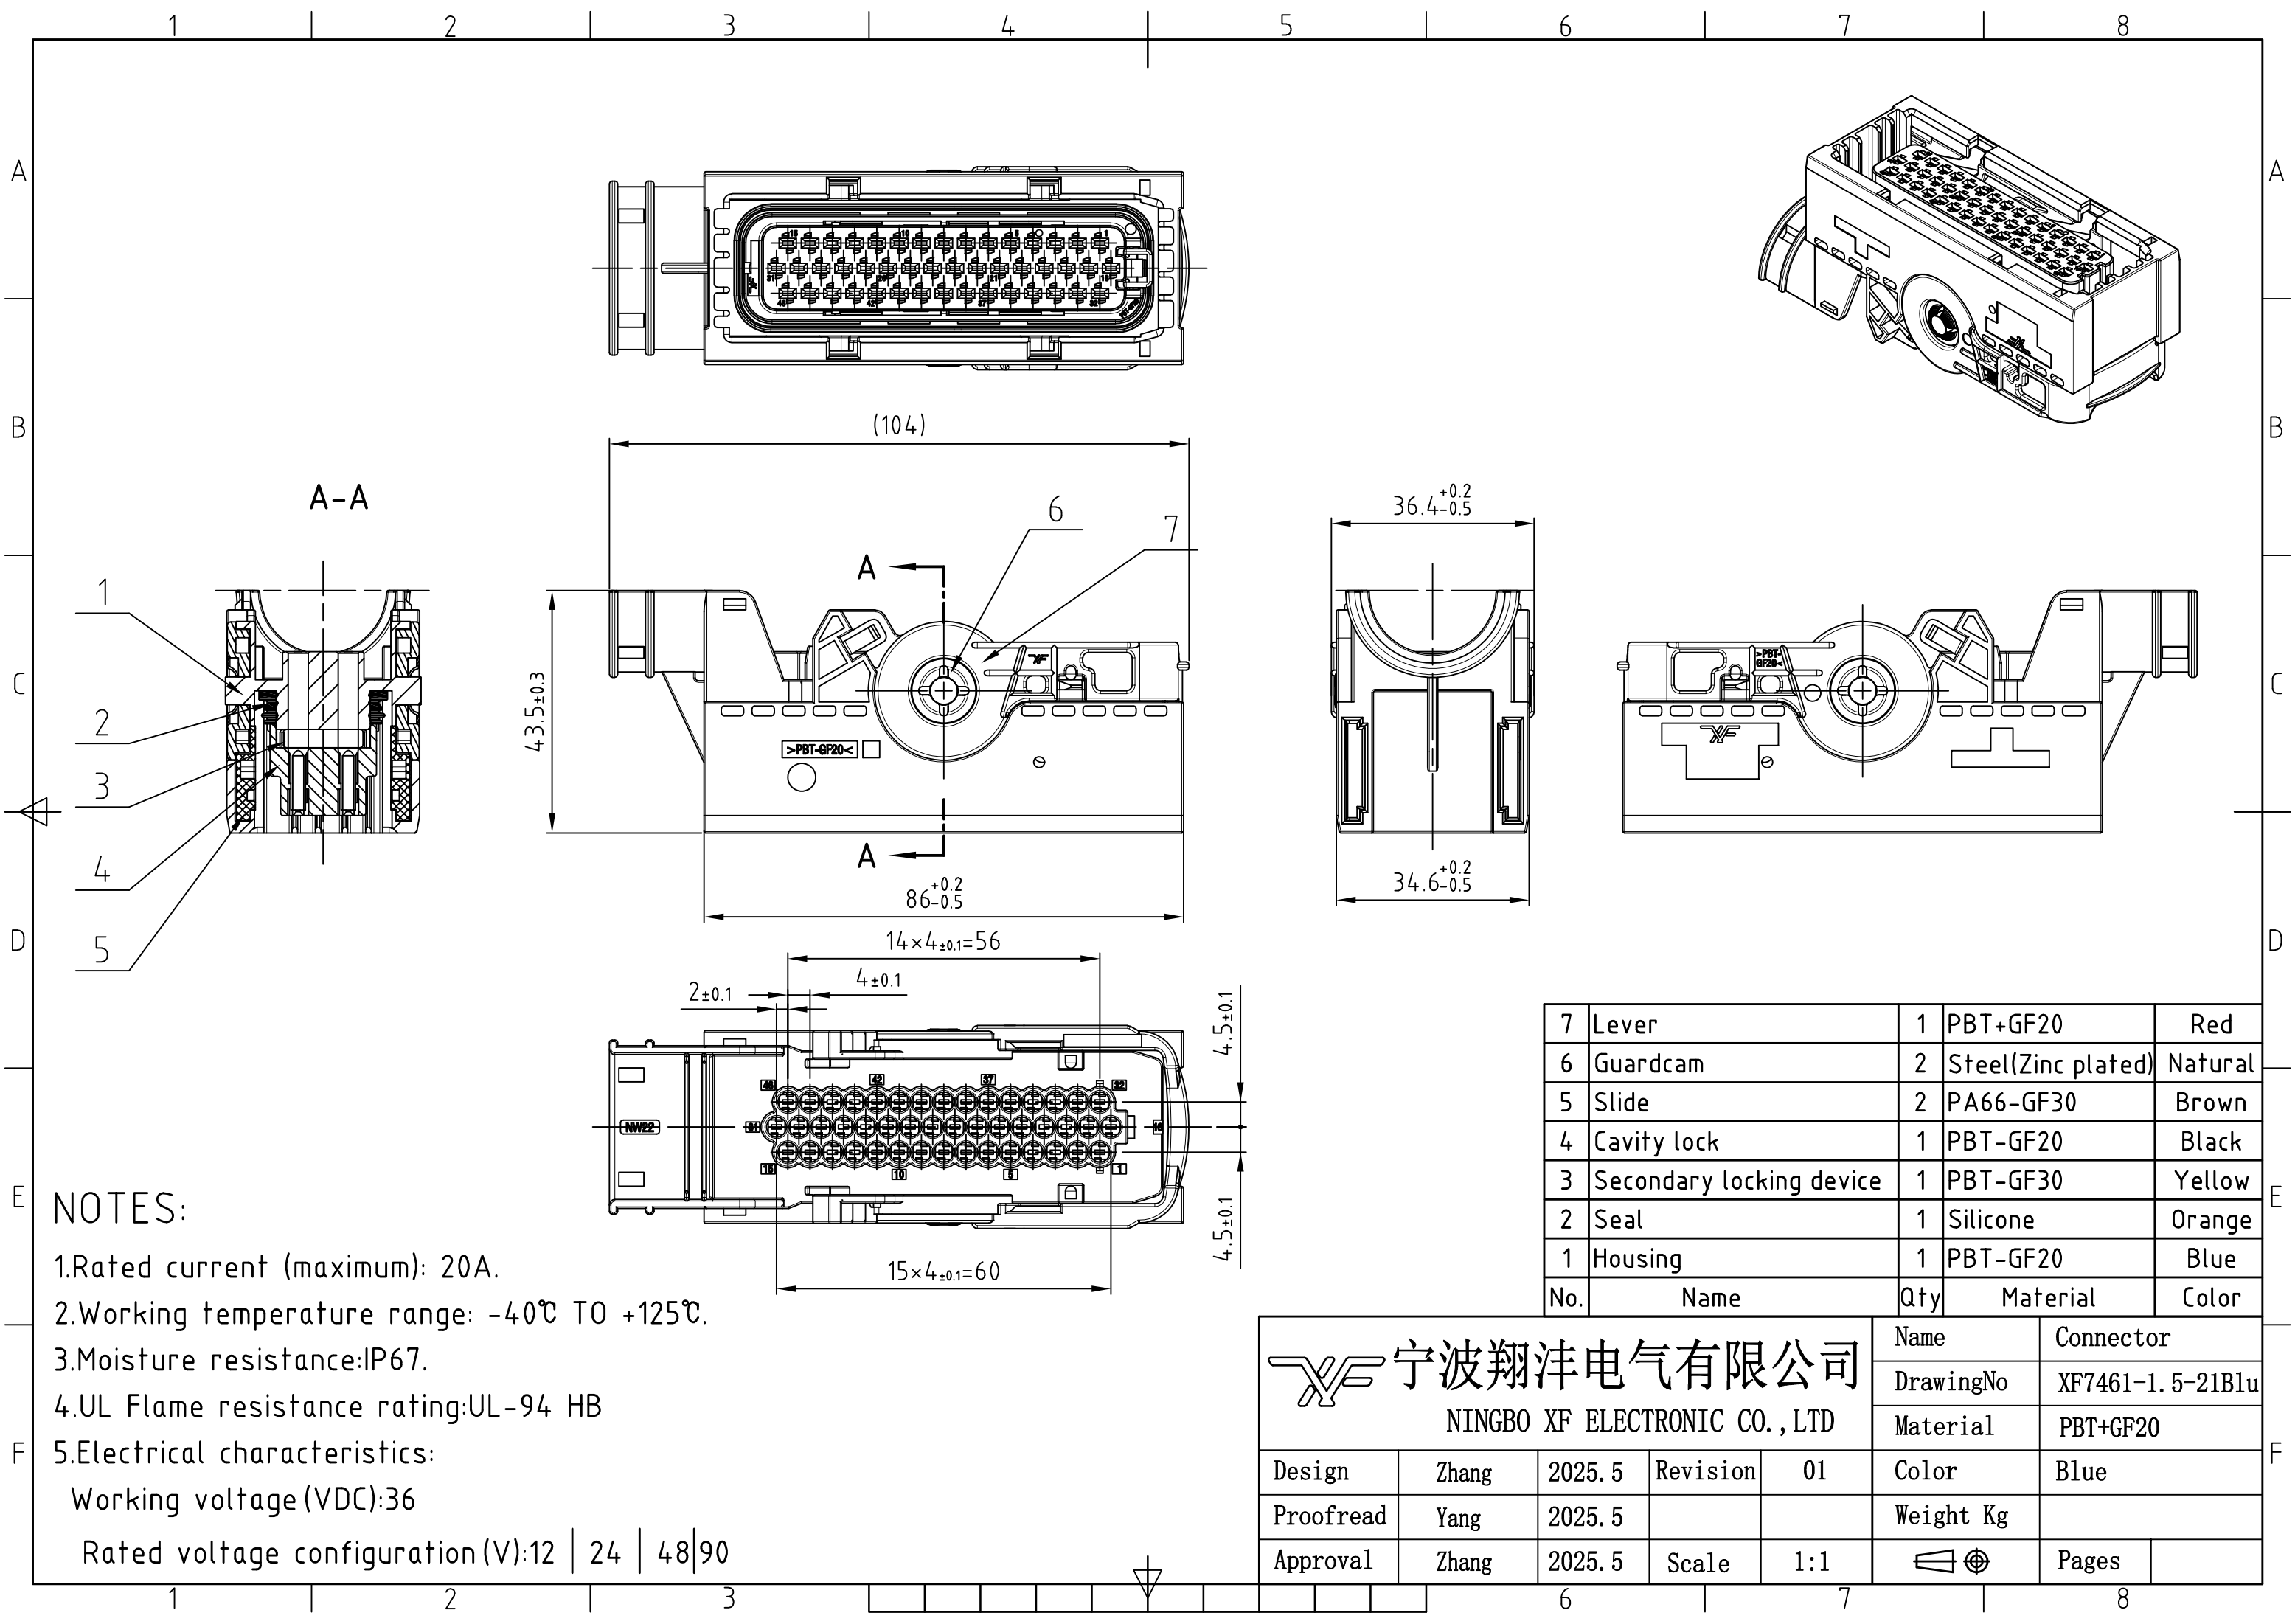

NOTES:

1.Rated current (maximum): 20A.

2.Working temperature range: -40℃ TO +125℃.

3.Moisture resistance:IP67.

4.UL Flame resistance rating:UL-94 HB

5.Electrical characteristics:

Working voltage (VDC):36

Rated voltage configuration (V):12 | 24 | 48|90

7	Lever	1	PBT+GF20	Red
6	Guardcam	2	Steel(Zinc plated)	Natural
5	Slide	2	PA66-GF30	Brown
4	Cavity lock	1	PBT-GF20	Black
3	Secondary locking device	1	PBT-GF30	Yellow
2	Seal	1	Silicone	Orange
1	Housing	1	PBT-GF20	Blue
No.	Name	Qty	Material	Color

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XF7461-1.5-21Blu	
					Material	PBT+GF20	
Design	Zhang	2025.5	Revision	01	Color	Blue	
Proofread	Yang	2025.5			Weight Kg		
Approval	Zhang	2025.5	Scale	1:1		Pages	