


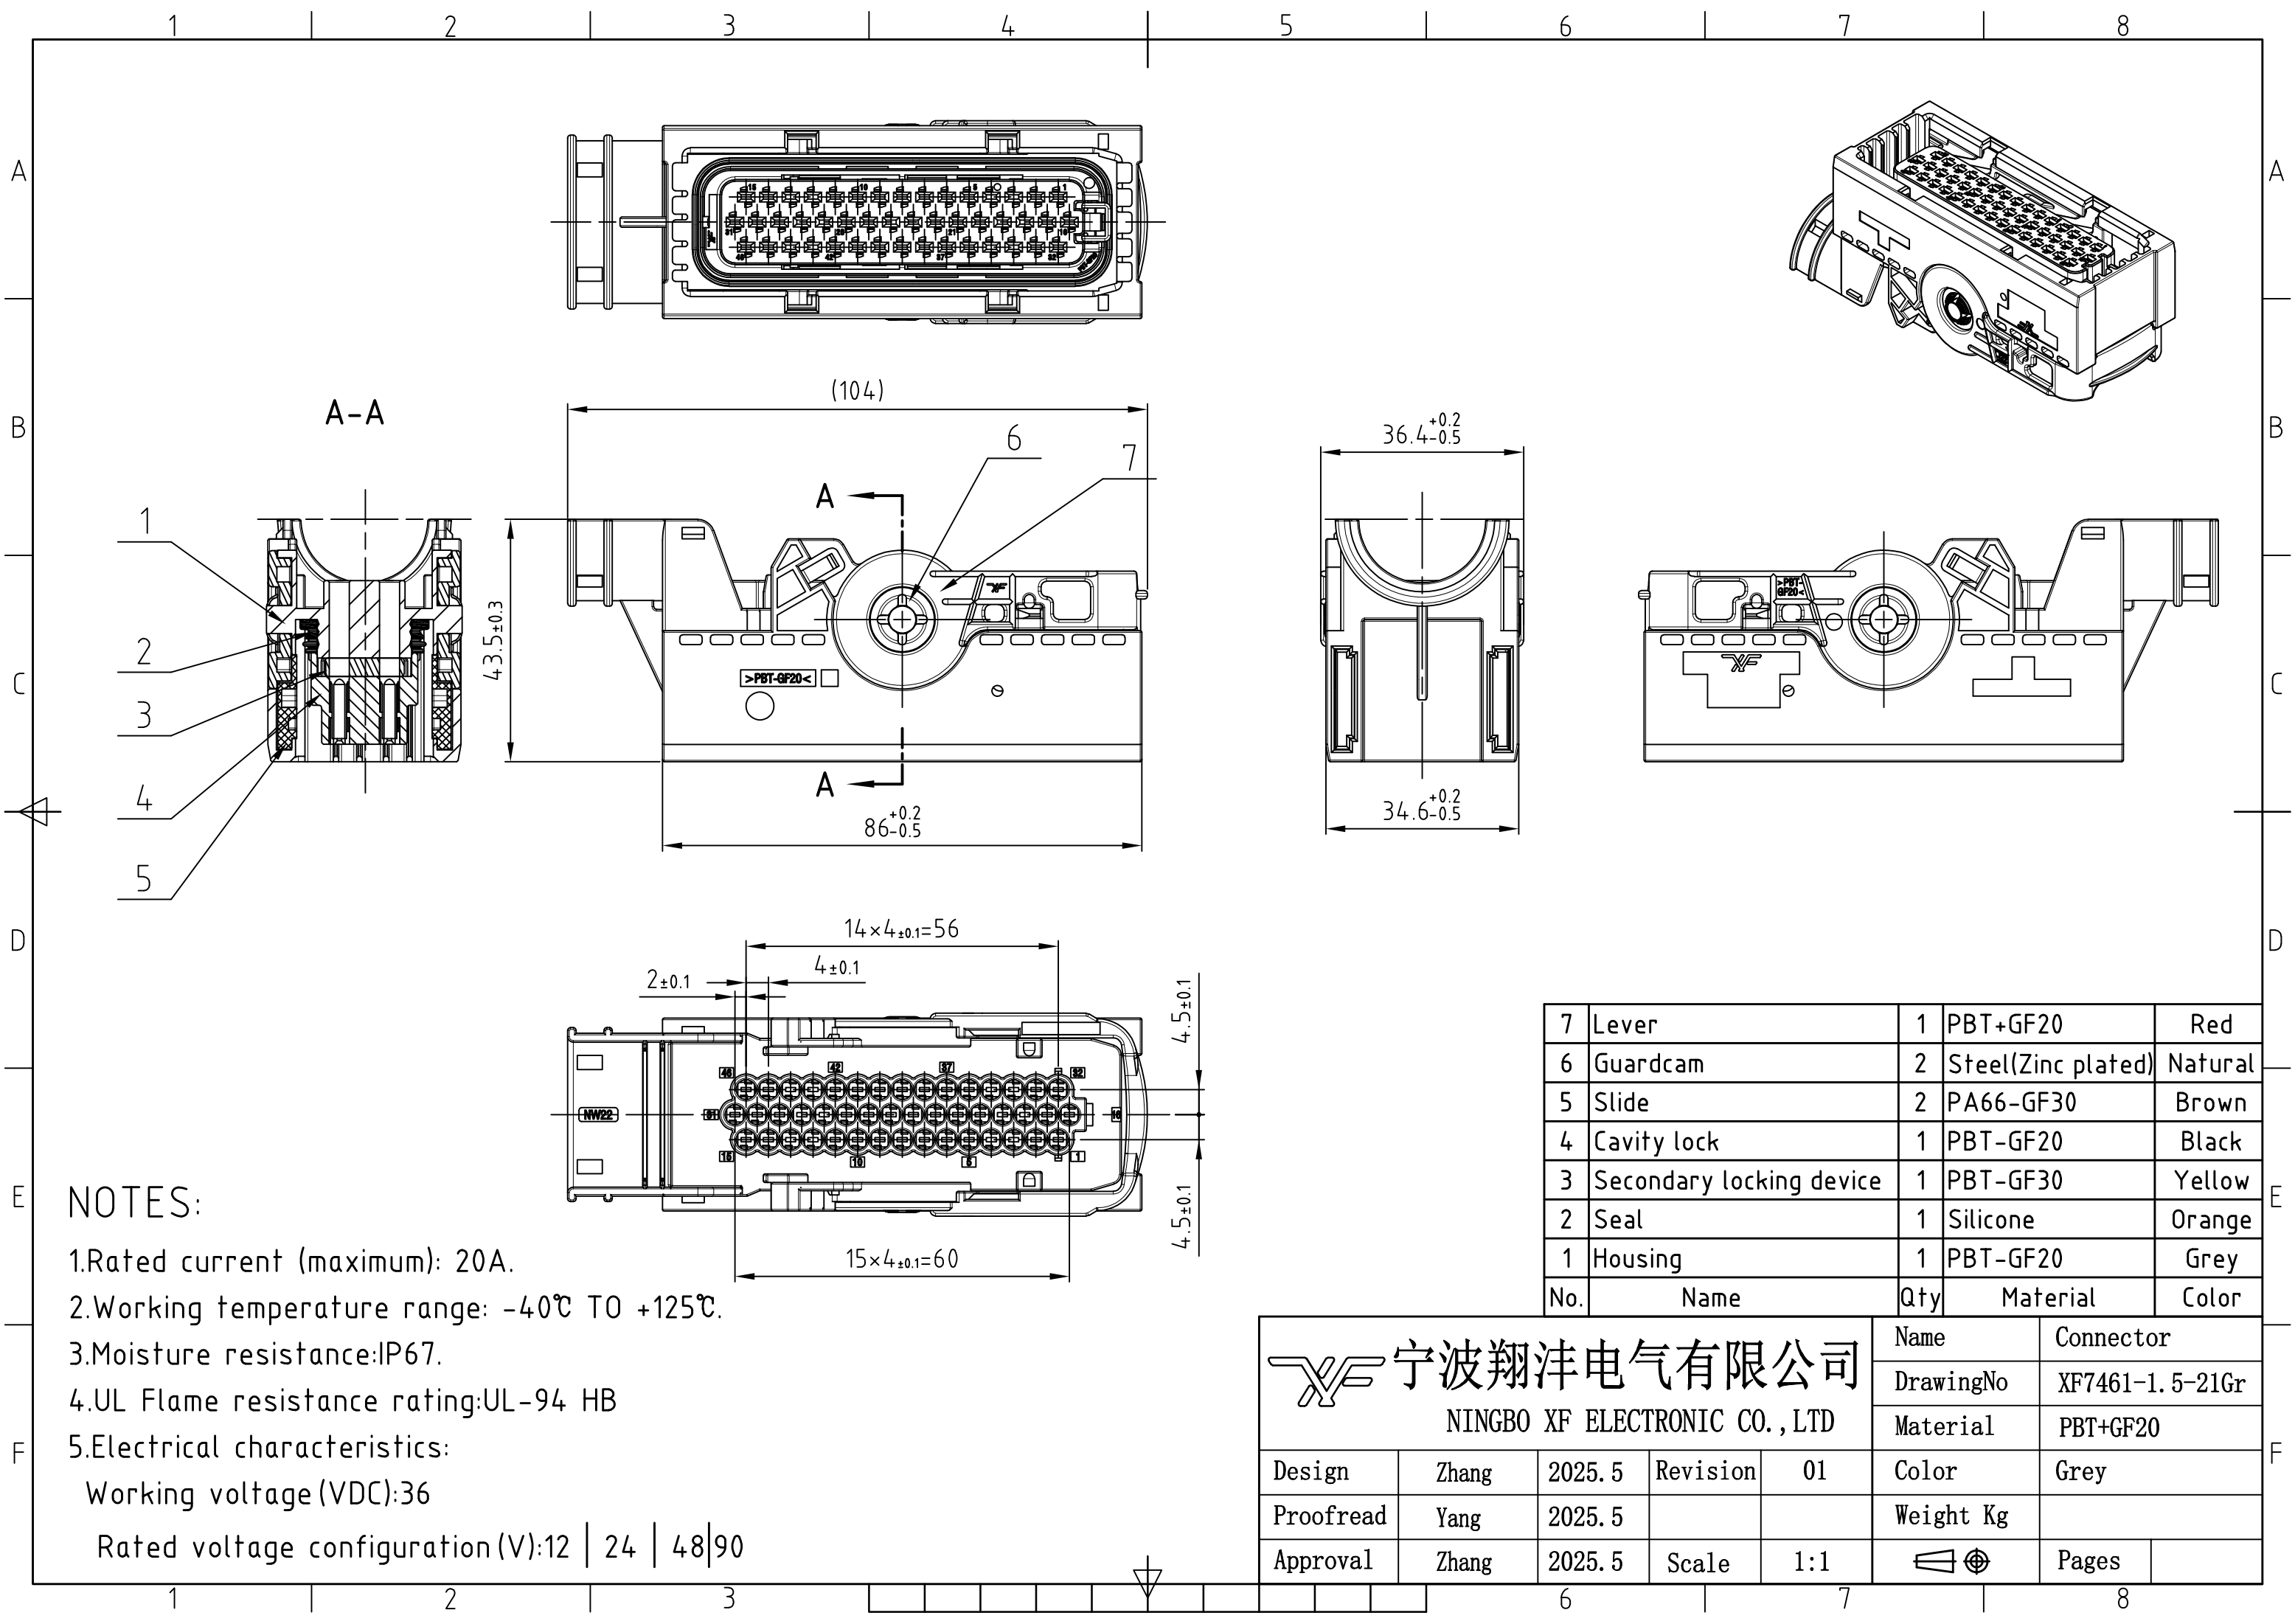

NOTES:

- 1.Rated current (maximum): 20A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.Moisture resistance:IP67.
- 4.UL Flame resistance rating:UL-94 HB
- 5.Electrical characteristics:
Working voltage (VDC):36
Rated voltage configuration (V):12 | 24 | 48|90

7	Lever	1	PBT+GF20	Red
6	Guardcam	2	Steel(Zinc plated)	Natural
5	Slide	2	PA66-GF30	Brown
4	Cavity lock	1	PBT-GF20	Black
3	Secondary locking device	1	PBT-GF30	Yellow
2	Seal	1	Silicone	Orange
1	Housing	1	PBT-GF20	Grey
No.	Name	Qty	Material	Color

XF 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name		Connector	
					DrawingNo		XF7461-1.5-21Gr	
					Material		PBT+GF20	
Design	Zhang	2025.5	Revision	01	Color		Grey	
Proofread	Yang	2025.5			Weight Kg			
Approval	Zhang	2025.5	Scale	1:1			Pages	