
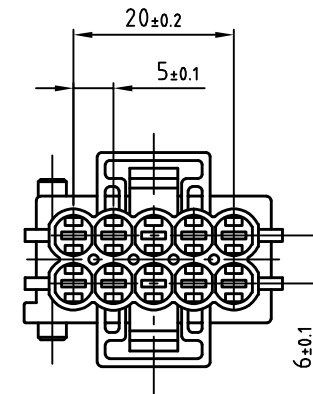
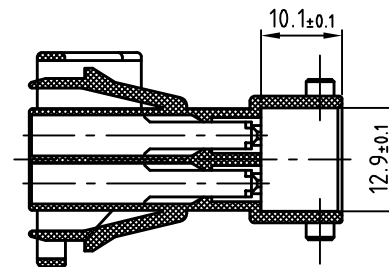
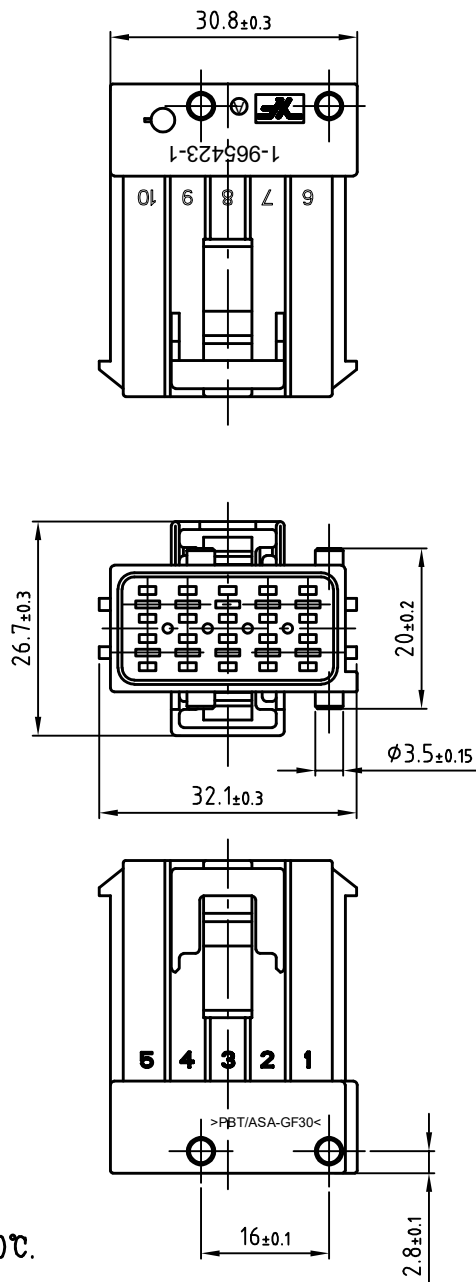


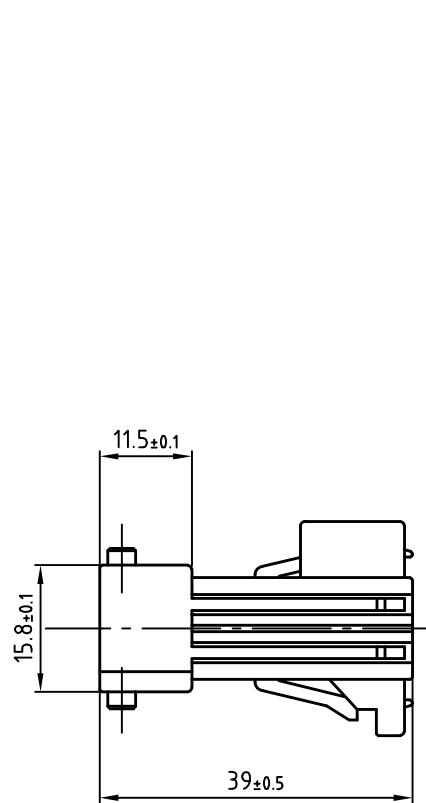

## NOTES:

1. Working temperature range:  $-40^{\circ}\text{C}$  TO  $+120^{\circ}\text{C}$ .
2. Electrical characteristics:  
Rated voltage configuration (V): 12
3. UL Flame resistance rating: UL-94 HB

 宁波翔沣电气有限公司  
NINGBO XF ELECTRONIC CO., LTD

|           |     |        |          |       |                                                                                       |                 |
|-----------|-----|--------|----------|-------|---------------------------------------------------------------------------------------|-----------------|
|           |     |        |          |       | Name                                                                                  | Connector       |
|           |     |        |          |       | DrawingNo                                                                             | XF7102-2.8-11Bk |
|           |     |        |          |       | Material                                                                              | PBT+GF          |
| Design    | YJG | 2026.7 | Revision | 01    | Color                                                                                 | Black           |
| Proofread | TXW | 2026.7 |          |       | Weight Kg                                                                             |                 |
| Approval  | ZC  | 2026.7 | Scale    | 1.5:1 |  | Pages           |