

A

B

C

D

E

F

A

B








C

D

E

F

修 订 记 录				
记 号	描 述	日 期	设 计	审 核

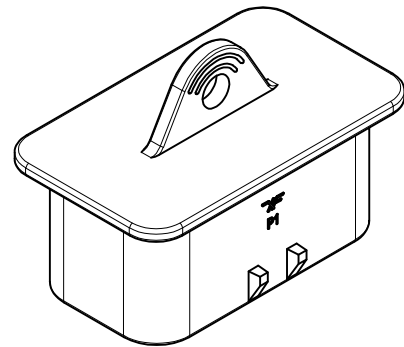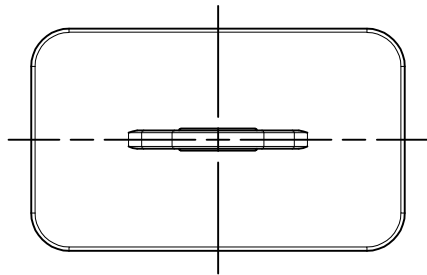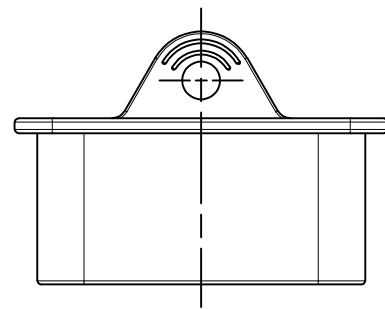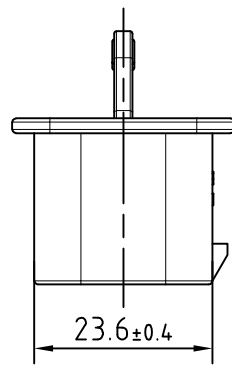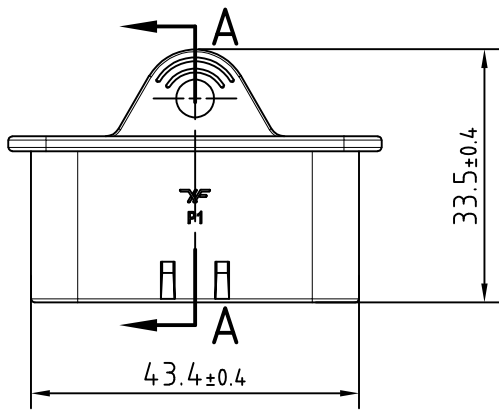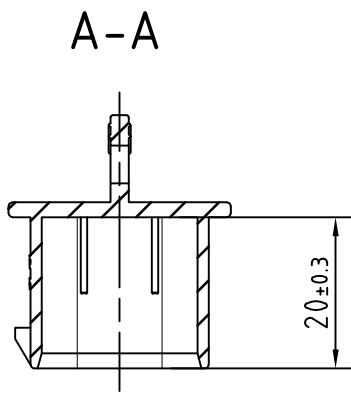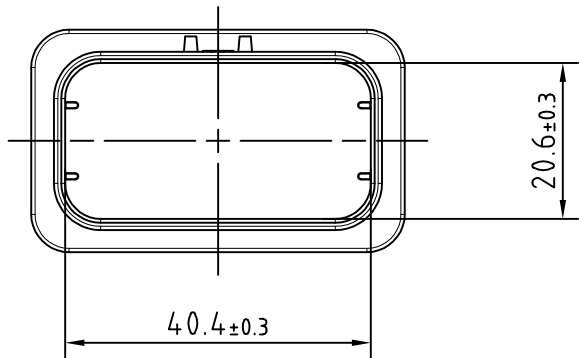

注:

- 1、工作温度: -40℃~125℃
2、UL阻燃性等级:UL-94 HB

 宁波翔沔电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名 称	护 盖		
					型 号	770680C		
					材 料	PA66+GF15		
设 计	赖春裕	2026.8	标准化		颜 色	黑色		
校 对	童旭文	2026.8			重 量			
审 核	张 超	2026.8	比 例	1:1	阶段标记		版 次	01
未注公差: XX.X ±0.2;					A		共 1 页	第 1 页