


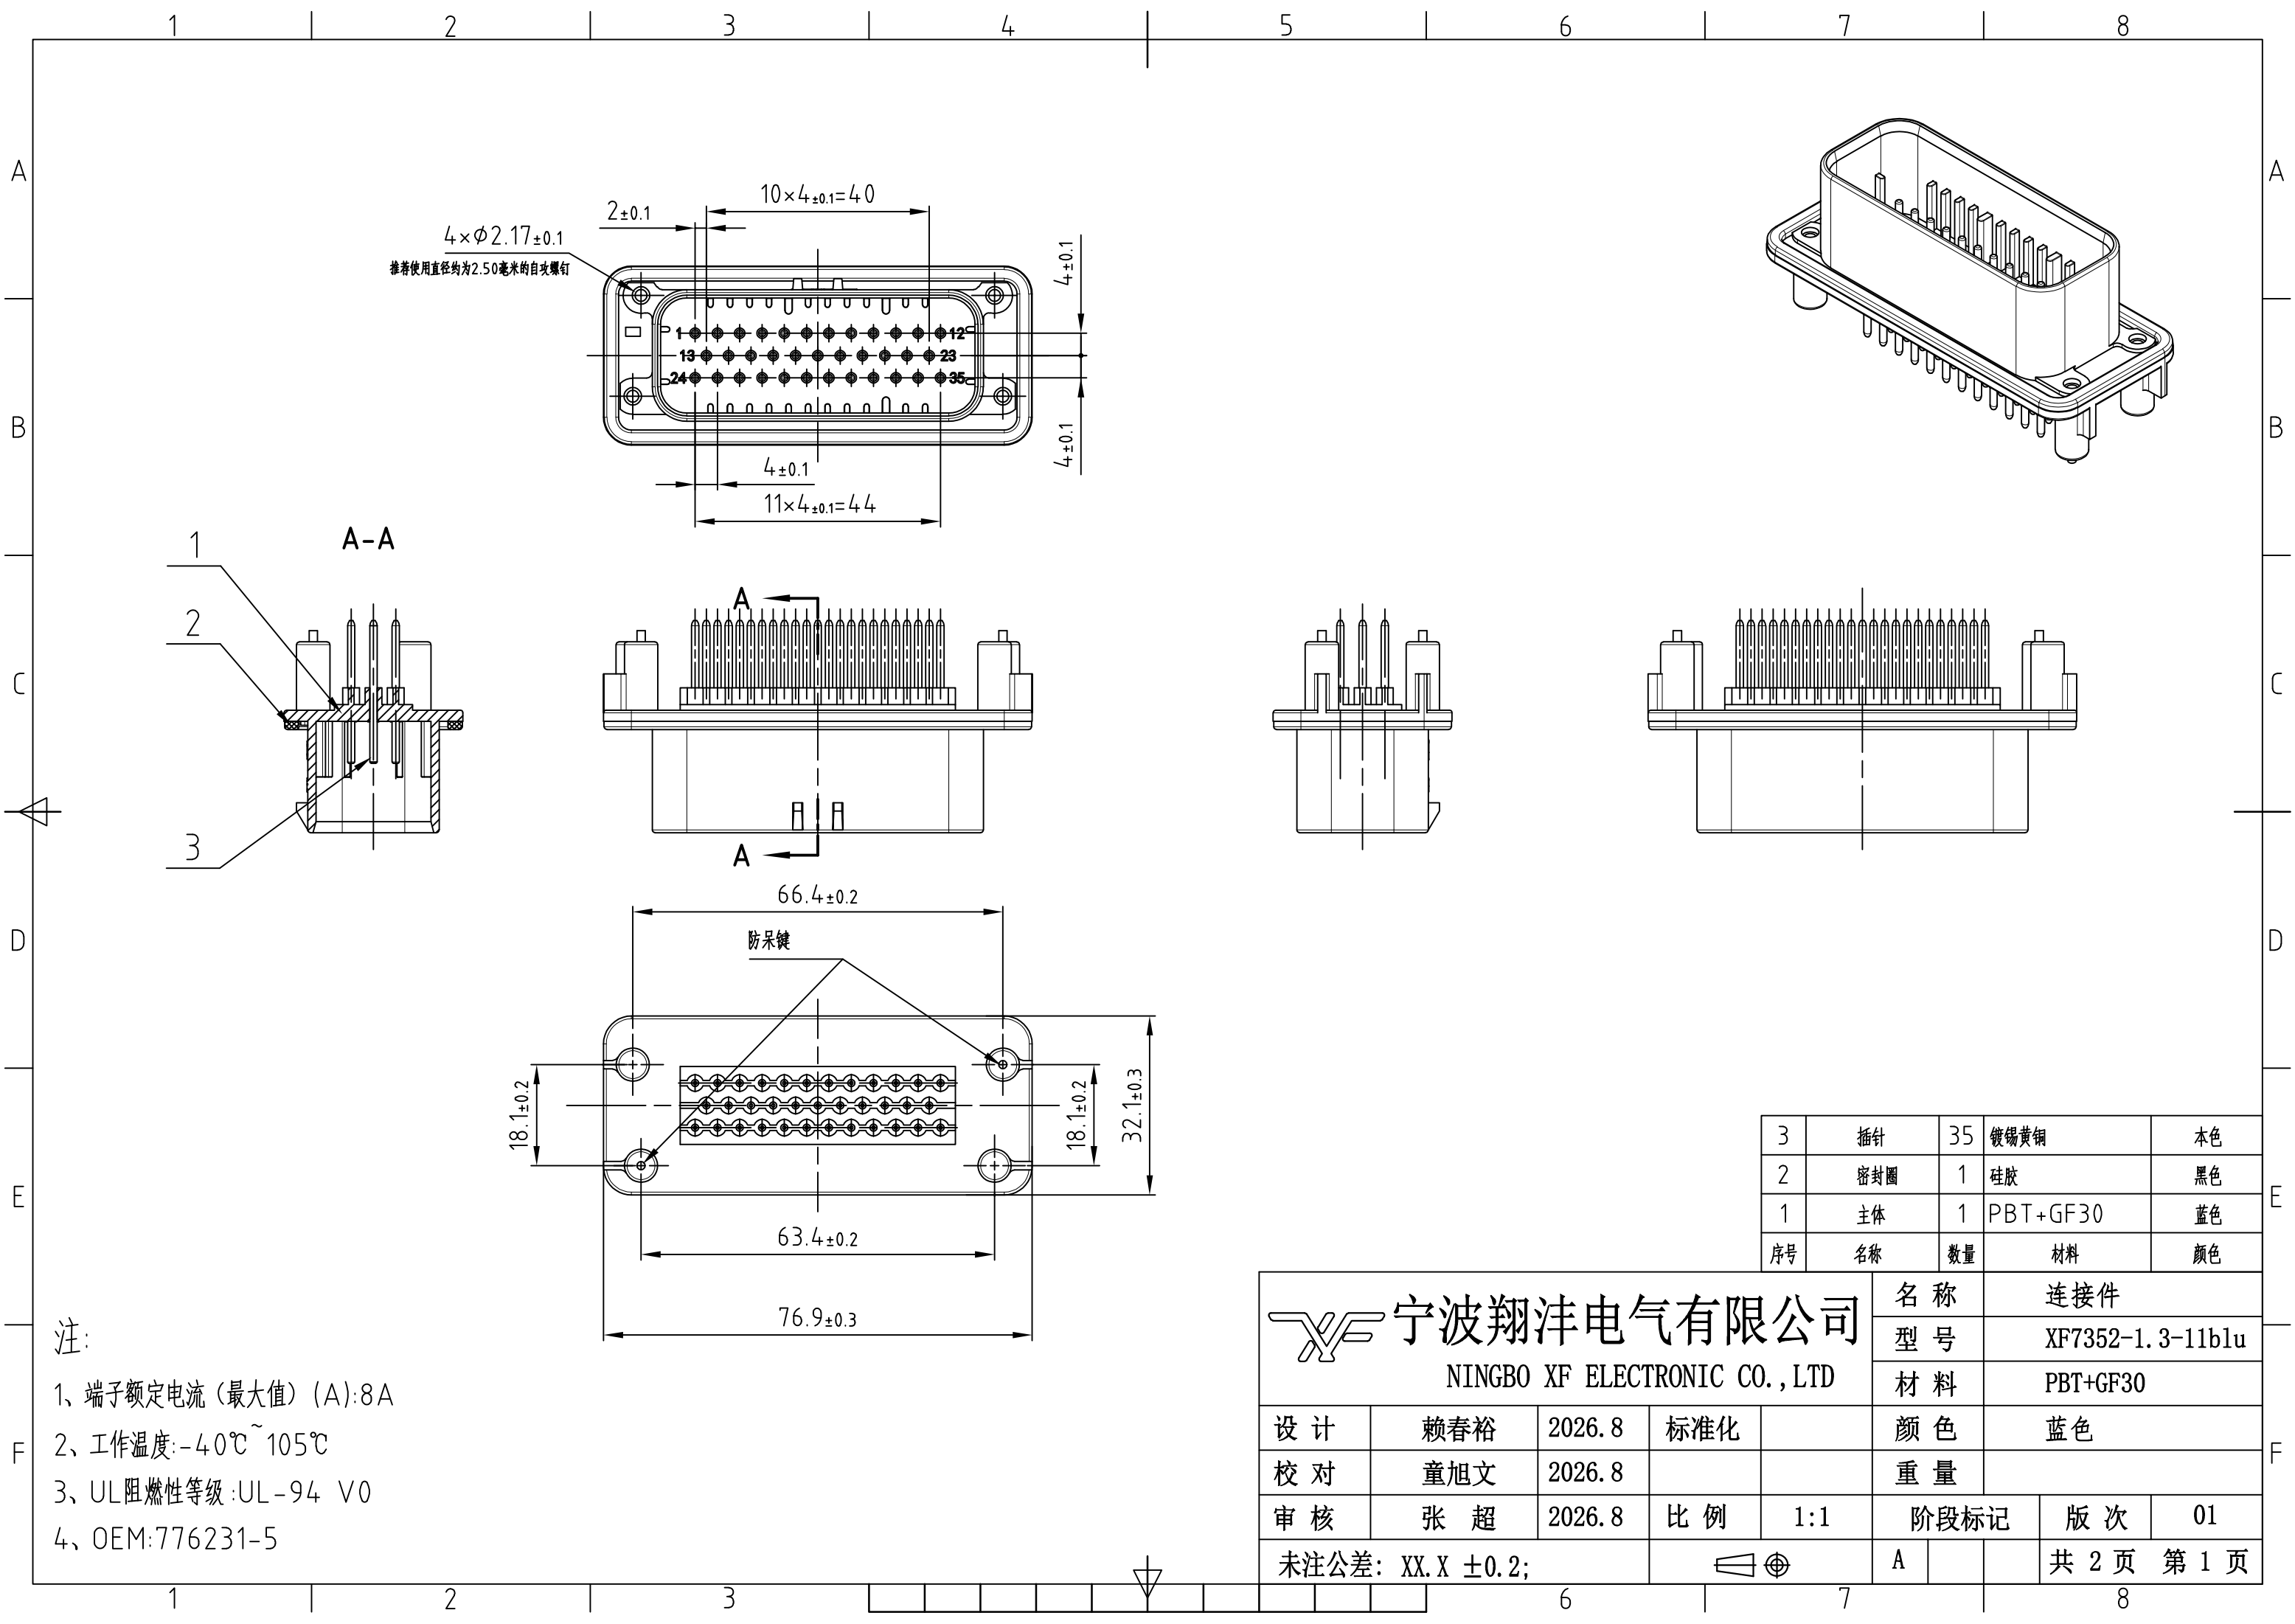

注:

1、端子额定电流(最大值)(A):8A

2、工作温度:-40℃~105℃

3、UL阻燃性等级:UL-94 V0


4、OEM:776231-5

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名 称	连接件			
					型 号	XF7352-1.3-11blu			
					材 料	PBT+GF30			
设 计	赖春裕	2026.8	标准化		颜 色	蓝色			
校 对	童旭文	2026.8			重 量				
审 核	张 超	2026.8	比 例	1:1	阶段标记		版 次	01	
未注公差：XX.X ±0.2；					A			共 2 页 第 1 页	


推荐的安装孔布局 (适用于最大厚度为5.0的面板)

B-B


最大5mm

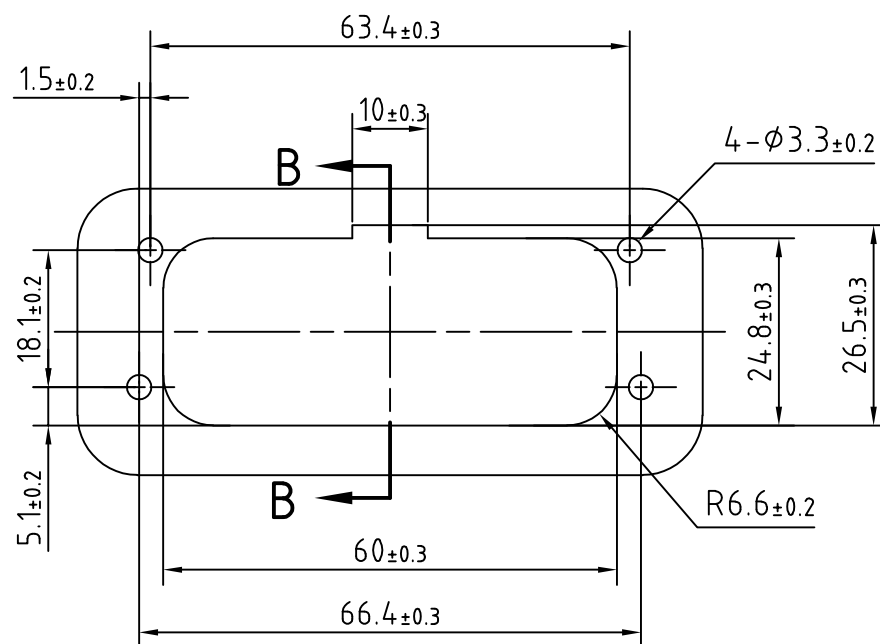


防错键位置

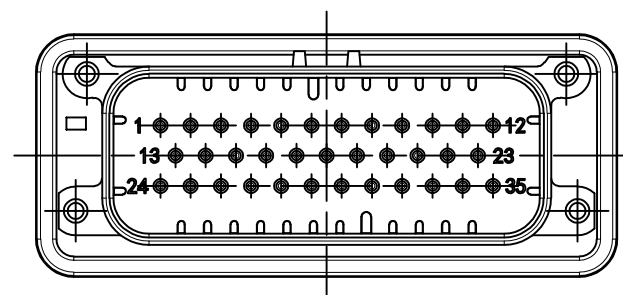


XF7352-1.3-11Bk & XF7351-1.3-11Bk

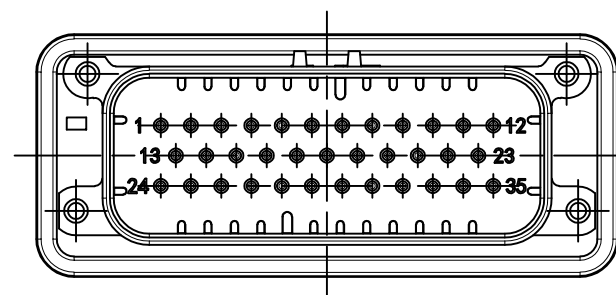

XF7352-1.3-11Wt & XF7351-1.3-11Wt

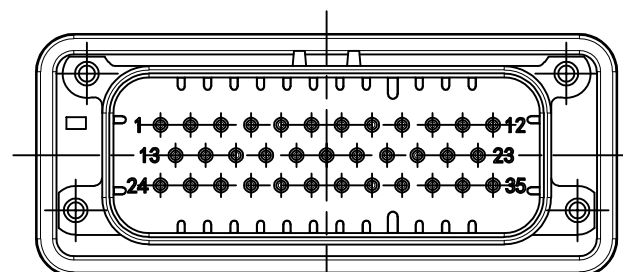

XF7352-1.3-11Gr & XF7351-1.3-11Gr

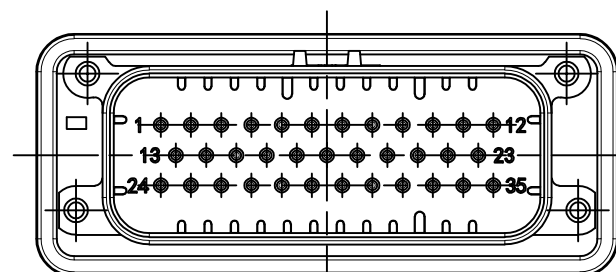


XF7352-1.3-11Blu & XF7351-1.3-11Blu

AMPSEAL接头

安装面板或模块


安装螺丝(4个)扭矩范围为0.6N·M至0.8N·M

防呆键

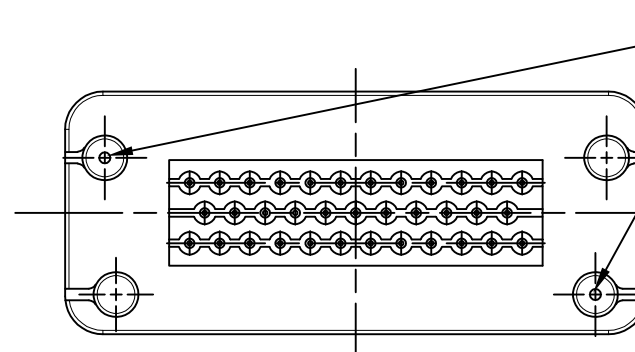

XF7352-1.3-11Bk & XF7351-1.3-11Bk
XF7352-1.3-11Gr & XF7351-1.3-11Gr

防呆键

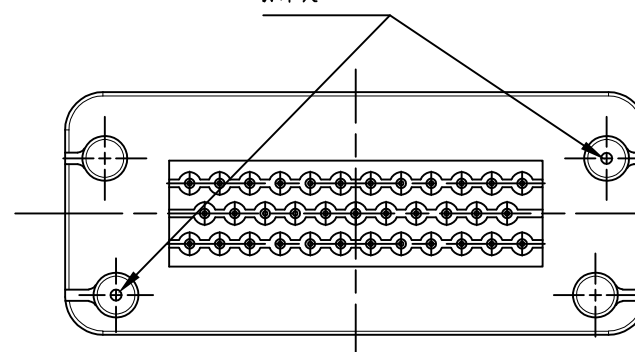

XF7352-1.3-11Wt & XF7351-1.3-11Wt
XF7352-1.3-11Blu & XF7351-1.3-11Blu

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

设 计	赖春裕	2026. 8	标准化		颜 色	蓝色		
校 对	童旭文	2026. 8			重 量			
审 核	张 超	2026. 8	比 例	1:1	阶段标记		版 次	01
未注公差: XX.X ±0. 2;					A			共 2 页 第 2 页