


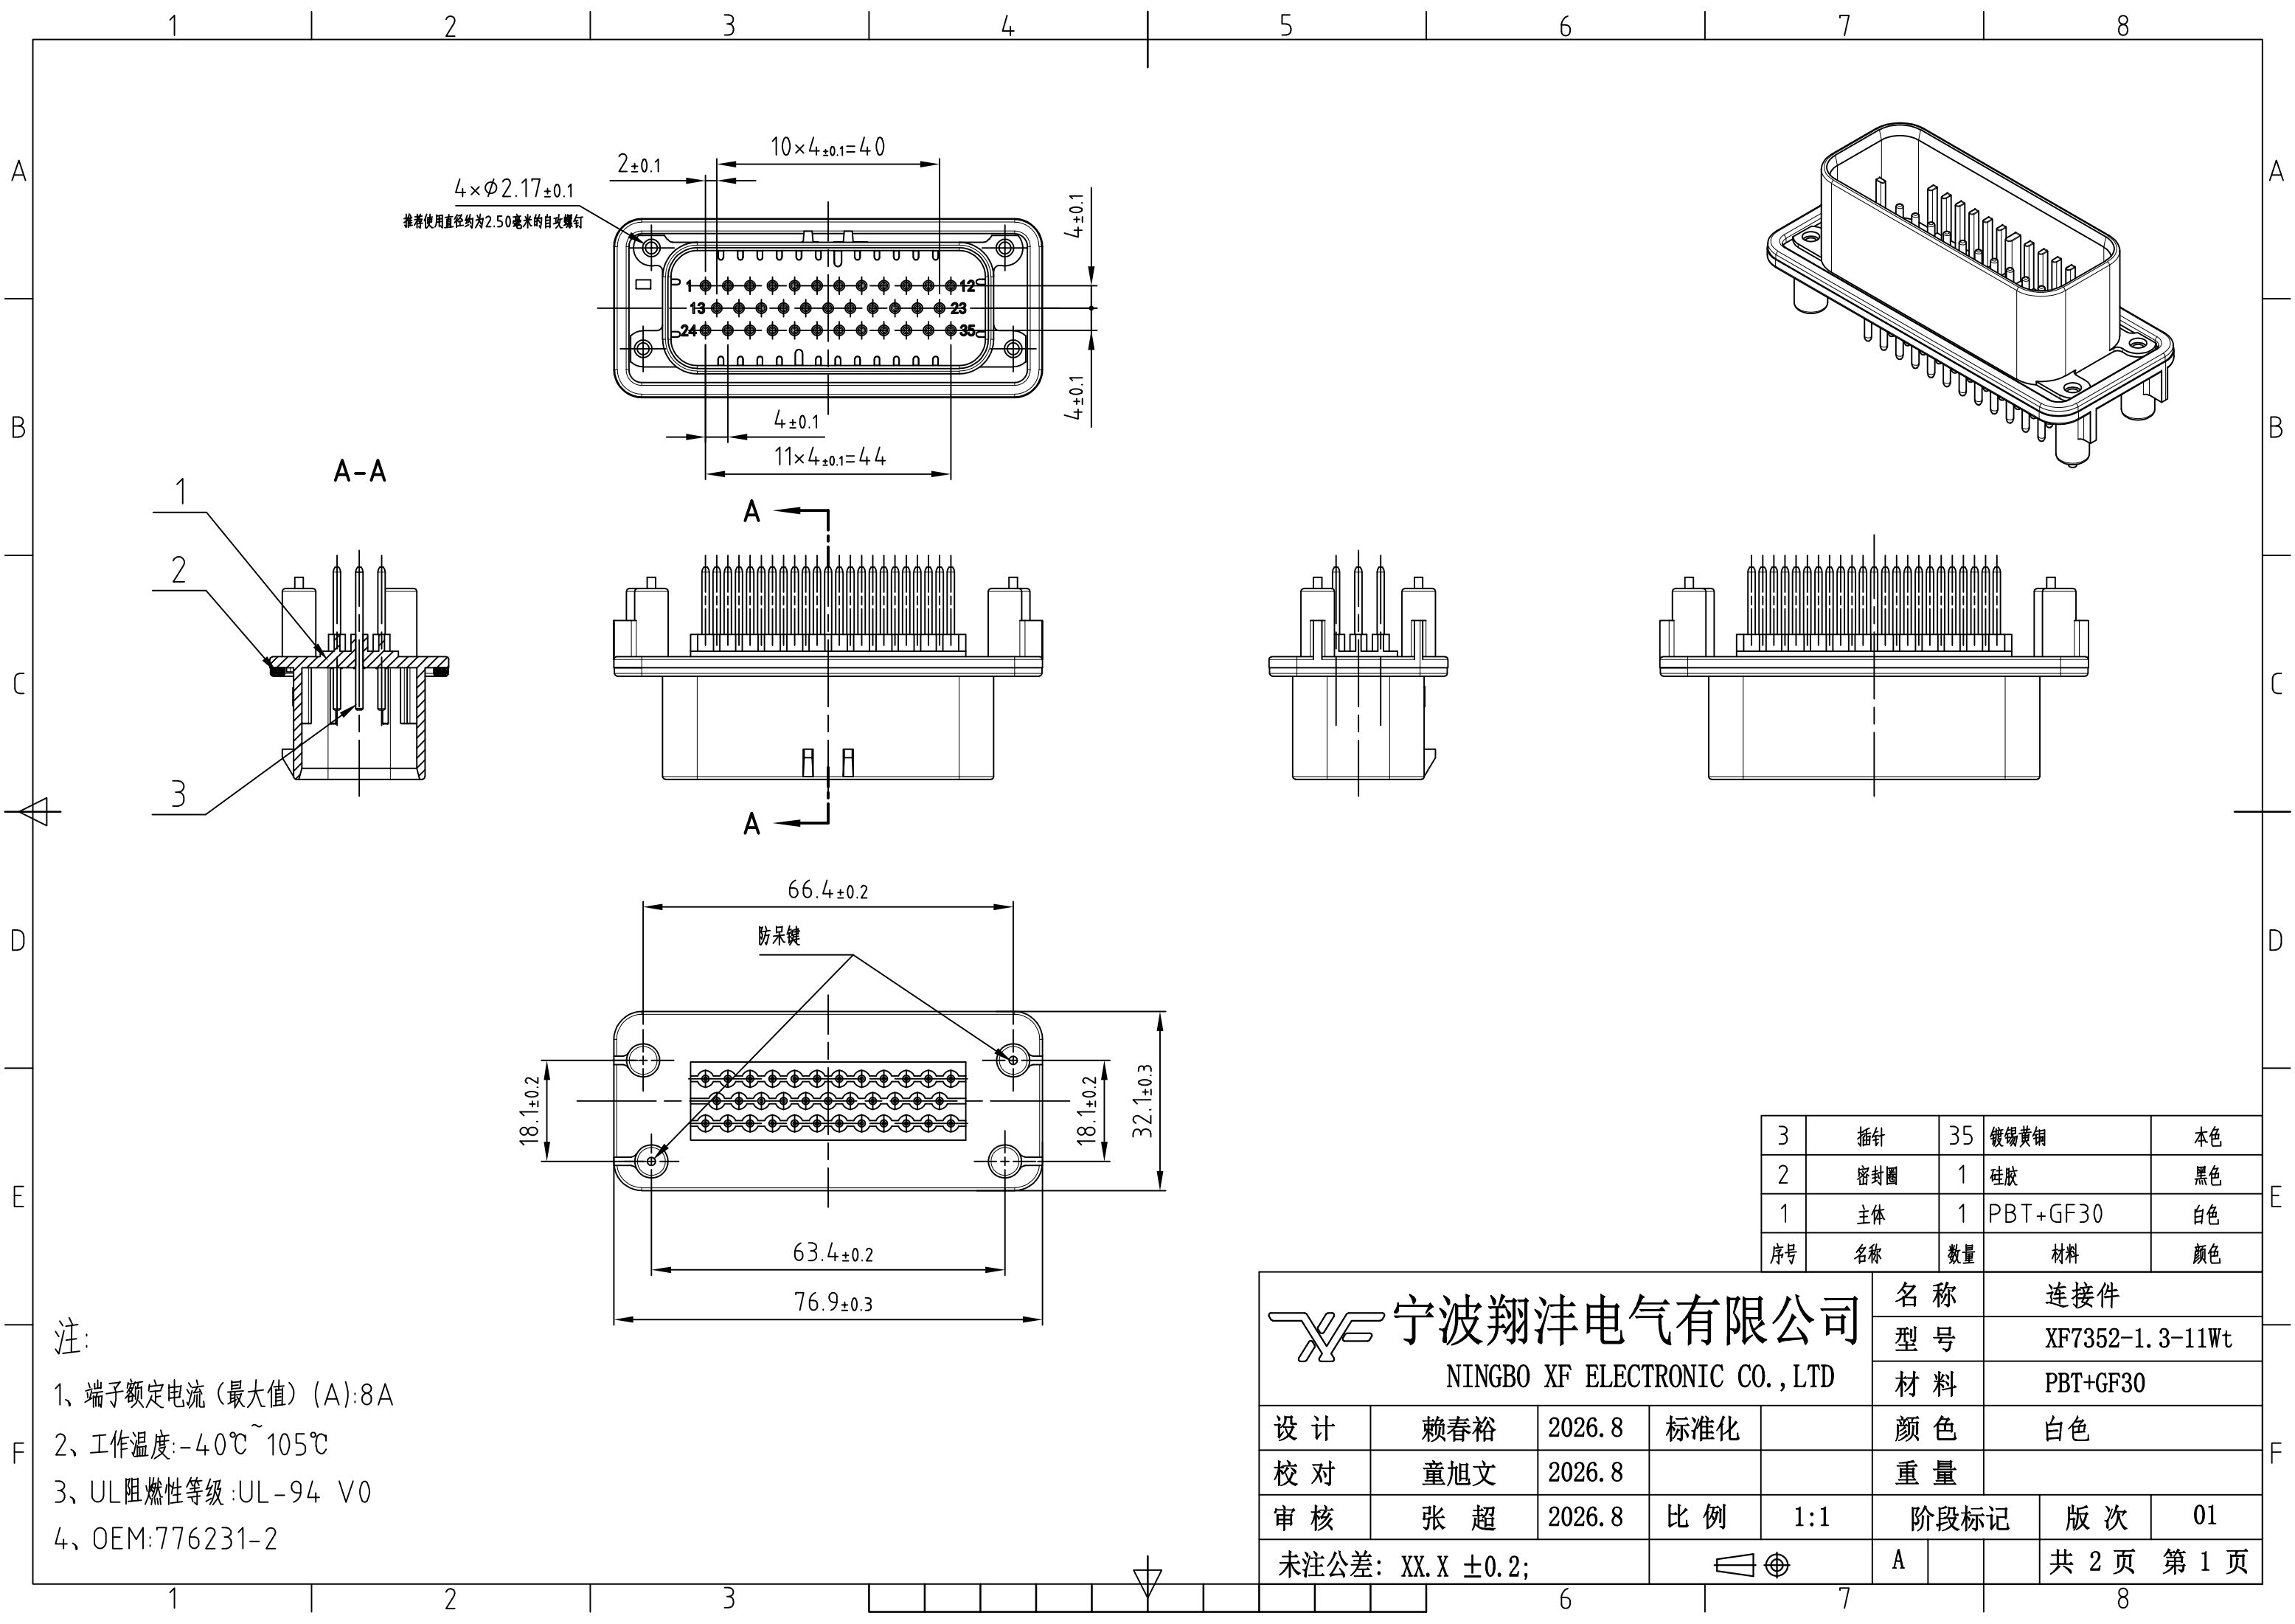

注:

- 端子额定电流 (最大值) (A): 8A
- 工作温度:  $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
- UL 阻燃性等级: UL-94 V0
- OEM: 776231-2


|    |     |    |          |    |
|----|-----|----|----------|----|
| 3  | 插针  | 35 | 镀锡黄铜     | 本色 |
| 2  | 密封圈 | 1  | 硅胶       | 黑色 |
| 1  | 主体  | 1  | PBT+GF30 | 白色 |
| 序号 | 名称  | 数量 | 材料       | 颜色 |

|                                                                                                                                   |     |        |     |                                                                                       |      |                 |       |       |
|-----------------------------------------------------------------------------------------------------------------------------------|-----|--------|-----|---------------------------------------------------------------------------------------|------|-----------------|-------|-------|
|  宁波翔沣电气有限公司<br>NINGBO XF ELECTRONIC CO., LTD |     |        |     |                                                                                       | 名称   | 连接件             |       |       |
|                                                                                                                                   |     |        |     |                                                                                       | 型号   | XF7352-1.3-11Wt |       |       |
|                                                                                                                                   |     |        |     |                                                                                       | 材料   | PBT+GF30        |       |       |
| 设计                                                                                                                                | 赖春裕 | 2026.8 | 标准化 |                                                                                       | 颜色   | 白色              |       |       |
| 校对                                                                                                                                | 童旭文 | 2026.8 |     |                                                                                       | 重量   |                 |       |       |
| 审核                                                                                                                                | 张超  | 2026.8 | 比例  | 1:1                                                                                   | 阶段标记 |                 | 版次    | 01    |
| 未注公差: XX.X $\pm 0.2$ ;                                                                                                            |     |        |     |  | A    |                 | 共 2 页 | 第 1 页 |


推荐的安装孔布局 (适用于最大厚度为5.0的面板)

B-B


最大5mm

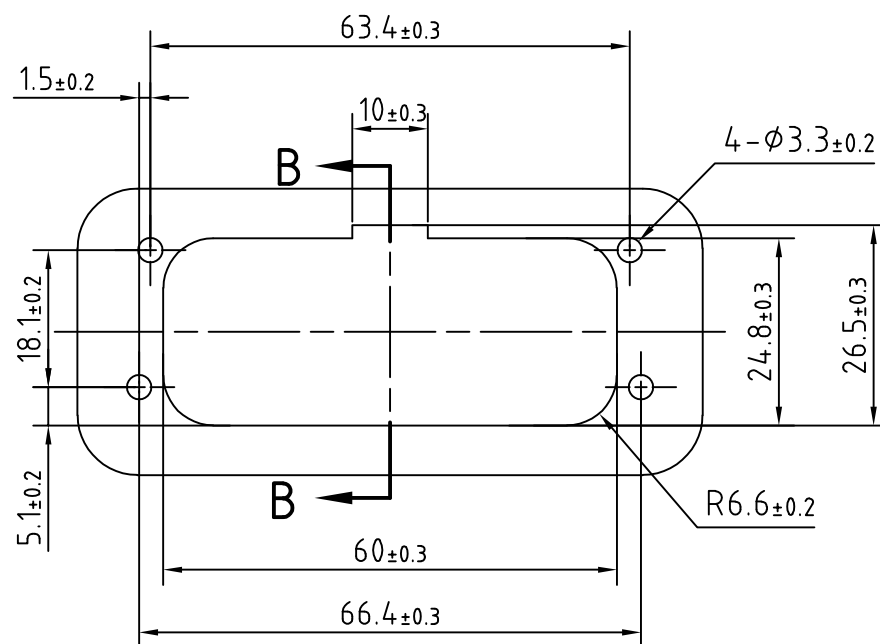


防错键位置

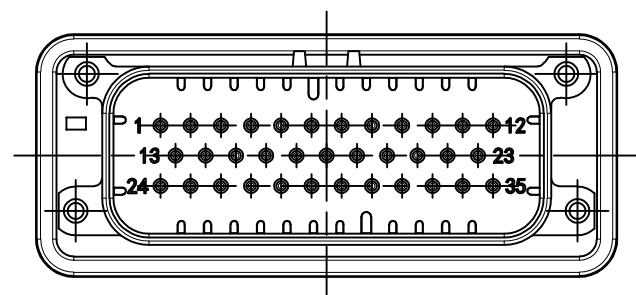


XF7352-1.3-11Bk & XF7351-1.3-11Bk

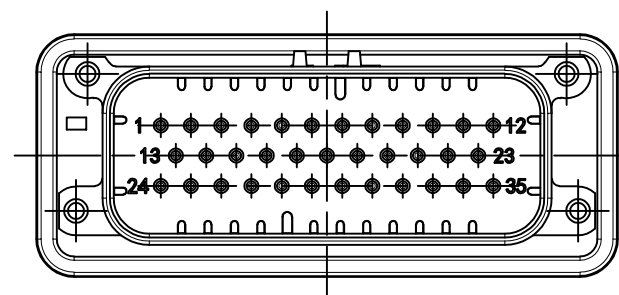

XF7352-1.3-11Wt & XF7351-1.3-11Wt

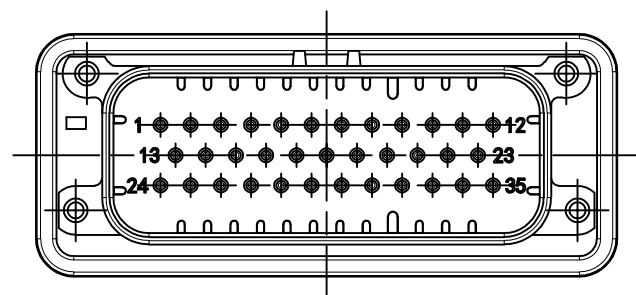

XF7352-1.3-11Gr & XF7351-1.3-11Gr

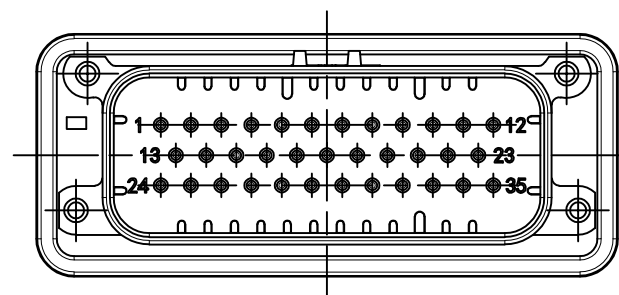


XF7352-1.3-11Blu & XF7351-1.3-11Blu

AMPSEAL接头

安装面板或模块


安装螺丝(4个)扭矩范围为0.6N·M至0.8N·M

防呆键

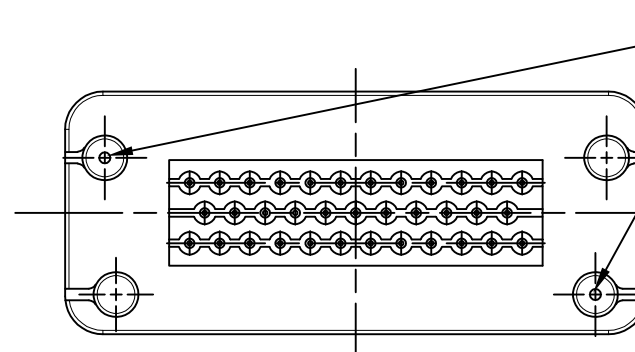

XF7352-1.3-11Bk & XF7351-1.3-11Bk  
XF7352-1.3-11Gr & XF7351-1.3-11Gr

防呆键

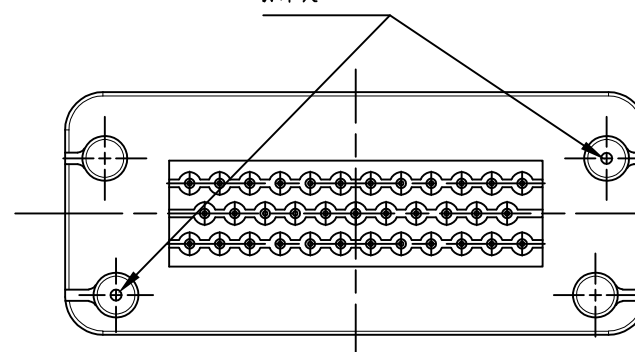

XF7352-1.3-11Wt & XF7351-1.3-11Wt  
XF7352-1.3-11Blu & XF7351-1.3-11Blu

 宁波翔沣电气有限公司  
NINGBO XF ELECTRONIC CO., LTD

|                   |     |         |                                                                                       |     |      |    |     |             |
|-------------------|-----|---------|---------------------------------------------------------------------------------------|-----|------|----|-----|-------------|
| 设 计               | 赖春裕 | 2026. 8 | 标准化                                                                                   |     | 颜 色  | 白色 |     |             |
| 校 对               | 童旭文 | 2026. 8 |                                                                                       |     | 重 量  |    |     |             |
| 审 核               | 张 超 | 2026. 8 | 比 例                                                                                   | 1:1 | 阶段标记 |    | 版 次 | 01          |
| 未注公差: XX.X ±0. 2; |     |         |  |     | A    |    |     | 共 2 页 第 2 页 |