
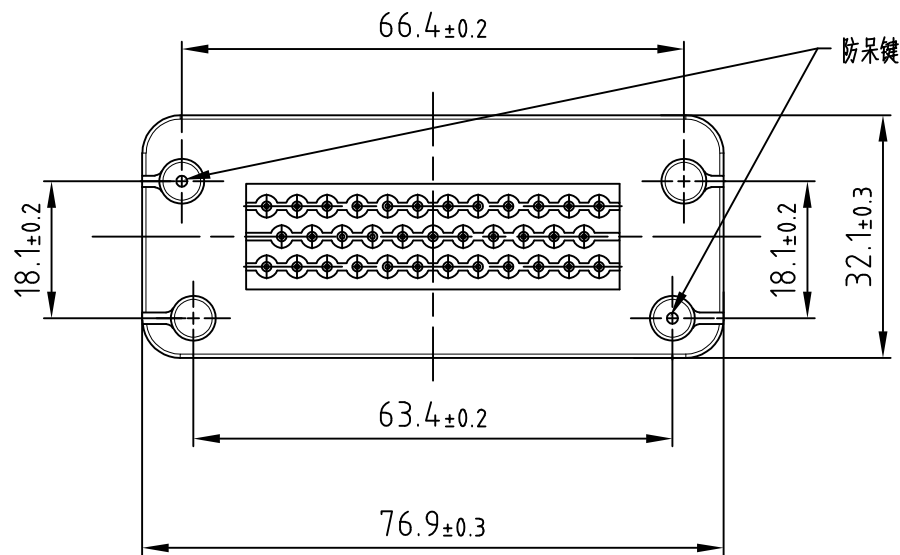
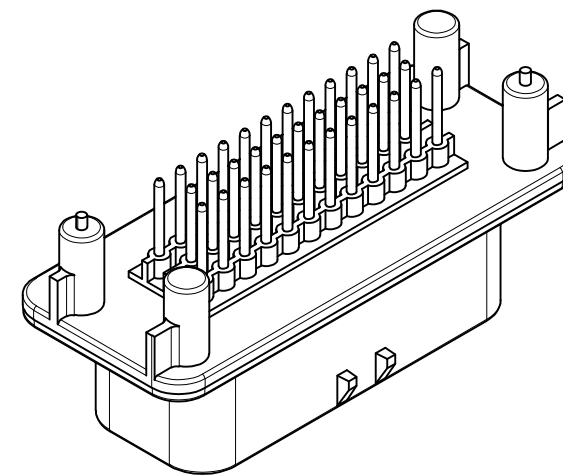
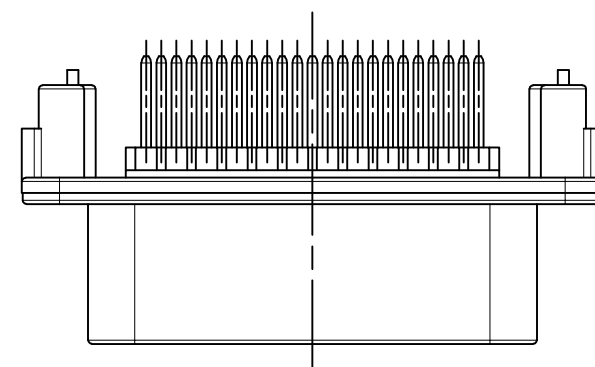

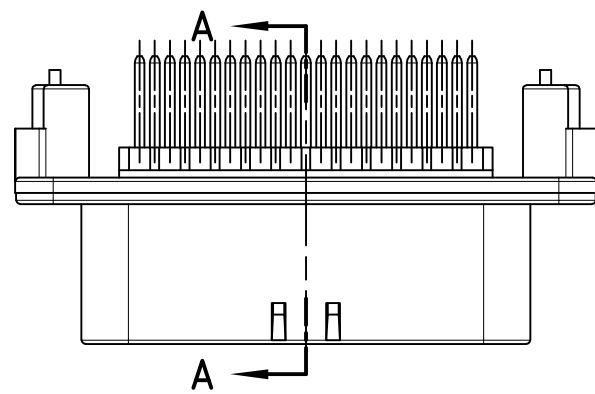
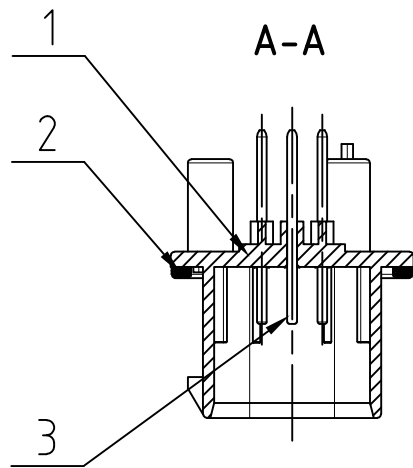


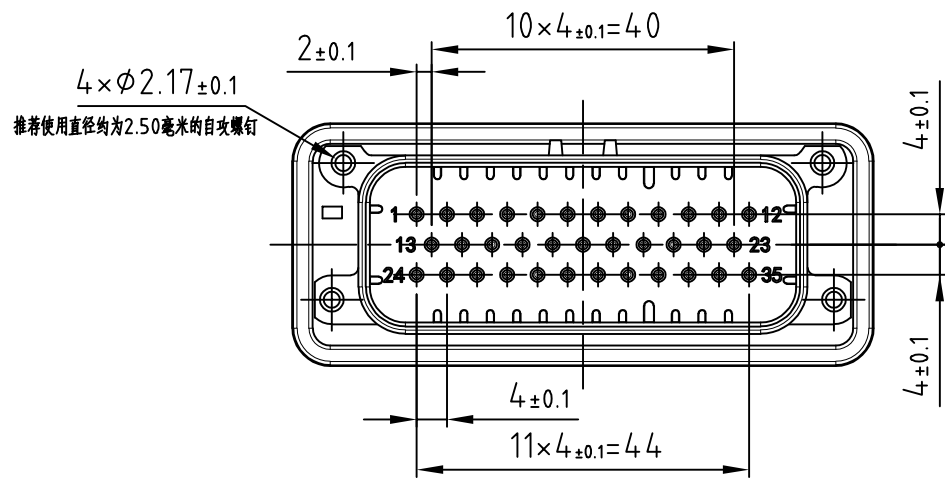

- 注:
- 端子额定电流 (最大值) (A): 17A
 - 工作温度: -40℃ ~ 125℃
 - UL 阻燃性等级: UL-94 V0
 - OEM: 1-776231-4

3	插针	35	镀金黄铜	本色
2	密封圈	1	硅胶	黑色
1	主体	1	PBT+GF30	灰色
序号	名称	数量	材料	颜色


 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

设计	赖春裕	2026.8	标准化		名称	连接件		
校对	童旭文	2026.8			型号	XF7351-1.3-11Gr		
审核	张超	2026.8	比例	1:1	材料	PBT+GF30		
未注公差: XX.X ±0.2;					颜色	灰色		
					重量			
					阶段标记	版次	01	
					A	共 2 页	第 1 页	


推荐的安装孔布局 (适用于最大厚度为5.0的面板)

B-B


最大5mm

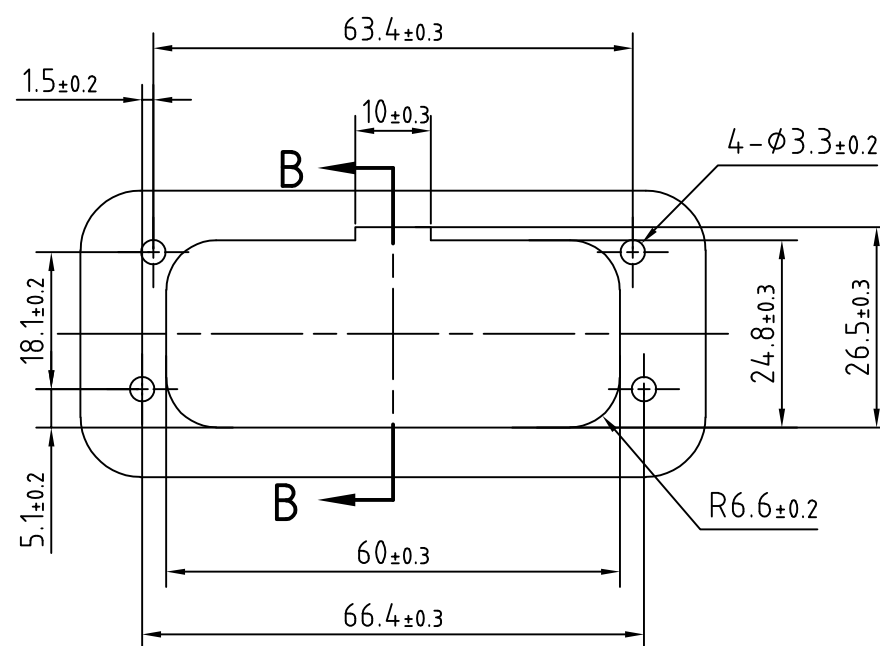


防错键位置

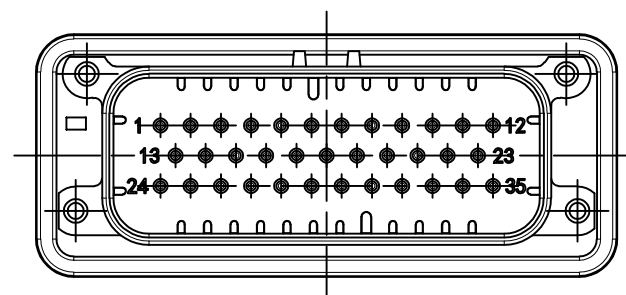


XF7352-1.3-11Bk & XF7351-1.3-11Bk

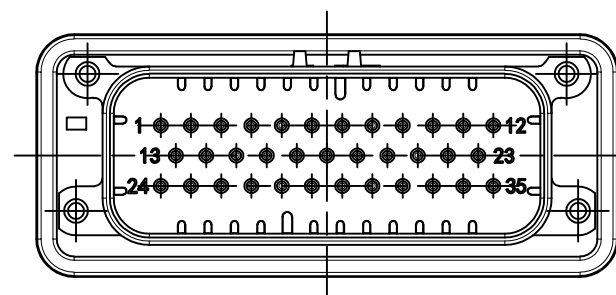

XF7352-1.3-11Wt & XF7351-1.3-11Wt

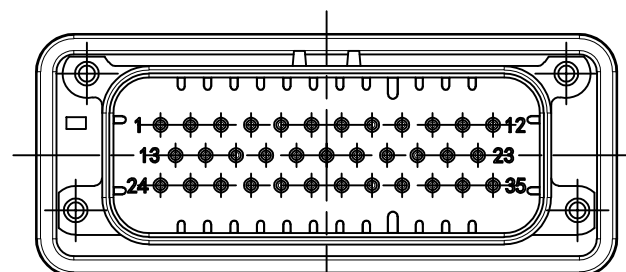

XF7352-1.3-11Gr & XF7351-1.3-11Gr

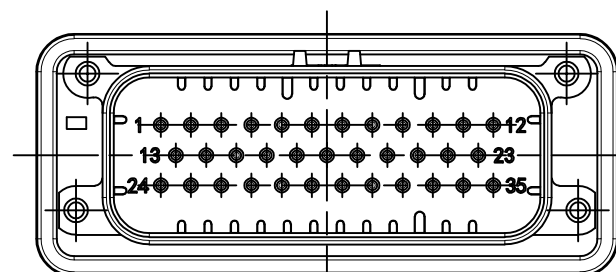


XF7352-1.3-11Blu & XF7351-1.3-11Blu

AMPSEAL接头

安装面板或模块


安装螺丝(4个)扭矩范围为0.6N·M至0.8N·M

防呆键

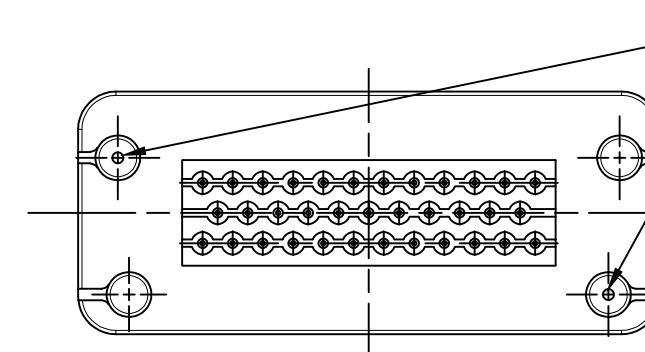


XF7352-1.3-11Bk & XF7351-1.3-11Bk
XF7352-1.3-11Gr & XF7351-1.3-11Gr

防呆键

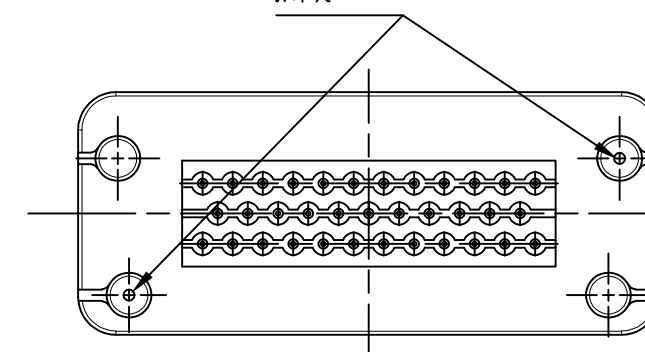

XF7352-1.3-11Wt & XF7351-1.3-11Wt
XF7352-1.3-11Blu & XF7351-1.3-11Blu

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

设 计	赖春裕	2026.8	标准化		颜 色		灰色	
校 对	童旭文	2026.8			重 量			
审 核	张 超	2026.8	比 例	1:1	阶段标记		版 次	01
未注公差: XX.X ±0.2;					A			共 2 页 第 2 页