


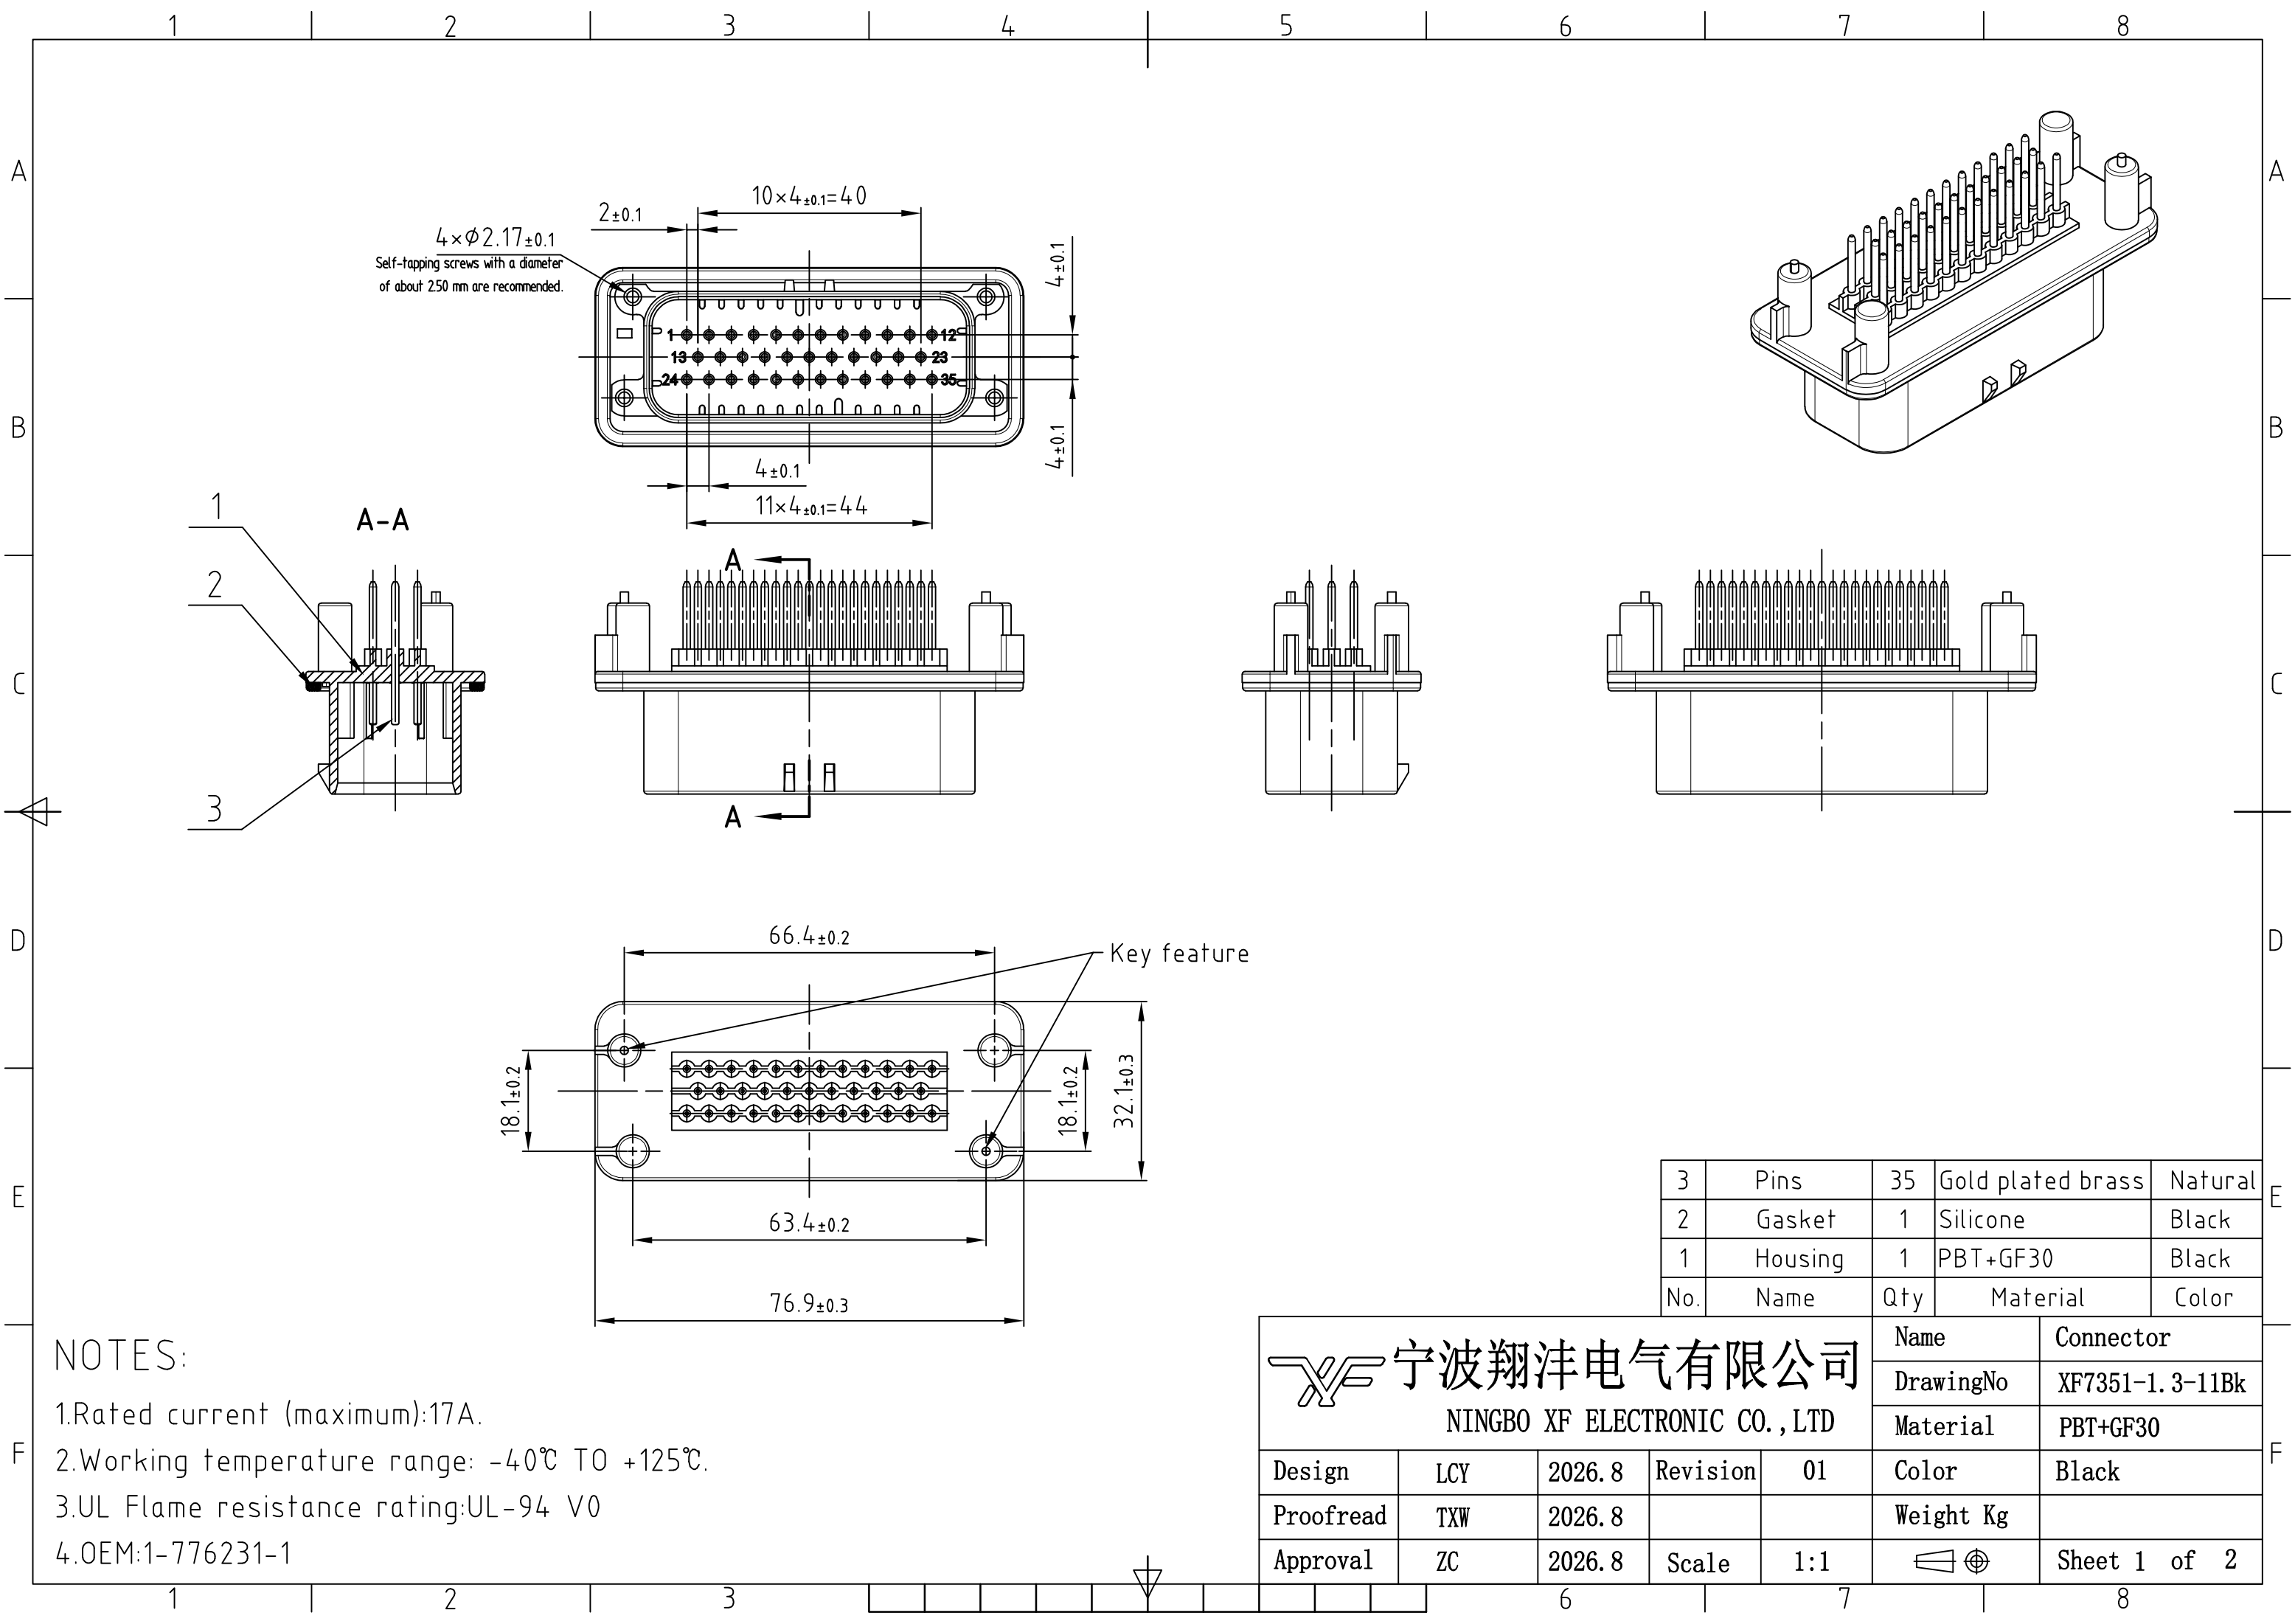

NOTES:


- 1.Rated current (maximum):17A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.UL Flame resistance rating:UL-94 V0
- 4.OEM:1-776231-1

3	Pins	35	Gold plated brass	Natural
2	Gasket	1	Silicone	Black
1	Housing	1	PBT+GF30	Black
No.	Name	Qty	Material	Color


XF 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector
					DrawingNo	XF7351-1.3-11Bk
					Material	PBT+GF30
Design	LCY	2026.8	Revision	01	Color	Black
Proofread	TXW	2026.8			Weight Kg	
Approval	ZC	2026.8	Scale	1:1		Sheet 1 of 2

Recommended mounting hole layout
for 5.0 max thick panel


B-B
最大5mm

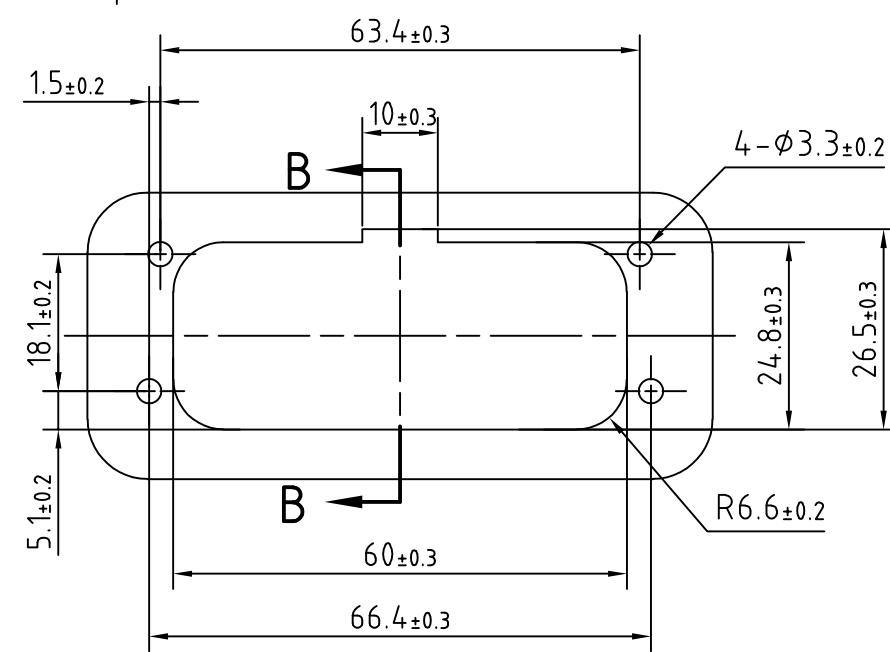


Key location

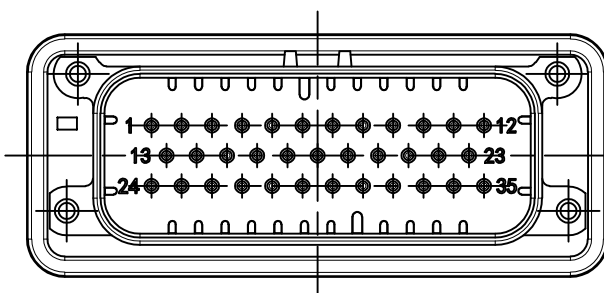


XF7352-1.3-11Bk & XF7351-1.3-11Bk

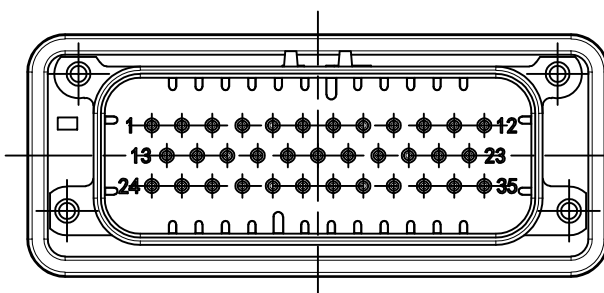

XF7352-1.3-11Wt & XF7351-1.3-11Wt

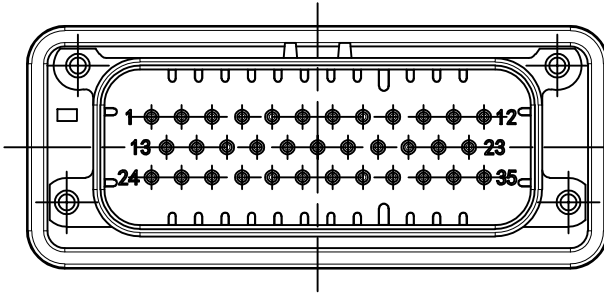

XF7352-1.3-11Gr & XF7351-1.3-11Gr

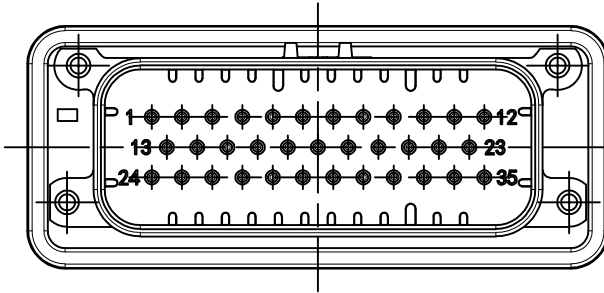


XF7352-1.3-11Blu & XF7351-1.3-11Blu

Ampseal header

Mounting panel
or module


Mounting screw (4)
torque to 0.6N·M TO 0.8N·M

Key feature

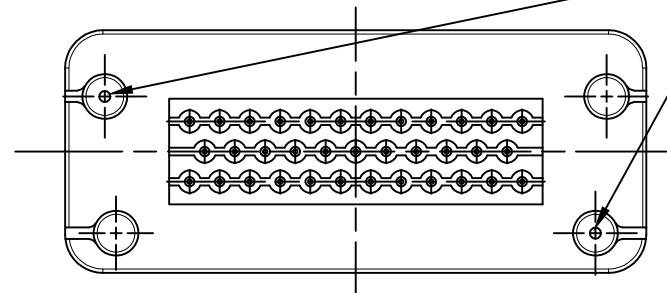

XF7352-1.3-11Bk & XF7351-1.3-11Bk
XF7352-1.3-11Gr & XF7351-1.3-11Gr

Key feature

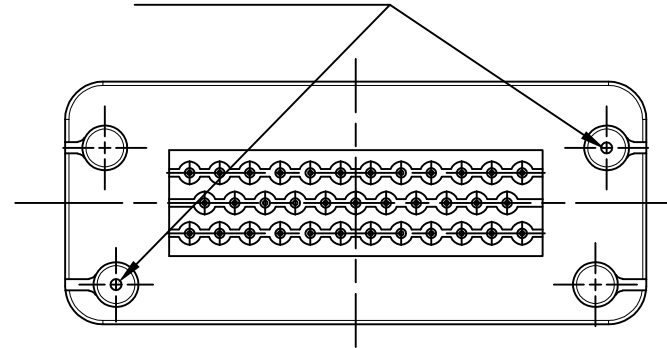

XF7352-1.3-11Wt & XF7351-1.3-11Wt
XF7352-1.3-11Blu & XF7351-1.3-11Blu

宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

Design	LCY	2026.8	Revision	01
Proofread	TXW	2026.8		
Approval	ZC	2026.8	Scale	1:1

Name	Connector
DrawingNo	XF7351-1.3-11Bk
Material	PBT+GF30
Color	Black
Weight Kg	
	Sheet 2 of 2