
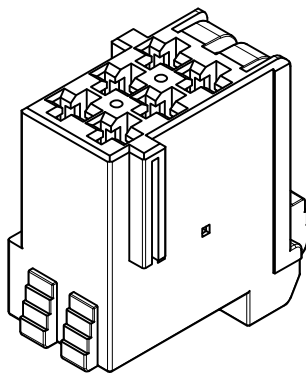
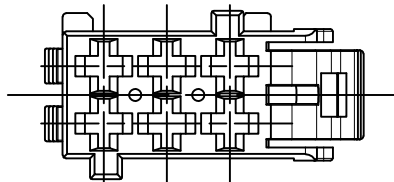

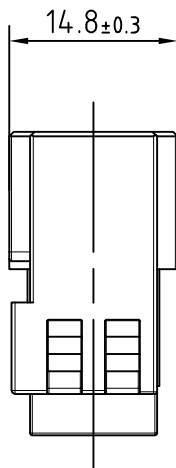
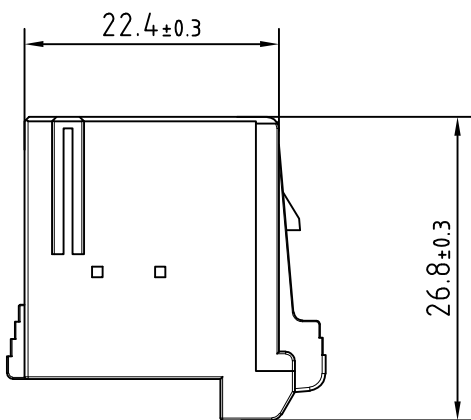
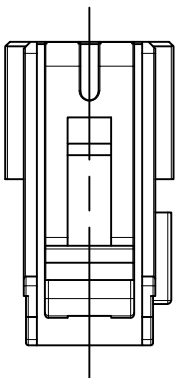


A
B
C
D
E
F

修 订 记 录				
记 号	描 述	日 期	设 计	审 核

A
B
C
D
E
F

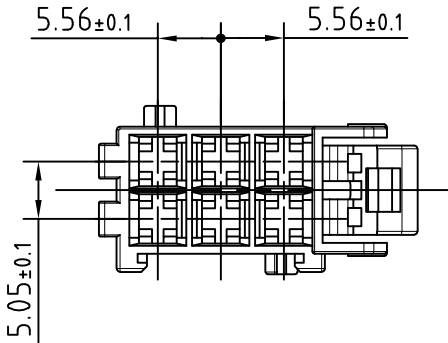

- 注:
- 1、工作温度: $-40^{\circ}\text{C}\sim 125^{\circ}\text{C}$
 - 2、UL阻燃性等级:UL-94 HB
 - 3、电气特征: 标称电压架构(V):12

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名 称	连接件			
					型 号	XF7061-2.8-21Gr			
					材 料	PA66+GF13			
设 计	赖春裕	2026.8	标准化		颜 色	灰色			
校 对	童旭文	2026.8			重 量				
审 核	张 超	2026.8	比 例	1.5:1	阶段标记		版 次	01	
未注公差：XX.X ±0.2；					A			共 1 页	第 1 页