
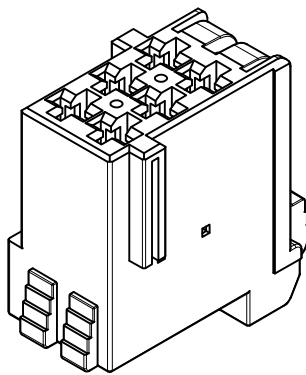
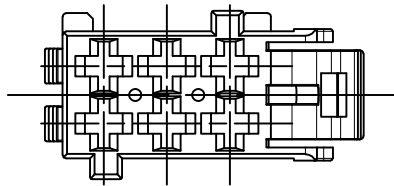

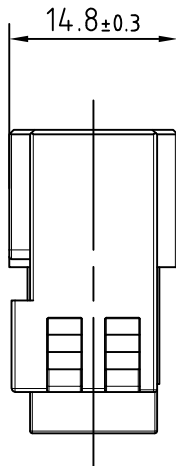
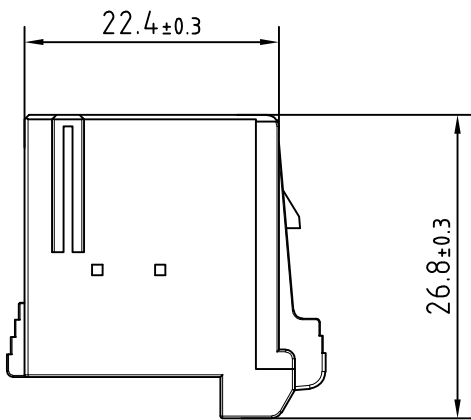
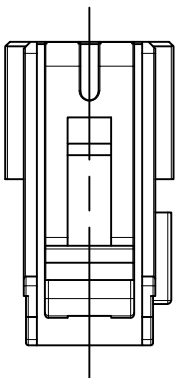


A
B
C
D
E
F

修 订 记 录				
记 号	描 述	日 期	设 计	审 核

A
B
C
D
E
F

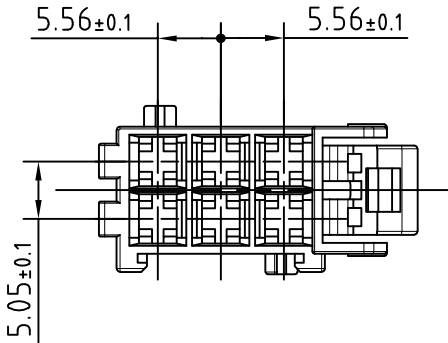

注:

- 1、工作温度: -40℃~125℃
2、UL阻燃性等级:UL-94 HB
3、电气特征: 标称电压架构(V):12

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名 称	连接件		
					型 号	XF7061-2.8-21Pur		
					材 料	PA66+GF13		
设 计	赖春裕	2026.8	标准化		颜 色	紫色		
校 对	童旭文	2026.8			重 量			
审 核	张 超	2026.8	比 例	1.5:1	阶段标记	版 次	01	
未注公差: XX.X ±0.2;					A		共 1 页	第 1 页