


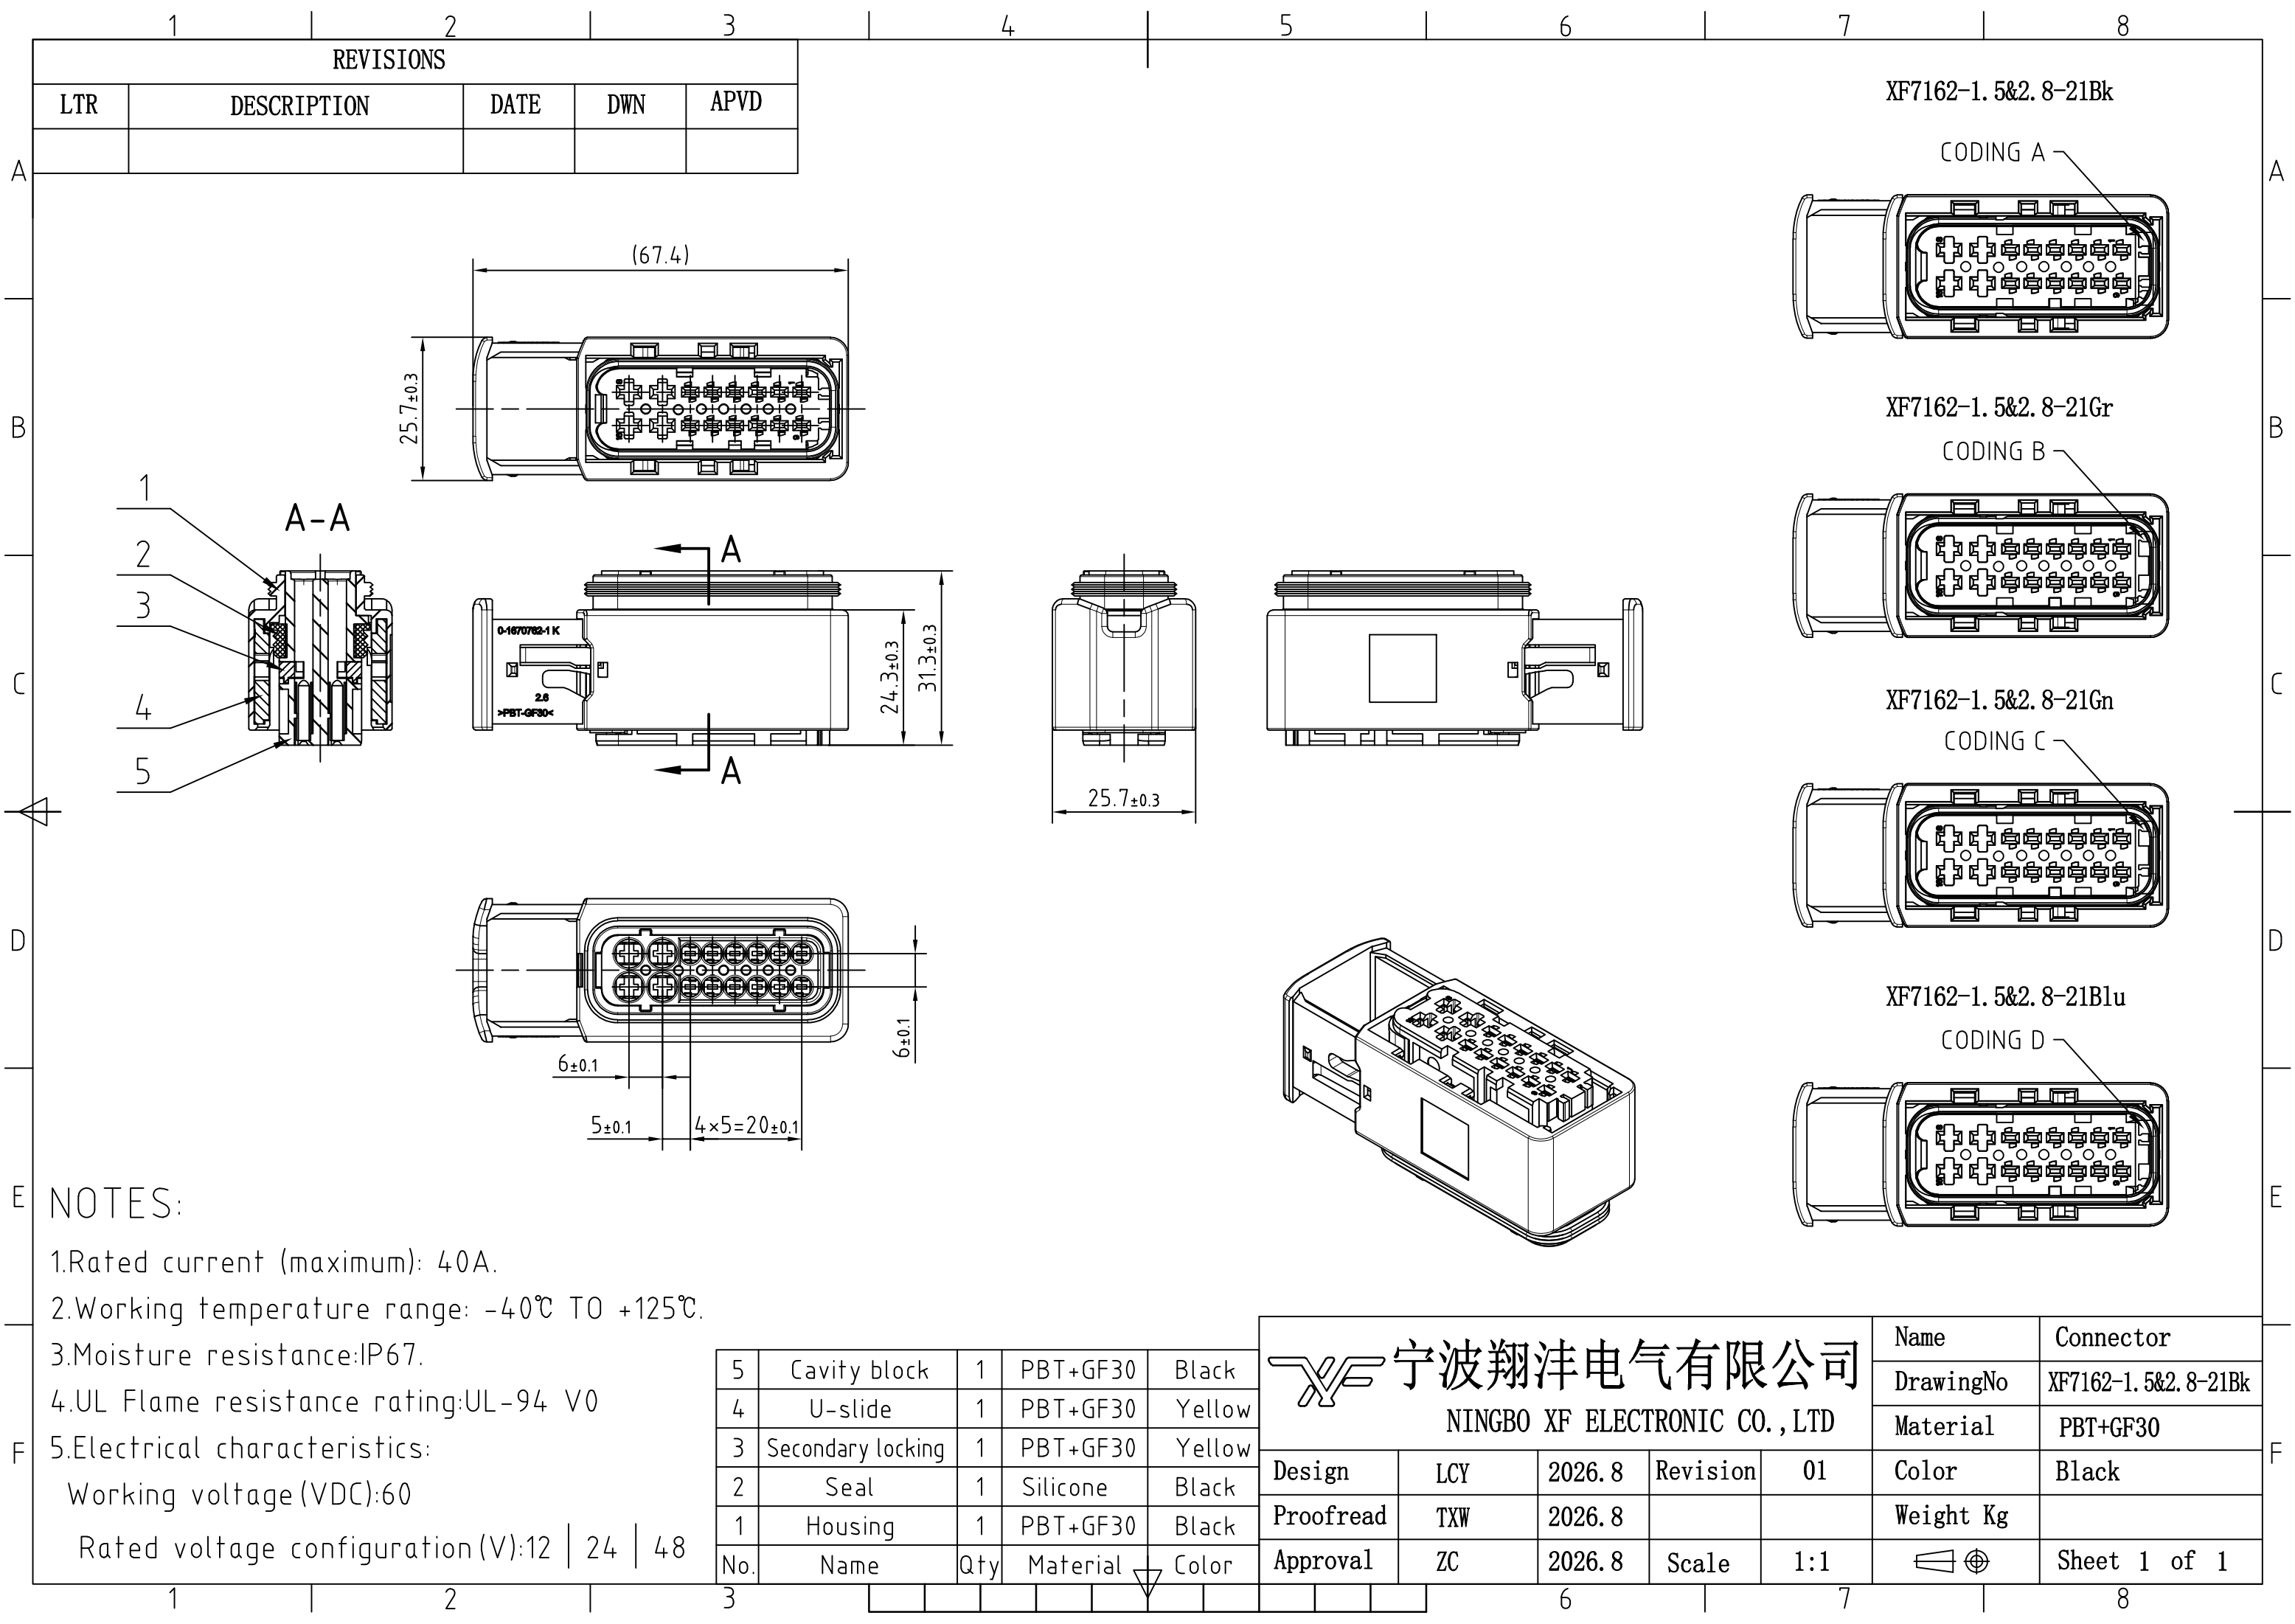

A
B
C
D
E
F

A
B
C
D
E
F

E
F

NOTES:

1.Rated current (maximum): 40A.

2.Working temperature range: -40℃ TO +125℃.

3.Moisture resistance:IP67.

4.UL Flame resistance rating:UL-94 V0

5.Electrical characteristics:

Working voltage(VDC):60

Rated voltage configuration(V):12 | 24 | 48

5	Cavity block	1	PBT+GF30	Black
4	U-slide	1	PBT+GF30	Yellow
3	Secondary locking	1	PBT+GF30	Yellow
2	Seal	1	Silicone	Black
1	Housing	1	PBT+GF30	Black
No.	Name	Qty	Material	Color

XF 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector
					DrawingNo	XF7162-1.5&2.8-21Bk
					Material	PBT+GF30
Design	LCY	2026.8	Revision	01	Color	Black
Proofread	TXW	2026.8			Weight Kg	
Approval	ZC	2026.8	Scale	1:1		Sheet 1 of 1