



REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD

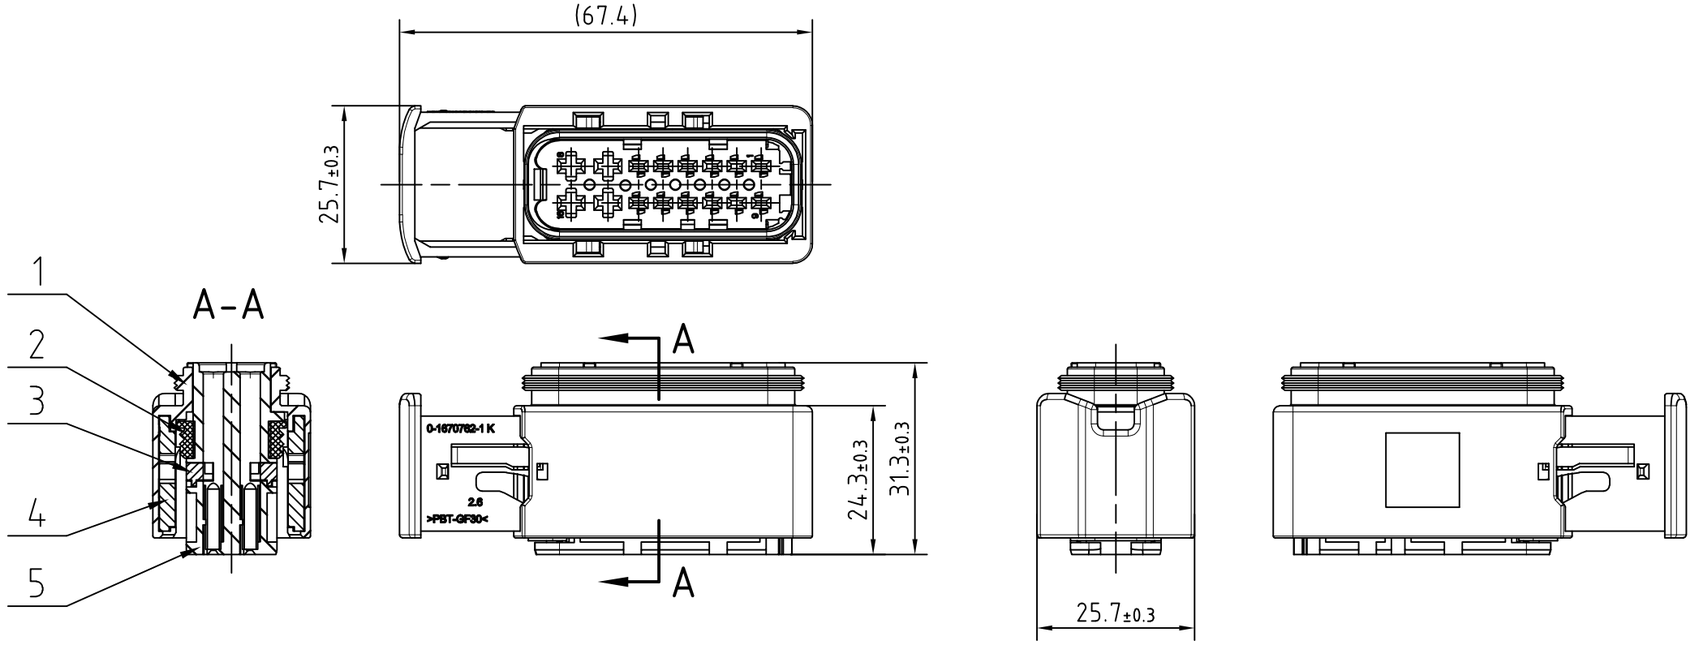

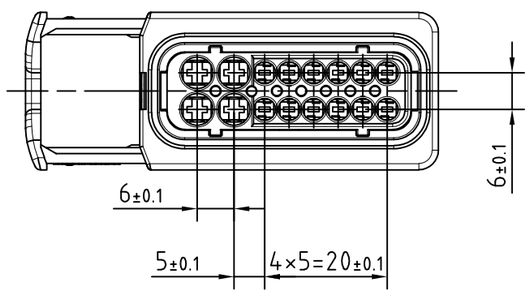


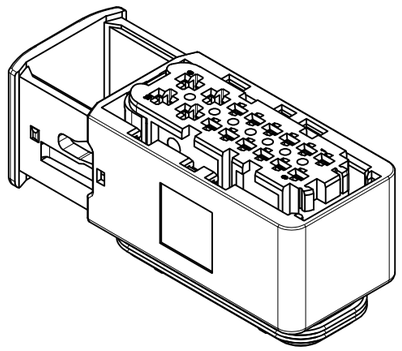


XF7162-1.5&2.8-21Bk

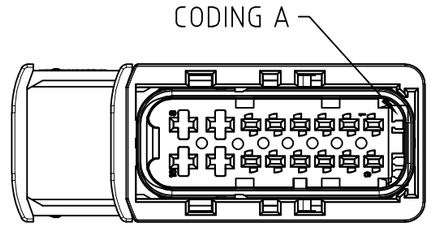


XF7162-1.5&2.8-21Gr

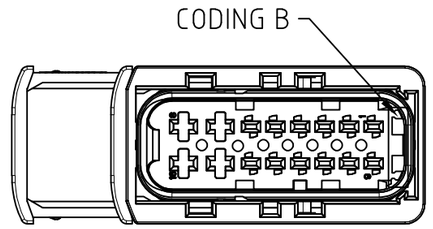

XF7162-1.5&2.8-21Gn

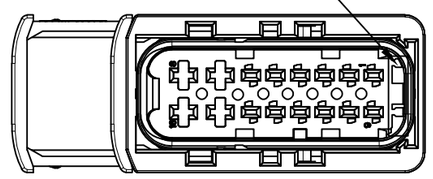

XF7162-1.5&2.8-21Blu

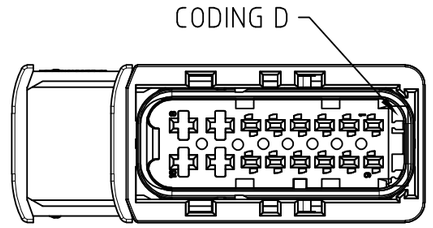

NOTES:

1.Rated current (maximum): 40A.

2.Working temperature range: -40℃ TO +125℃.

3.Moisture resistance:IP67.

4.UL Flame resistance rating:UL-94 V0

5.Electrical characteristics:

Working voltage(VDC):60

Rated voltage configuration(V):12 | 24 | 48

No.	Name	Qty	Material	Color
5	Cavity block	1	PBT+GF30	Blue
4	U-slide	1	PBT+GF30	Yellow
3	Secondary locking	1	PBT+GF30	Yellow
2	Seal	1	Silicone	Black
1	Housing	1	PBT+GF30	Black

宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

Design	LCY	2026.8	Revision	01	Name	Connector
Proofread	TXW	2026.8			DrawingNo	XF7162-1.5&2.8-21Blu
Approval	ZC	2026.8	Scale	1:1	Material	PBT+GF30
					Color	Blue
					Weight Kg	
						Sheet 1 of 1