
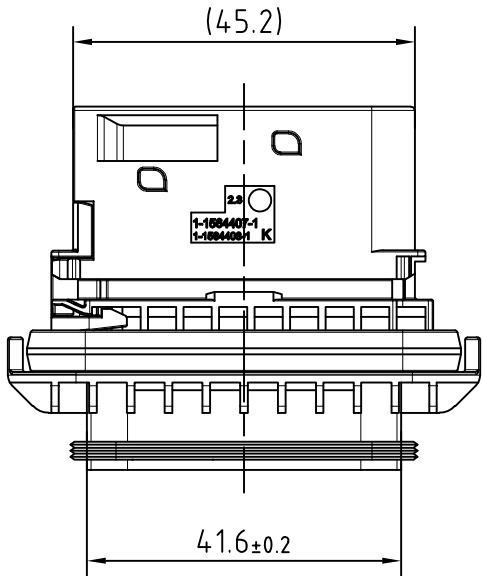
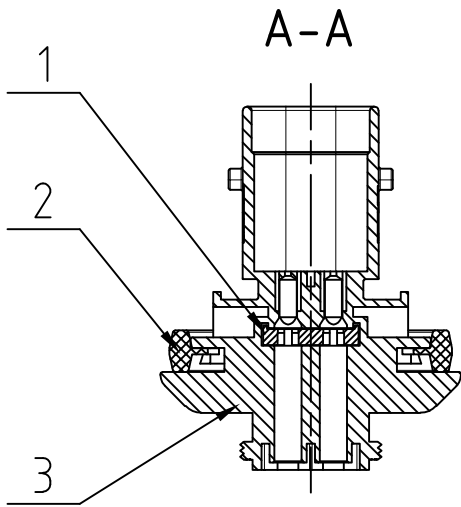
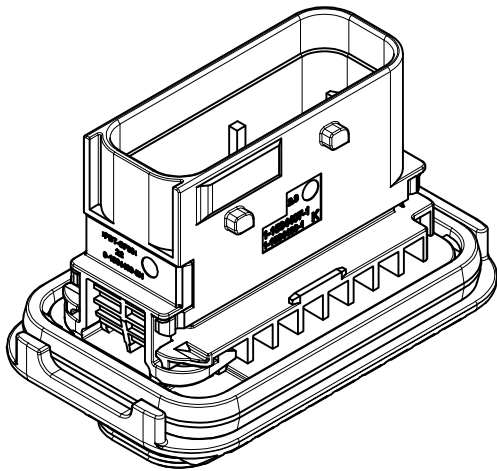


REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD

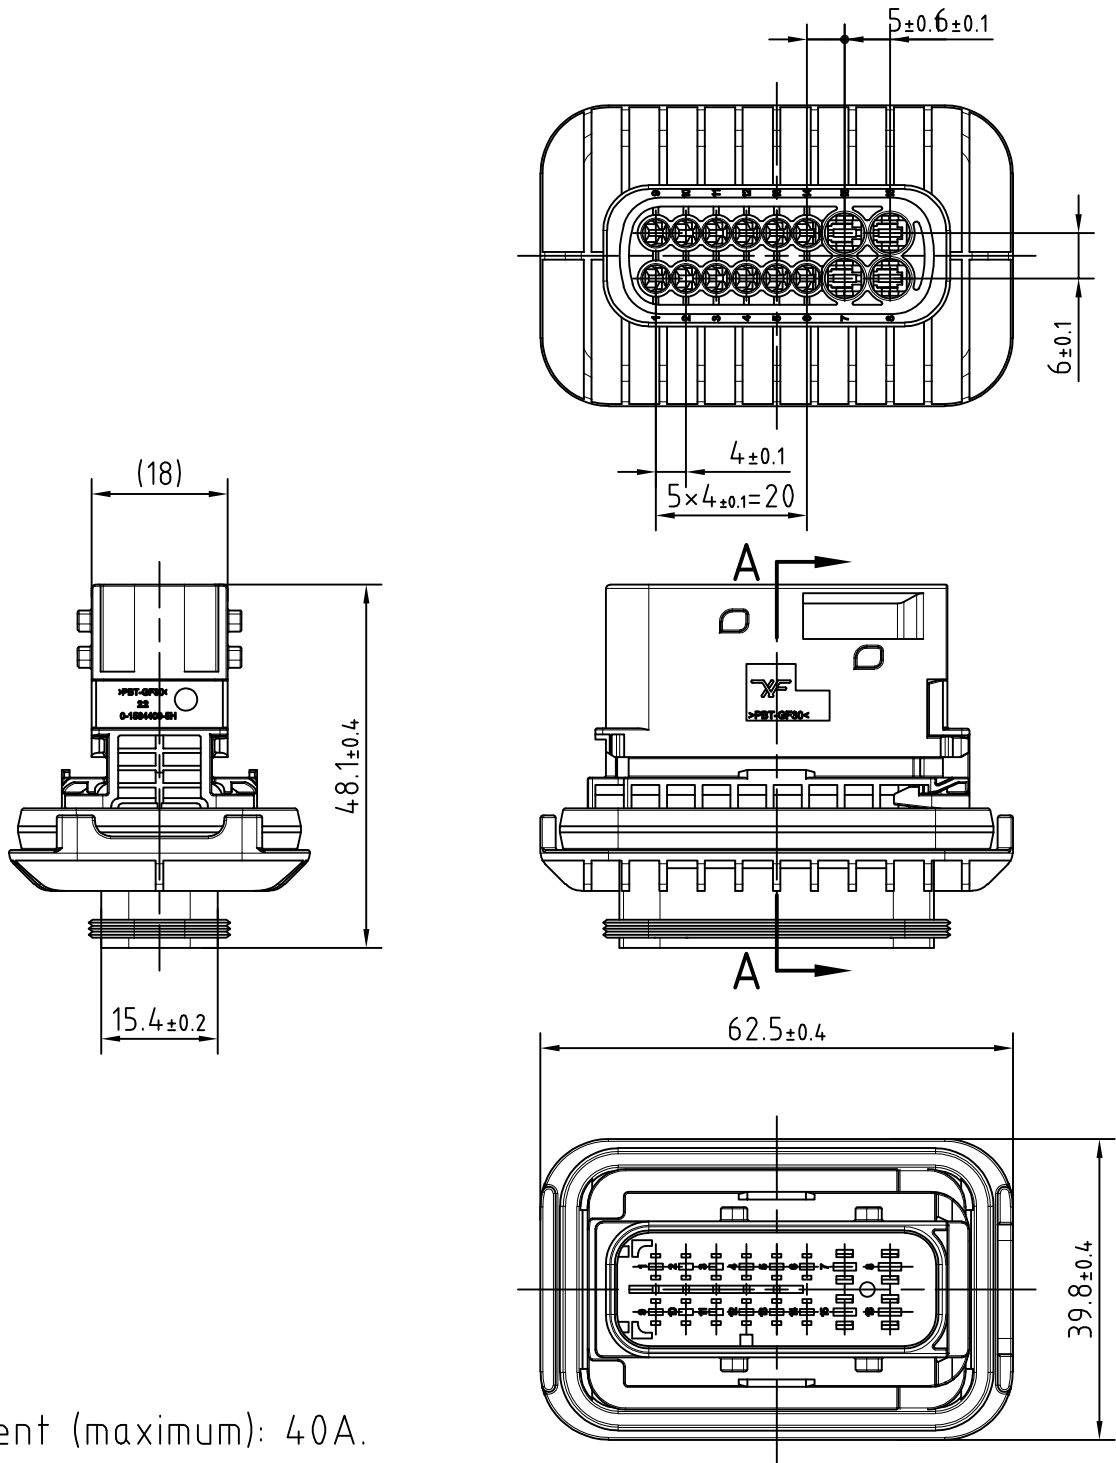


NOTES:

- Rated current (maximum): 40A.
- Working temperature range: -40°C TO $+120^{\circ}\text{C}$.
- Moisture resistance: IP67.
- UL Flame resistance rating: UL-94 V0
- Electrical characteristics:
Working voltage (VDC): 60
Rated voltage configuration (V): 12 | 24 | 48

3	Housing	1	PBT+GF30	Black
2	Seal	1	Silicone	Green
1	Secondary locking	1	PBT+GF30	Yellow
NO.	Name	Qty	Material	Color

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

					Name	Connector
					DrawingNo	XF7162-1.5&2.8-11BkS
Design					Material	PBT+GF30
Proofread					Color	Black
Approval					Weight Kg	
						Sheet 1 of 1