

A

B

C






D

E

F

REVISIONS

LTR	DESCRIPTION	DATE	DWN	APVD

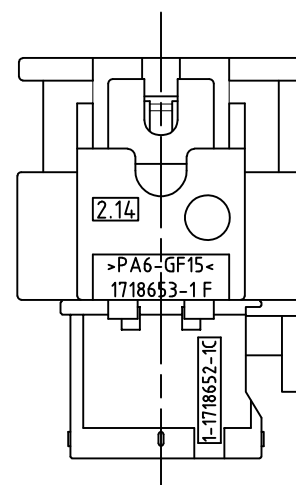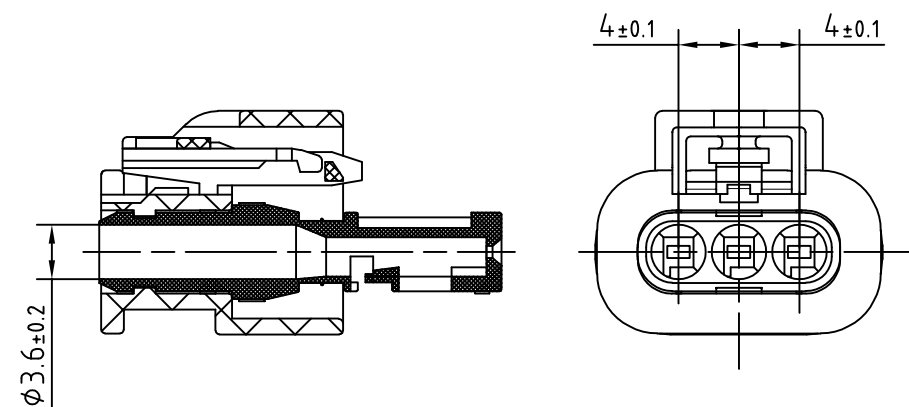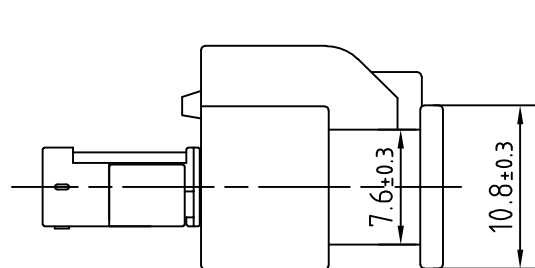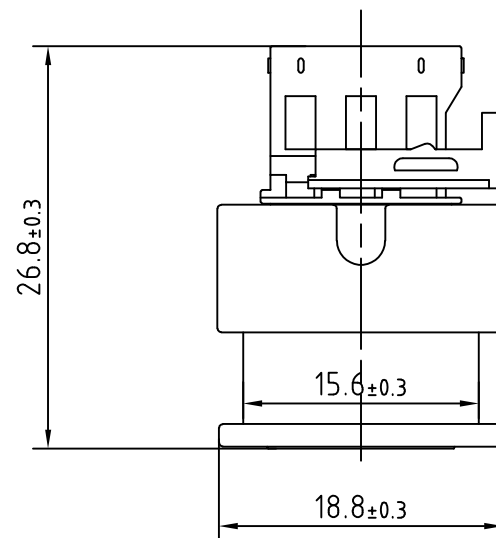

NOTES:

- Working temperature range: -40℃ TO +130℃.
- Moisture resistance:IPX9K.
- UL Flame resistance rating:UL-94 HB
- Electrical characteristics:

Rated voltage configuration (V):12 | 24 | 48

宁波翔沅电气有限公司
NINGBO XF ELECTRONIC CO., LTD

					Name	Connector
					DrawingNo	XF7035A-1.2-21Bk
					Material	PA66+GF13
Design	LCY	2026.8	Revision	01	Color	Black
Proofread	TXW	2026.8			Weight Kg	
Approval	ZC	2026.8	Scale	2:1		Sheet 1 of 1