



REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD

A

A-A





B

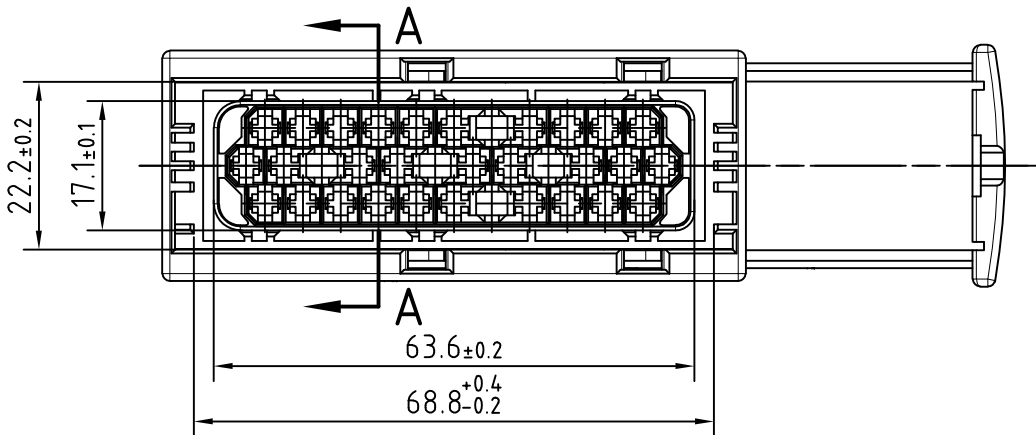


C

B-B

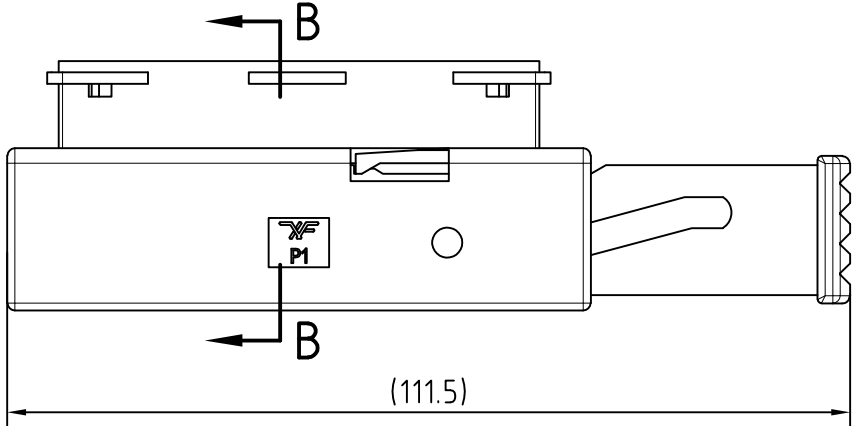

D

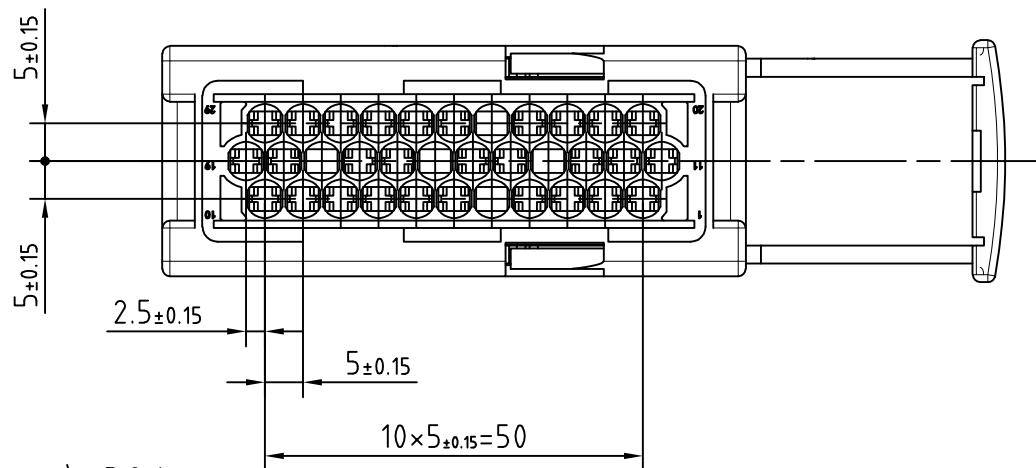


E

NOTES:

- Rated current (maximum): 30A.
- Working temperature range: -40℃ TO +125℃.
- UL Flame resistance rating:UL-94 HB
- Electrical characteristics:
Rated voltage configuration (V):12

F

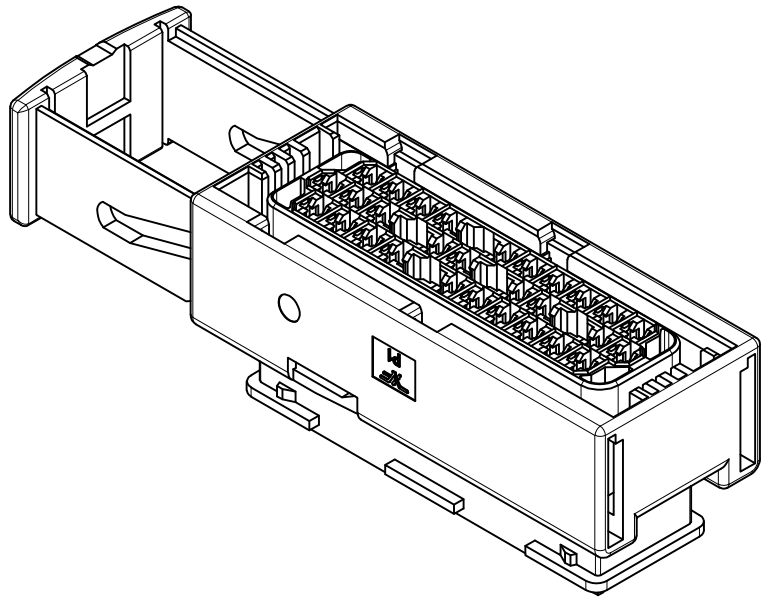

A



B

C

D

E

F

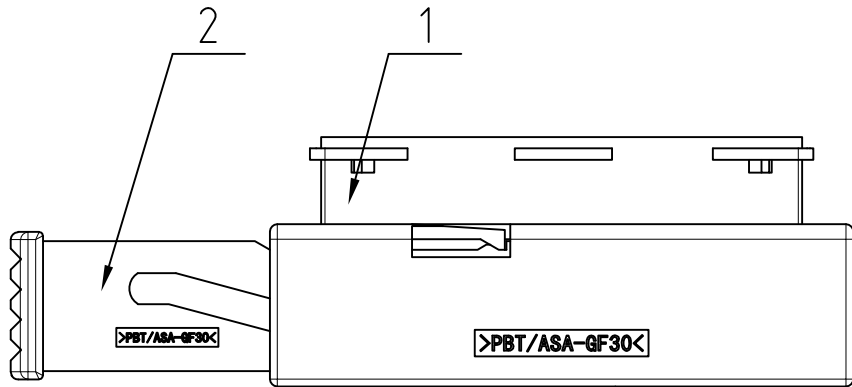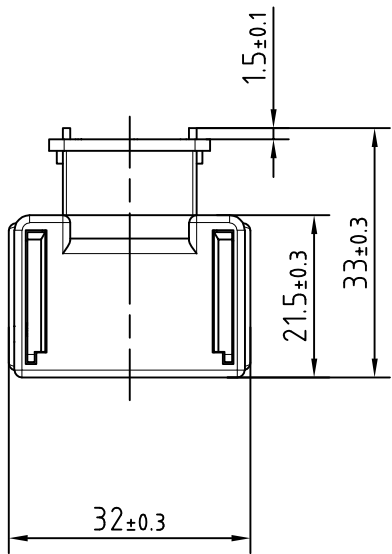

2	Slide	2	PBT+GF30	Red
1	Housing	1	PBT+GF30	Black
No.	Name	Qty	Material	Color

宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

Design	LCY	2026.9	Revision	01	Name	Connector
Proofread	TXW	2026.9			DrawingNo	XF7292-2.8-21Bk
Approval	ZC	2026.9	Scale	1:1	Material	PBT+GF30
					Color	Black
					Weight Kg	
					Sheet 1 of 1	

