
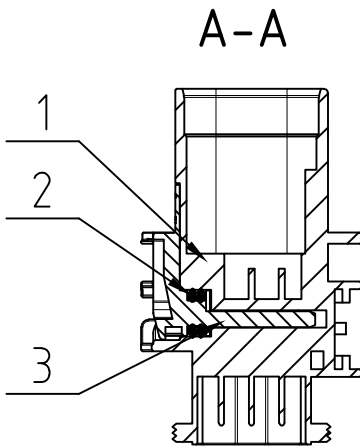
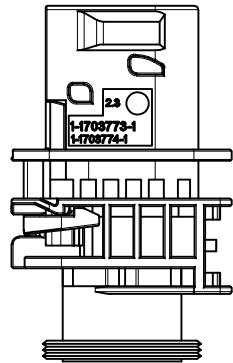
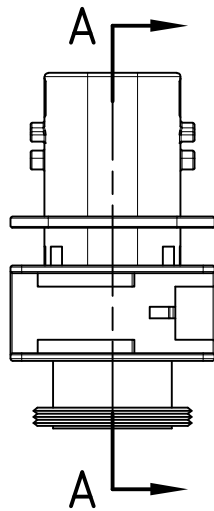
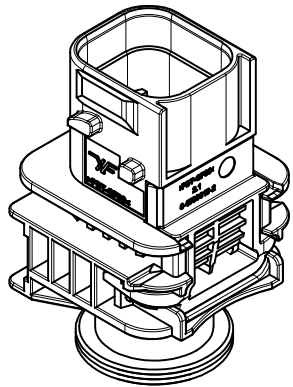

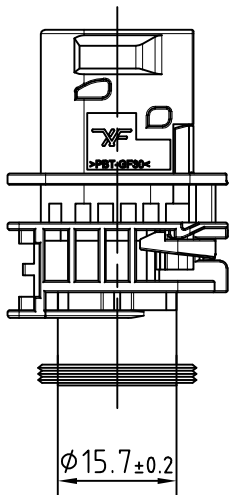
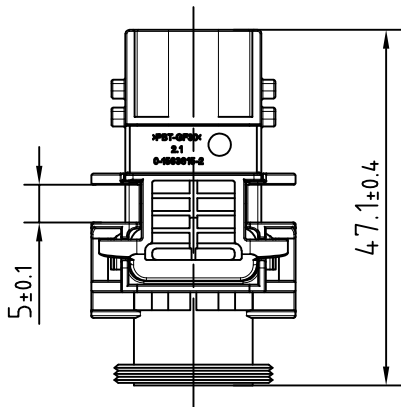
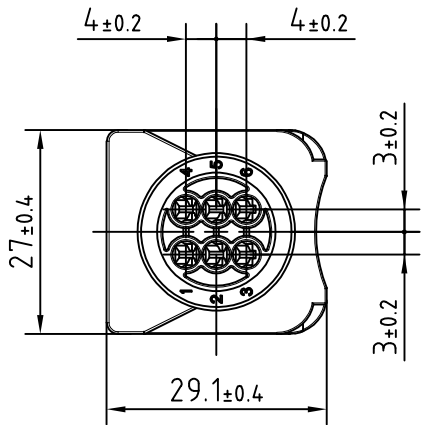


REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD



- NOTES:
- 1.Rated current (maximum): 10A.
 - 2.Working temperature range: -40℃ TO +125℃.
 - 3.Moisture resistance:IP67.
 - 4.UL Flame resistance rating:UL-94 HB
 - 5.Electrical characteristics:
Working voltage (VDC):60
Rated voltage configuration (V):12 | 24 | 48

3	Locking device	1	PBT+GF30	Yellow
2	Seal	1	Silicone	White
1	Housing	1	PBT+GF30	Black
No.	Name	Qty	Material	Color

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name	Connector
					DrawingNo	XF7063-1.5-11Bk
					Material	PBT+GF30
Design	LCY	2026.9	Revision	01	Color	Black
Proofread	TXW	2026.9			Weight Kg	
Approval	ZC	2026.9	Scale	1:1		Sheet 1 of 1