


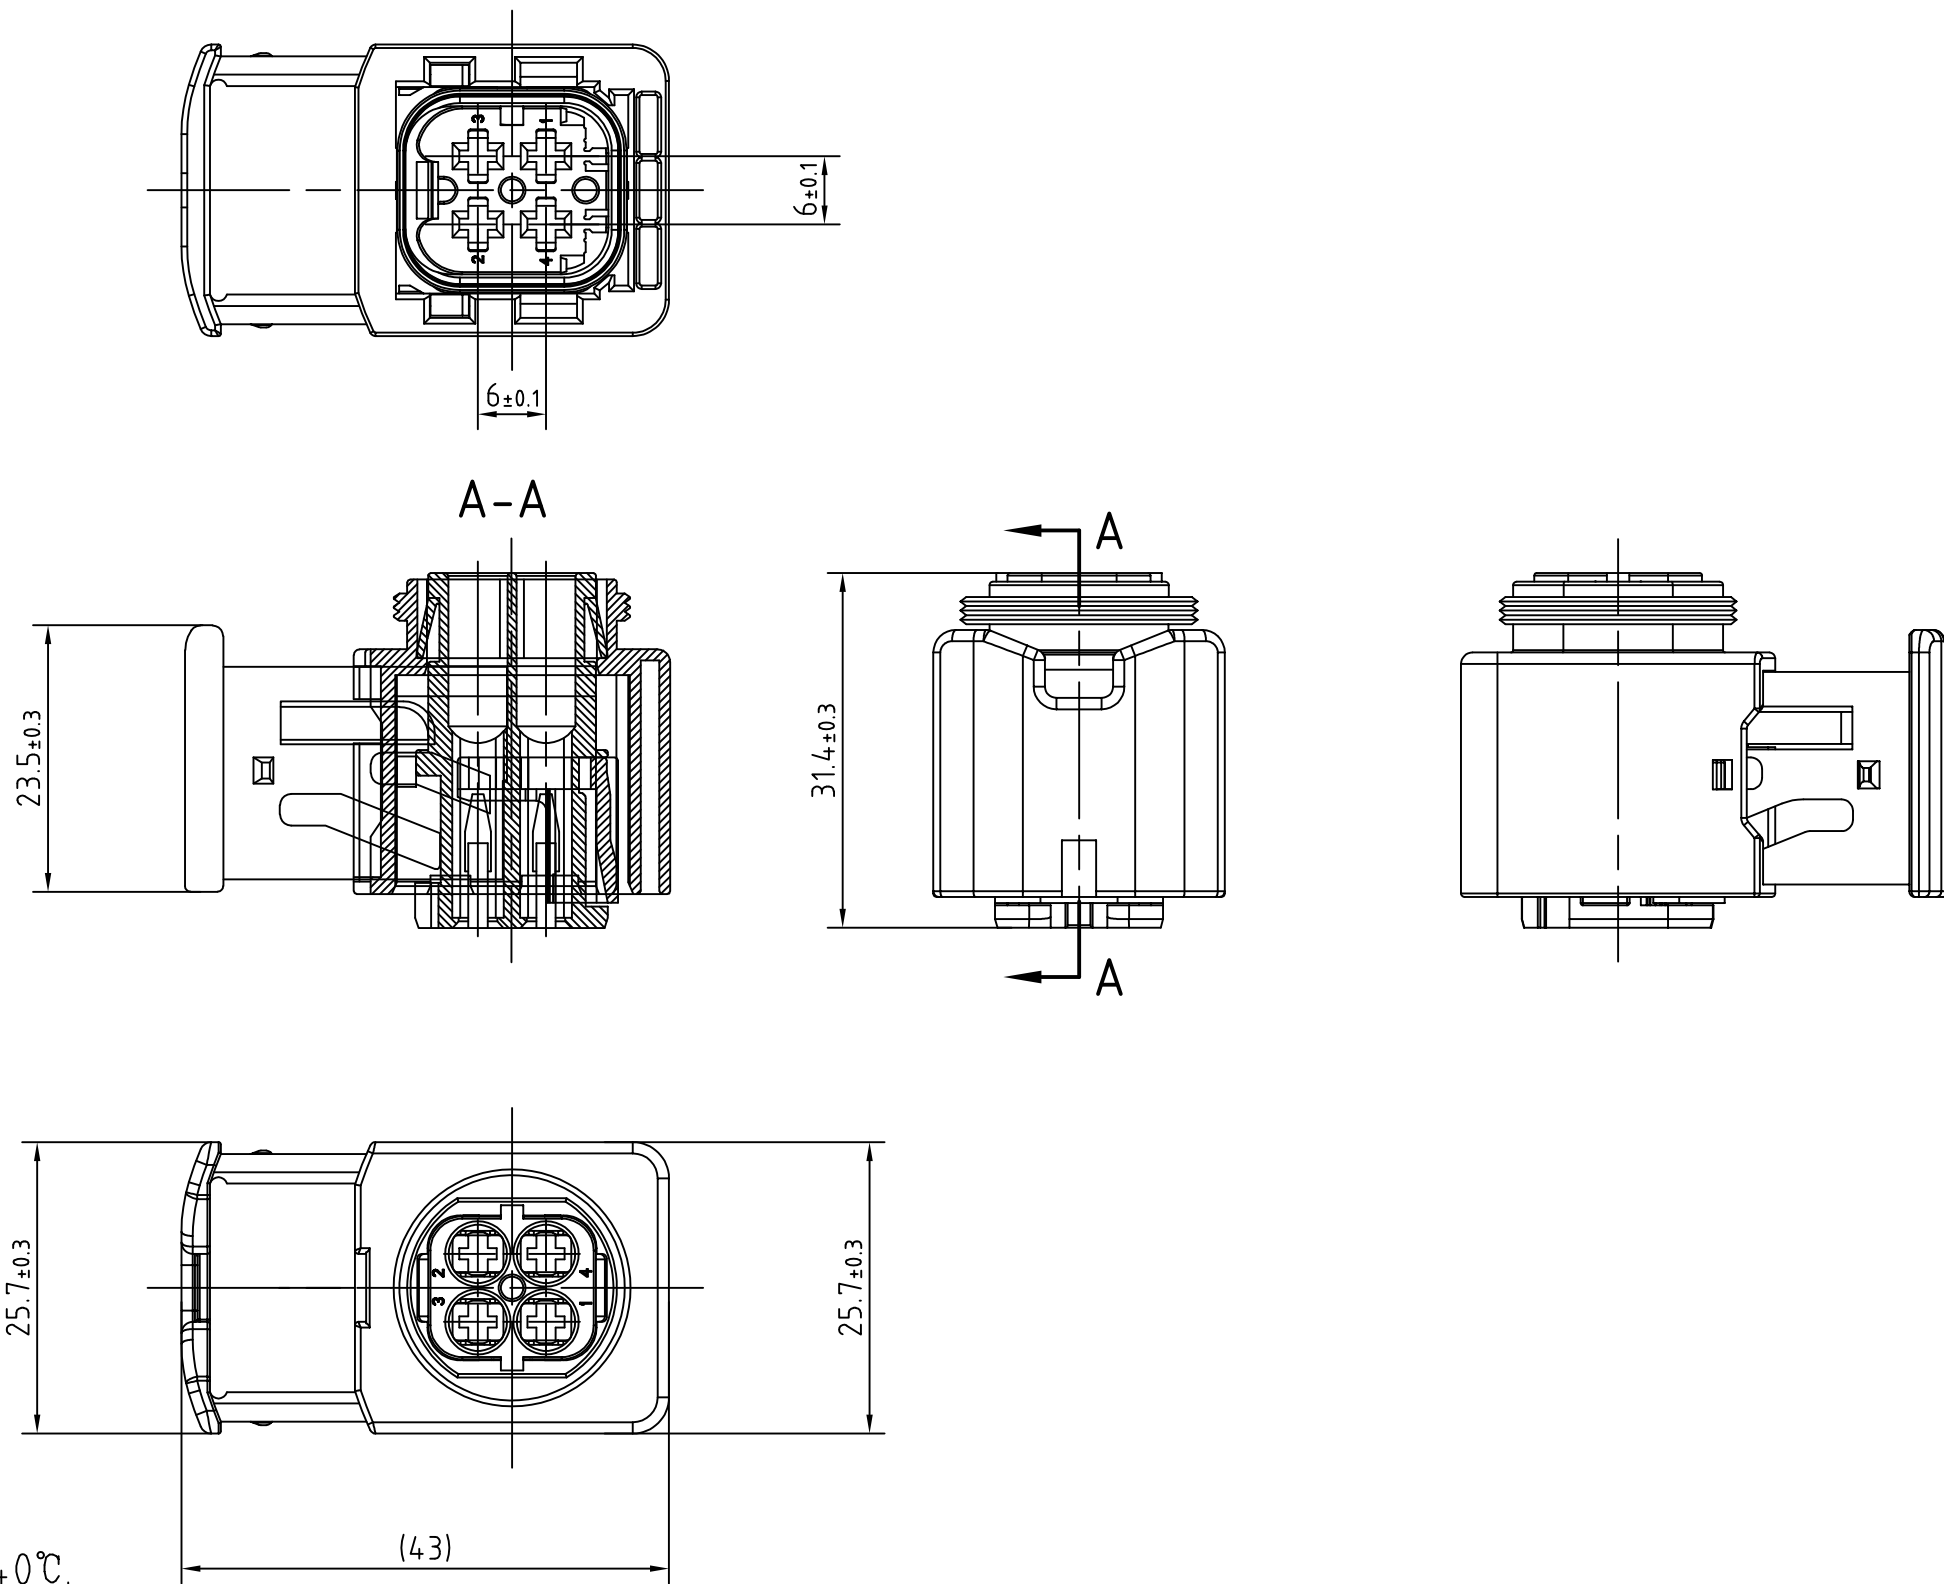

NOTES:

- 1.Rated current (maximum): 40A.
- 2.Working temperature range: -40°C TO $+140^{\circ}\text{C}$.
- 3.Moisture resistance:IP7.
- 4.UL Flame resistance rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):60
Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name	Connector
					DrawingNo	XF7043-2.8-21Bk
					Material	PBT+GF30
Design	LCY	2026.9	Revision	01	Color	Black
Proofread	TXW	2026.9			Weight Kg	
Approval	ZC	2026.9	Scale	1.5:1		Sheet 1 of 1