


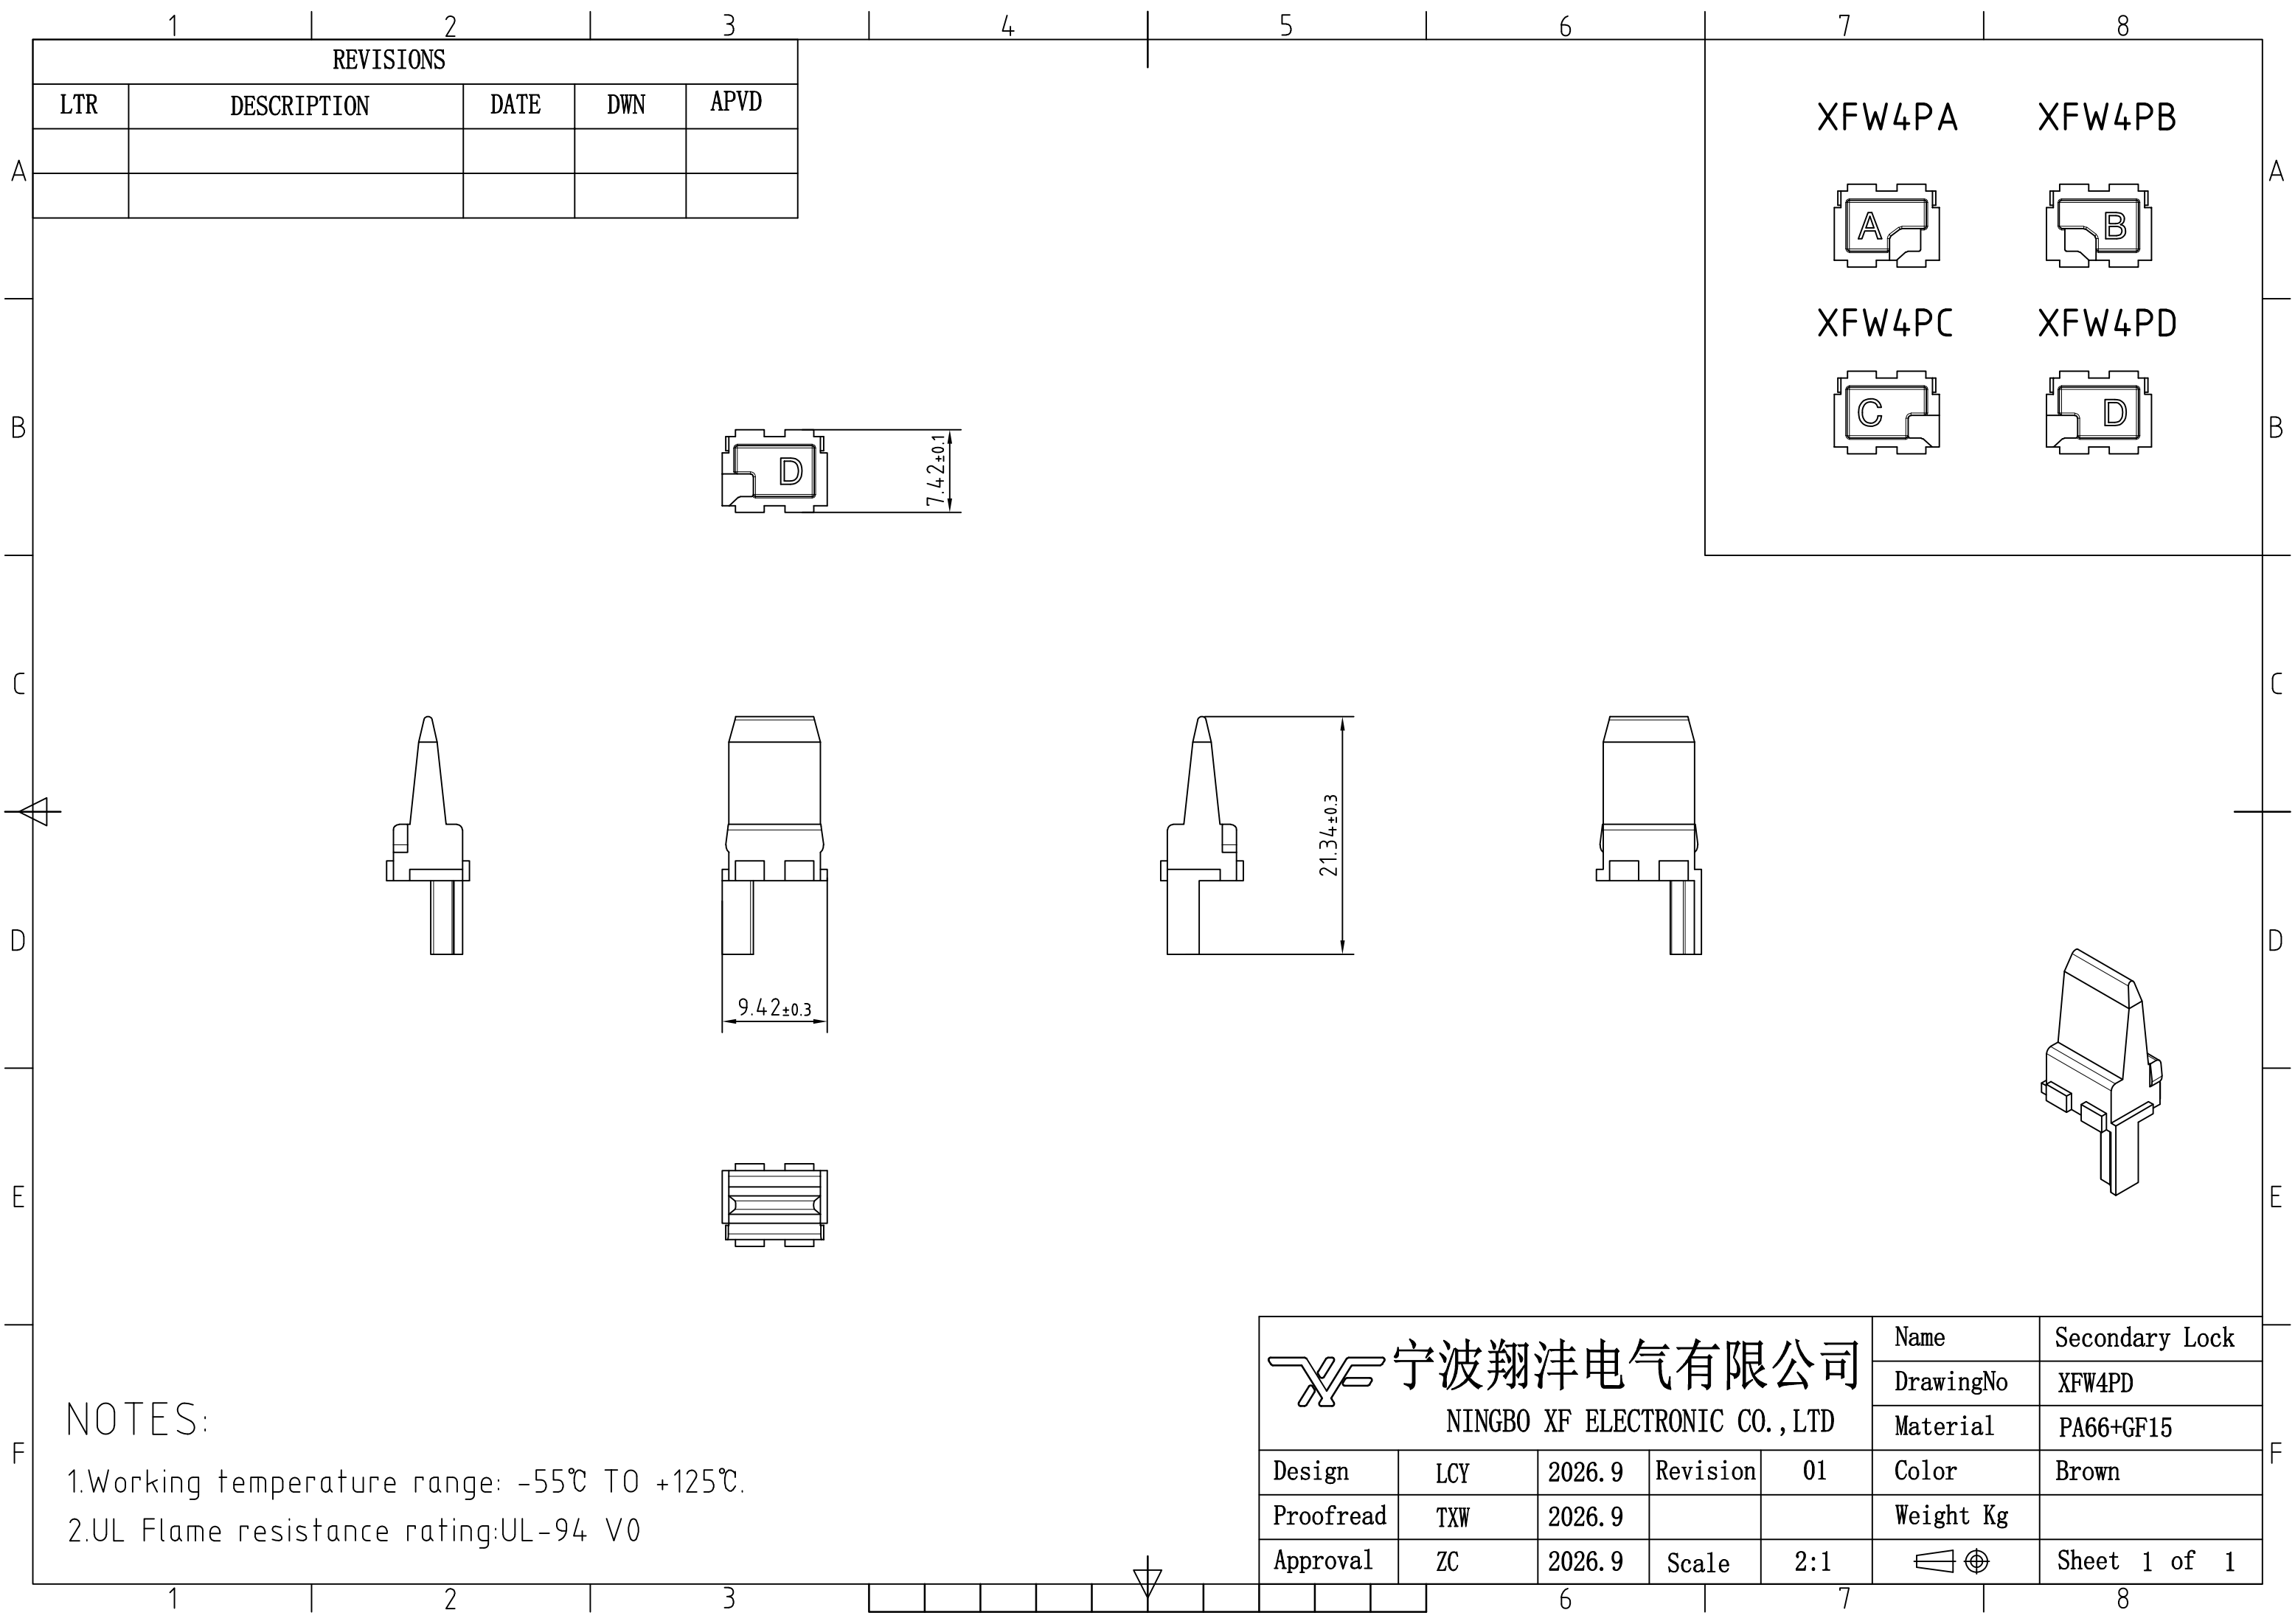

A

B

C

D

E

F

A

B

C

D

E



F

REVISIONS

LTR	DESCRIPTION	DATE	DWN	APVD










XFW4PA

XFW4PB



XFW4PC

XFW4PD

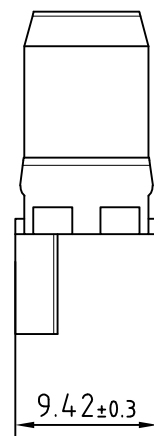

NOTES:

- 1.Working temperature range: -55℃ TO +125℃.
- 2.UL Flame resistance rating:UL-94 V0

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

Design	LCY	2026.9	Revision	01
Proofread	TXW	2026.9		
Approval	ZC	2026.9	Scale	2:1

Name	Secondary Lock
DrawingNo	XFW4PD
Material	PA66+GF15
Color	Brown
Weight Kg	
	Sheet 1 of 1