
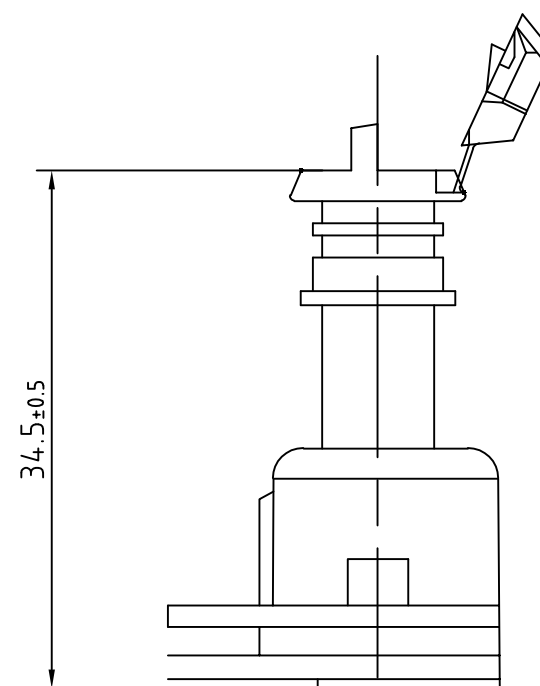
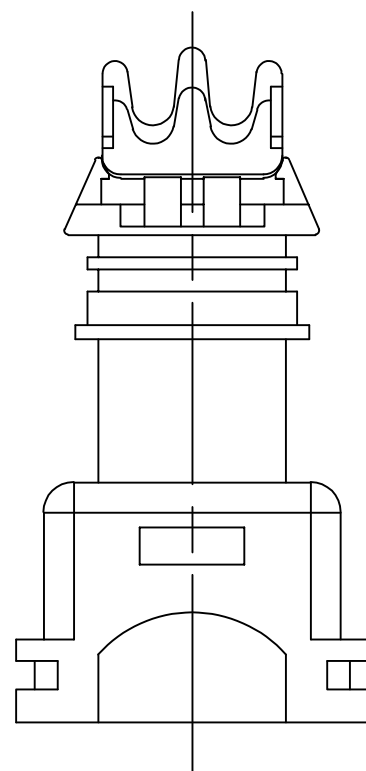
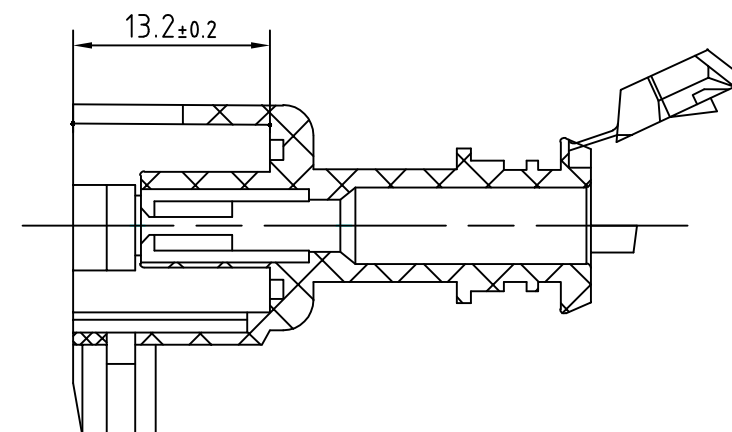
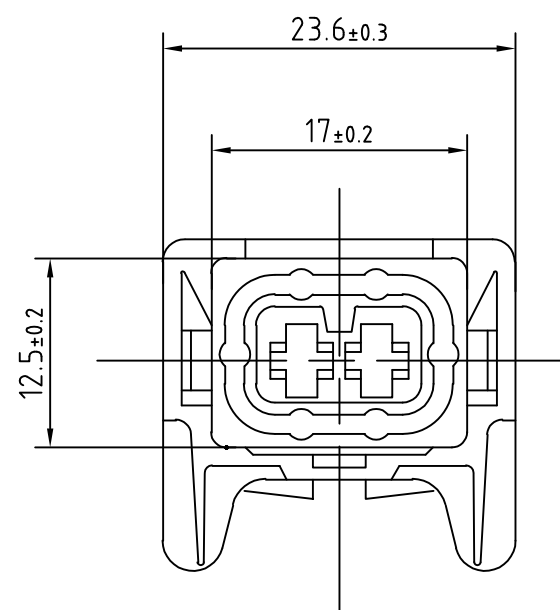




NOTES:

- 1.Rated current (maximum): 20A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.UL Flame resistance rating:UL-94 HB
- 5.Electrical characteristics:
Working voltage (VDC):24
Rated voltage configuration (V): 24

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name	Connector
					DrawingNo	XF7024-3.5-21Bk
					Material	PA66
Design	YJG	2026.9	Revision	01	Color	Black
Proofread	TXW	2026.9			Weight Kg	
Approval	ZC	2026.9	Scale	2:1		Sheet 1 of 1