

| REVISIONS |             |      |     |      |
|-----------|-------------|------|-----|------|
| LTR       | DESCRIPTION | DATE | DWN | APVD |
|           |             |      |     |      |

A








B

C

D

E

F

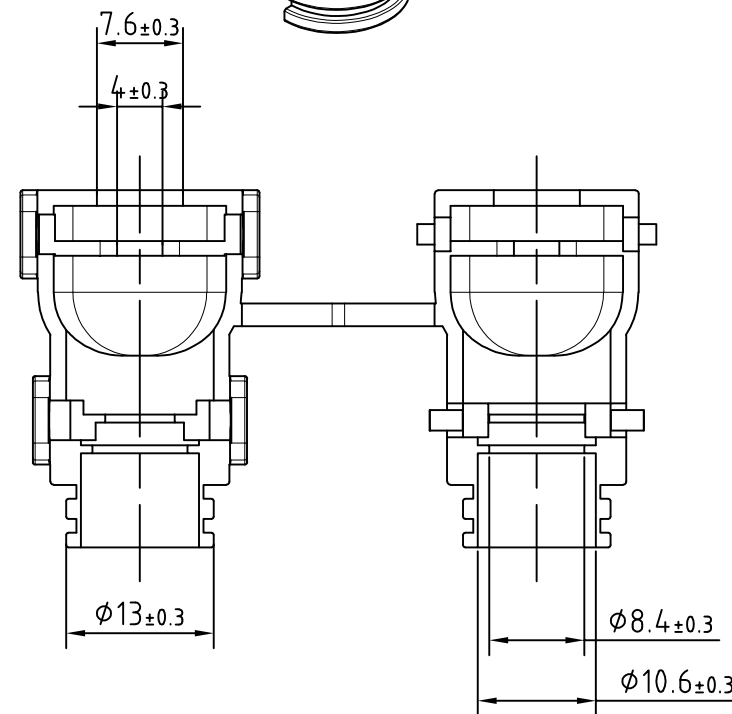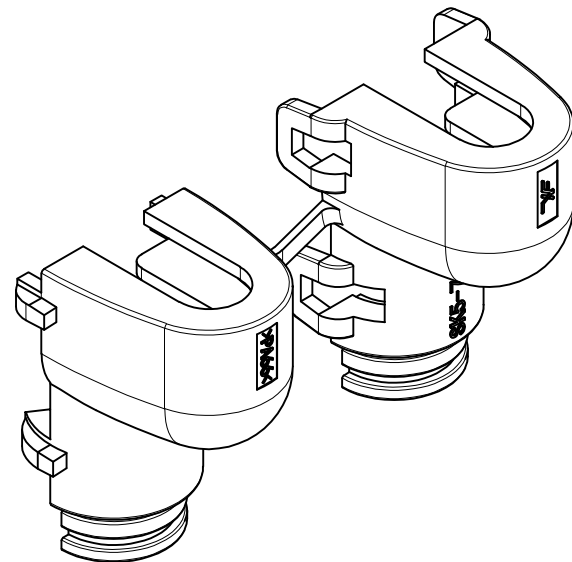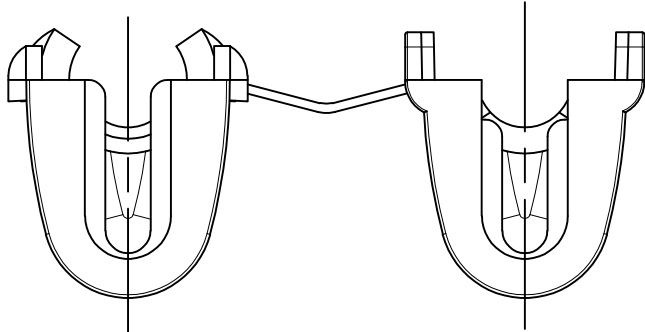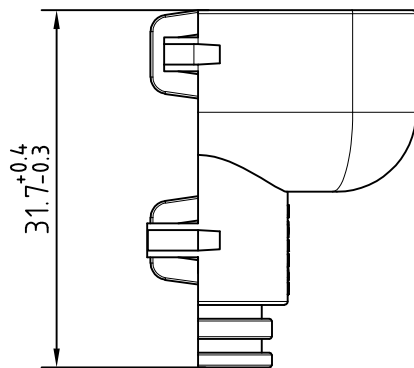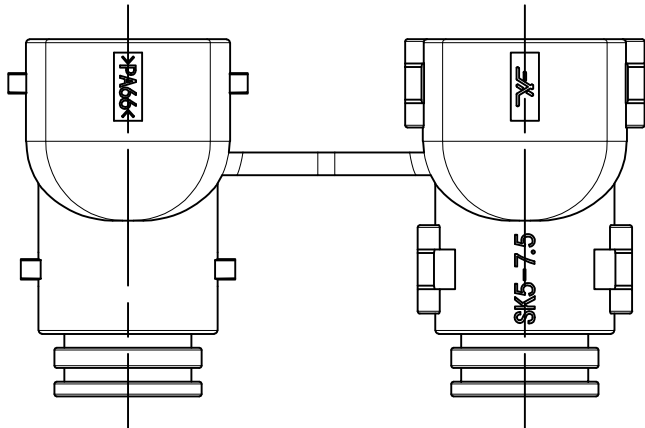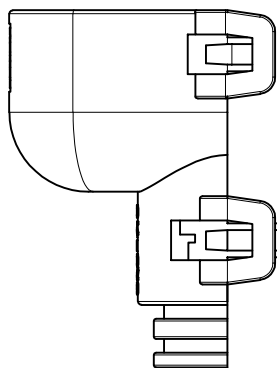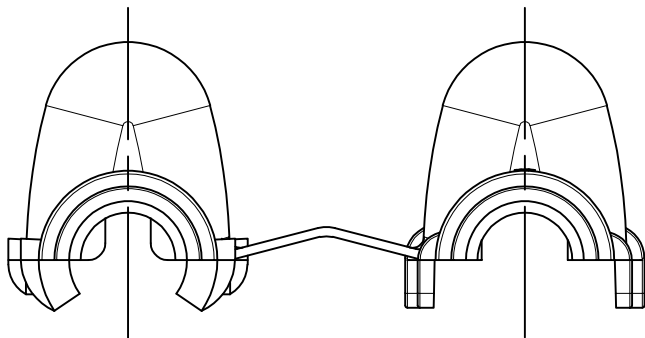

NOTES:

- 1.Working temperature range: -40℃ TO +125℃.
- 2.UL Flame resistance rating:UL-94 HB

宁波翔沣电气有限公司  
NINGBO XF ELECTRONIC CO.,LTD

|           |     |        |          |       |
|-----------|-----|--------|----------|-------|
| Design    | LCY | 2026.9 | Revision | 01    |
| Proofread | TXW | 2026.9 |          |       |
| Approval  | ZC  | 2026.9 | Scale    | 1.5:1 |

|           |              |
|-----------|--------------|
| Name      | Backshell    |
| DrawingNo | sk5-7.5      |
| Material  | PA66         |
| Color     | Black        |
| Weight Kg |              |
|           | Sheet 1 of 1 |