

| 修 订 记 录 |     |     |     |     |
|---------|-----|-----|-----|-----|
| 记 号     | 描 述 | 日 期 | 设 计 | 审 核 |
|         |     |     |     |     |

A








B

C

D

E

F

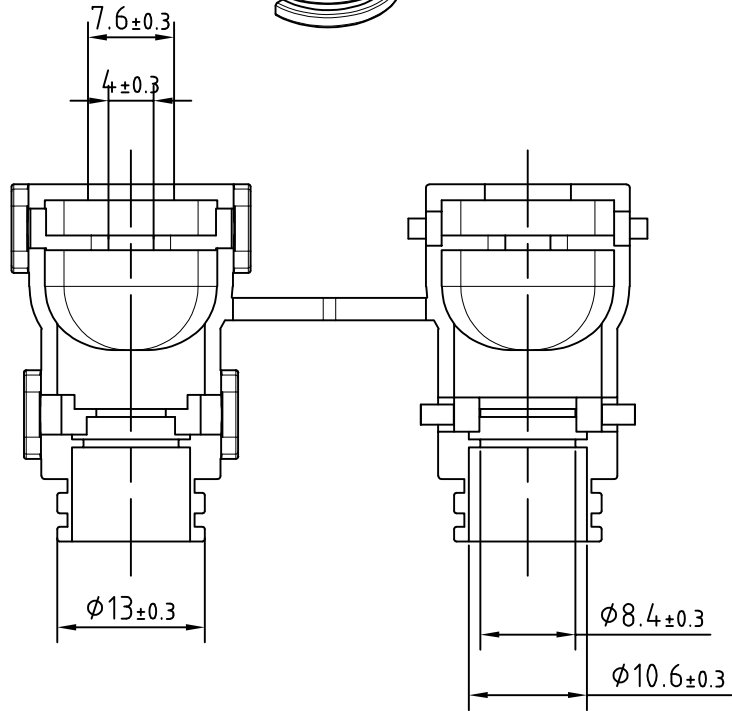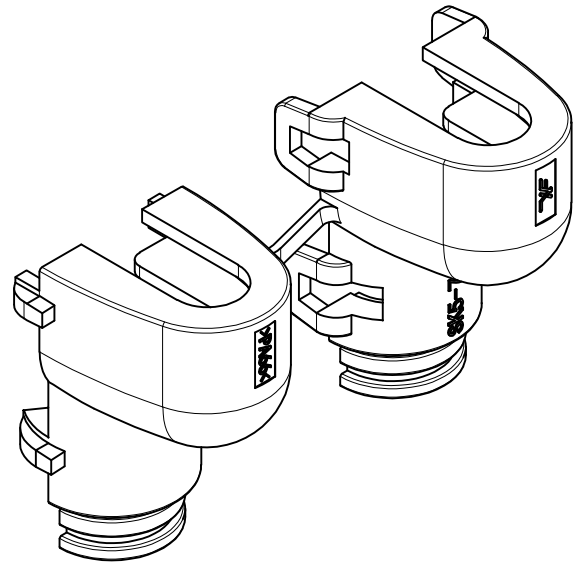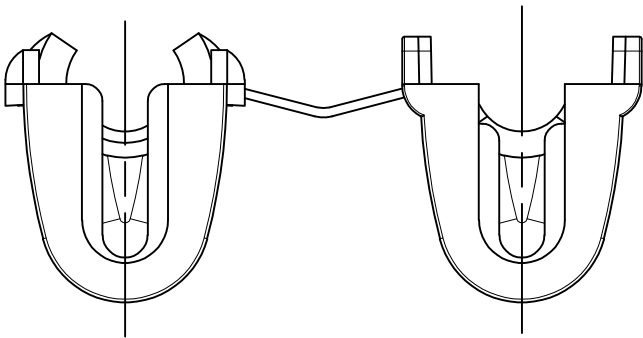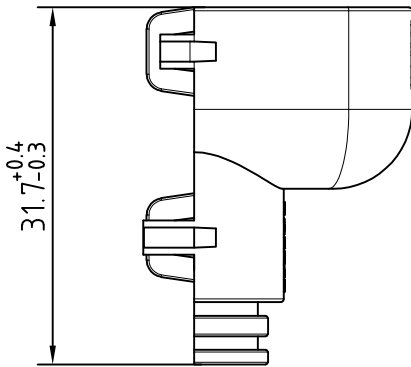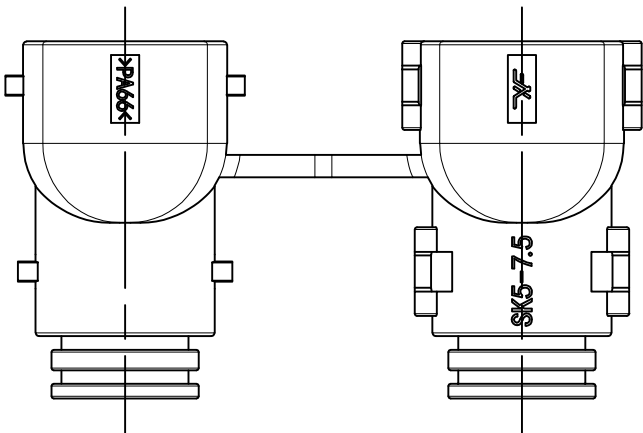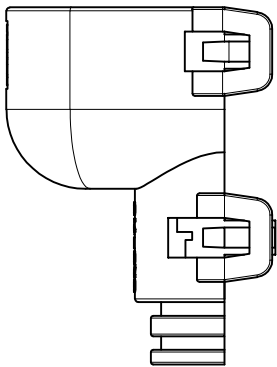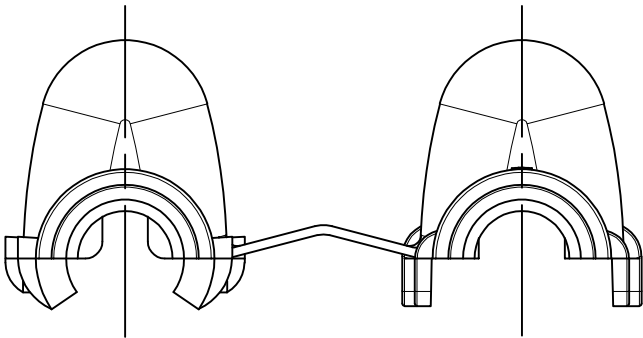

注:

- 1、工作温度: -40℃~125℃
- 2、UL阻燃性等级:UL-94 HB



宁波翔沅电气有限公司

NINGBO XF ELECTRONIC CO., LTD

|                    |     |         |     |        |
|--------------------|-----|---------|-----|--------|
| 设 计                | 赖春裕 | 2026. 9 | 标准化 |        |
| 校 对                | 童旭文 | 2026. 9 |     |        |
| 审 核                | 张 超 | 2026. 9 | 比 例 | 1. 5:1 |
| 未注公差: XX. X ±0. 2; |     |         |     |        |

|         |          |             |  |
|---------|----------|-------------|--|
| 名 称     | 尾罩       |             |  |
| 型 号     | sk5-7. 5 |             |  |
| 材 料     | PA66     |             |  |
| 颜 色     | 黑色       |             |  |
| 重 量     |          |             |  |
| 阶 段 标 记 | 版 次      | 01          |  |
| A       |          | 共 1 页 第 1 页 |  |

A

B

C

D

E

F