


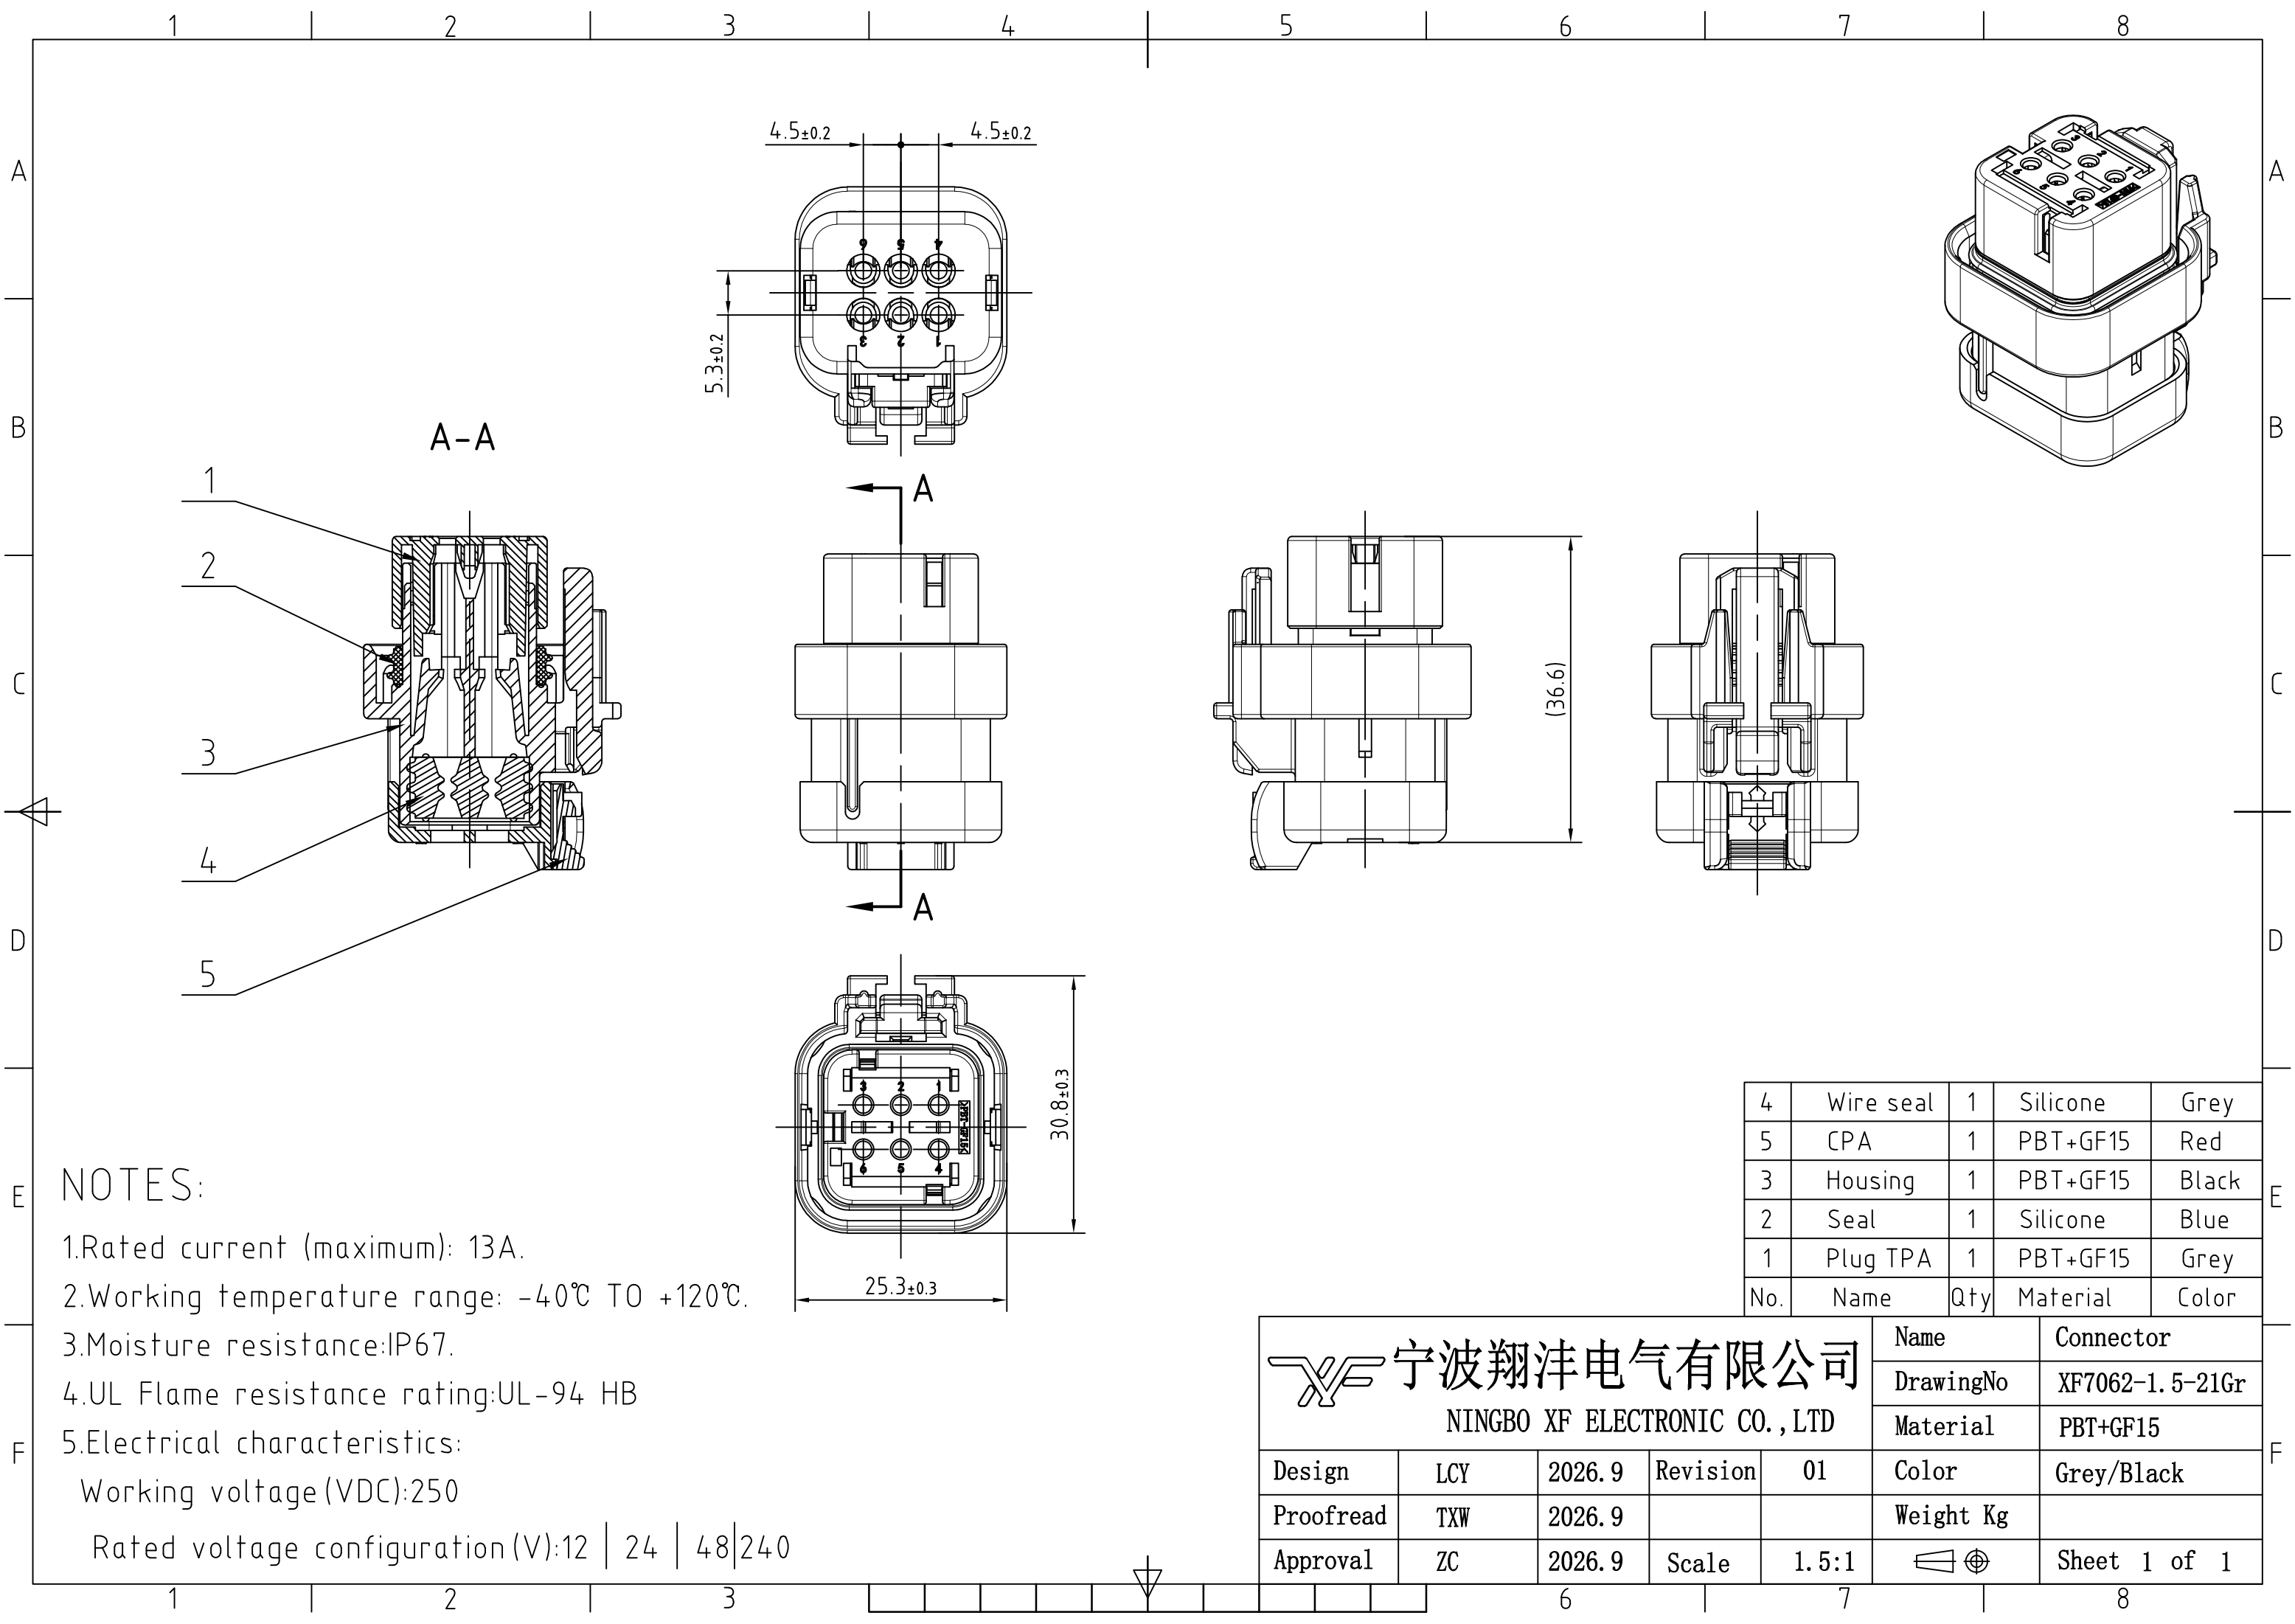

NOTES:

1.Rated current (maximum): 13A.

2.Working temperature range: -40℃ TO +120℃.

3.Moisture resistance:IP67.

4.UL Flame resistance rating:UL-94 HB

5.Electrical characteristics:

Working voltage (VDC):250

Rated voltage configuration (V):12 | 24 | 48|240

4	Wire seal	1	Silicone	Grey
5	CPA	1	PBT+GF15	Red
3	Housing	1	PBT+GF15	Black
2	Seal	1	Silicone	Blue
1	Plug TPA	1	PBT+GF15	Grey
No.	Name	Qty	Material	Color

XF 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector
					DrawingNo	XF7062-1.5-21Gr
					Material	PBT+GF15
Design	LCY	2026.9	Revision	01	Color	Grey/Black
Proofread	TXW	2026.9			Weight Kg	
Approval	ZC	2026.9	Scale	1.5:1		Sheet 1 of 1