
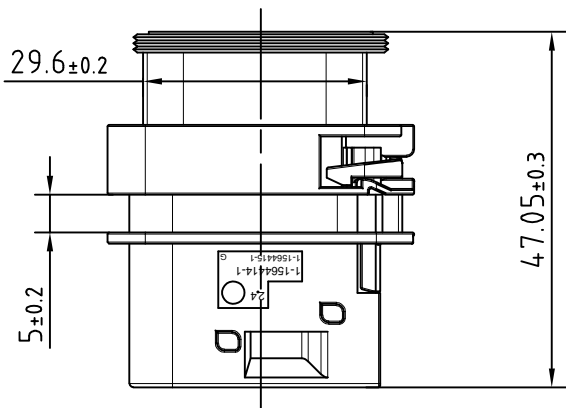
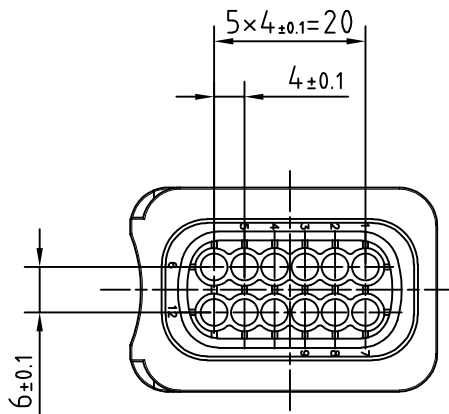
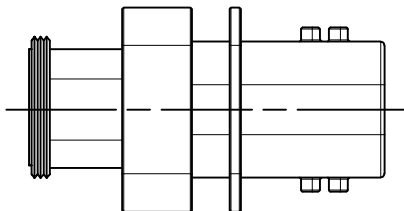
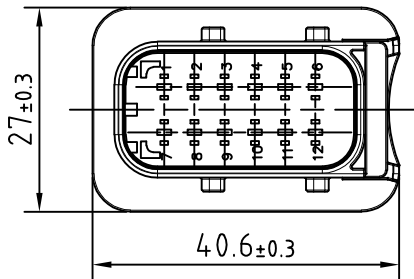
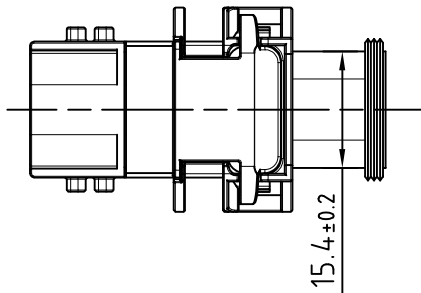


REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD

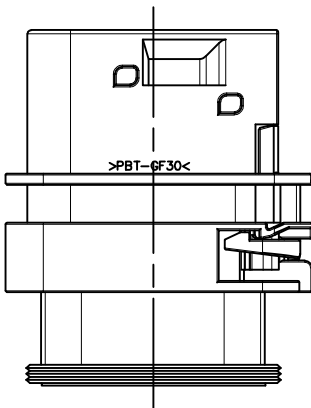

NOTES:

1.Rated current (maximum): 10A.

2.Working temperature range: -40℃ TO +120℃.


3.Moisture resistance:IP67.

4.UL Flame resistance rating:UL-94 HB

5.Electrical characteristics:

Working voltage(VDC):60

Rated voltage configuration(V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector
					DrawingNo	XF7122-1.5-11Bk
					Material	PBT+GF30
Design	LCY	2026.10	Revision	01	Color	Black
Proofread	TXW	2026.10			Weight Kg	
Approval	ZC	2026.10	Scale	1:1		Sheet 1 of 1