


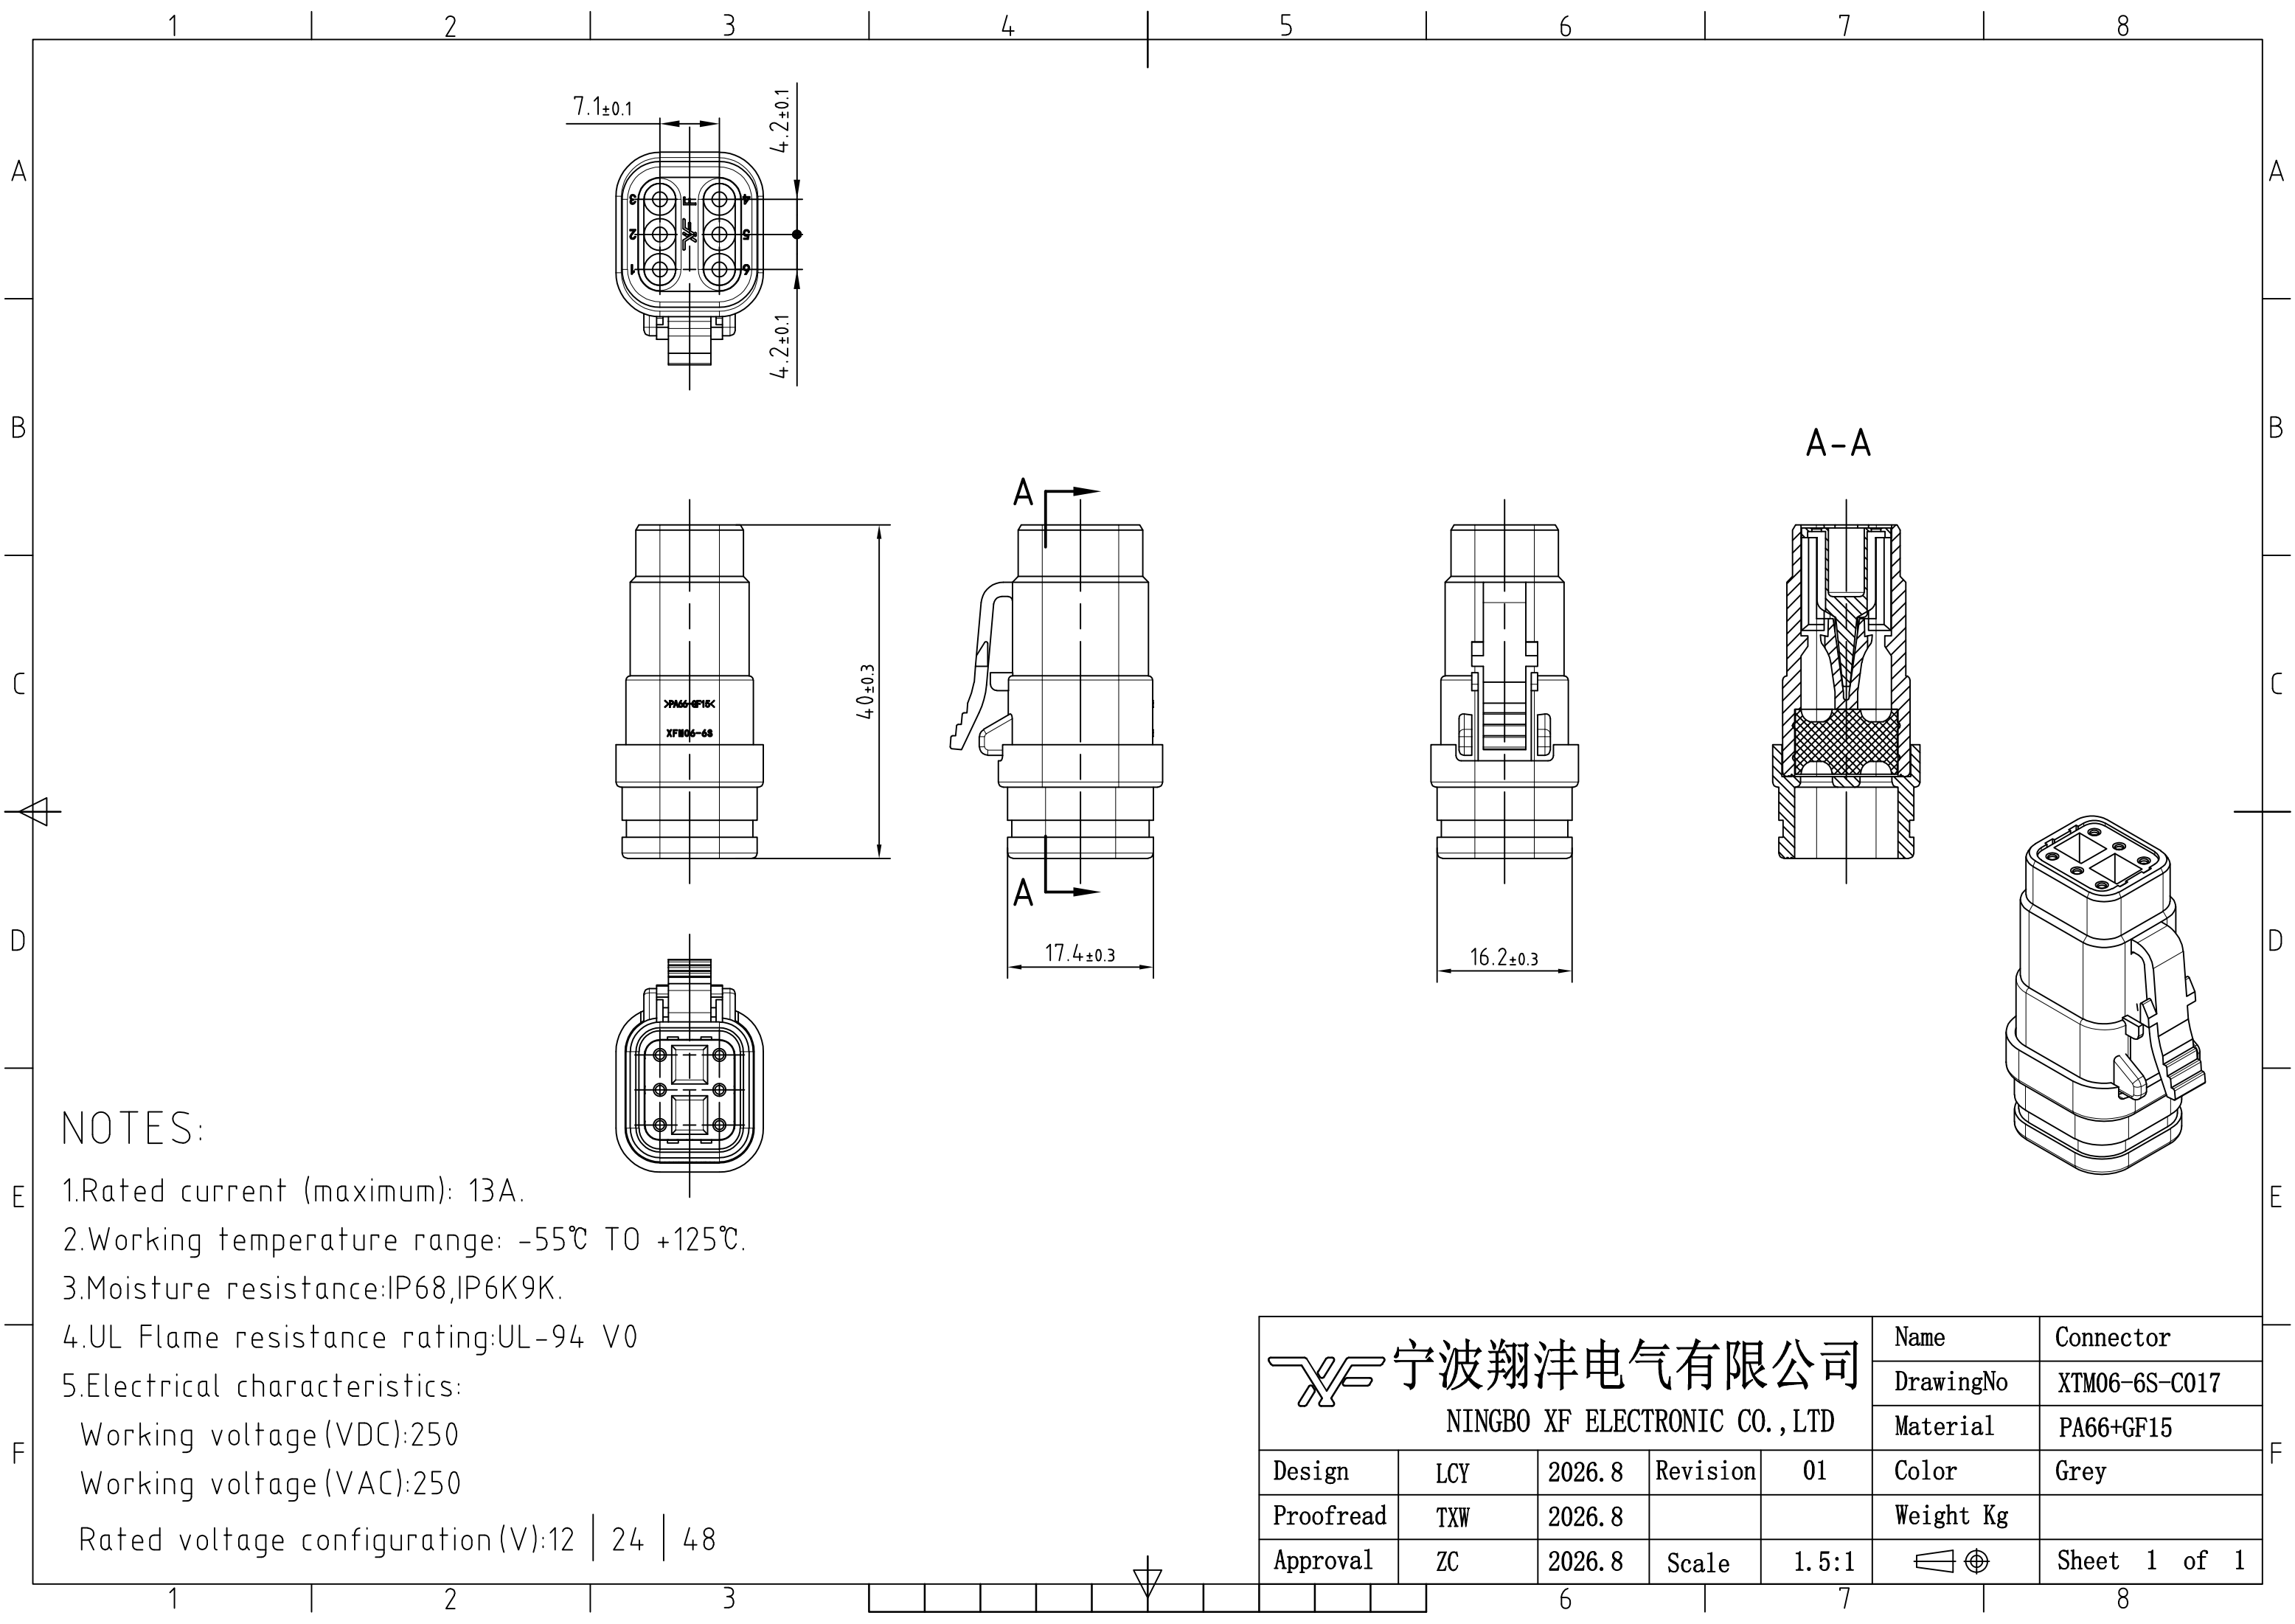

NOTES:

1.Rated current (maximum): 13A.

2.Working temperature range: -55℃ TO +125℃.

3.Moisture resistance:IP68,IP6K9K.

4.UL Flame resistance rating:UL-94 V0

5.Electrical characteristics:

Working voltage (VDC):250

Working voltage (VAC):250

Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name	Connector
					DrawingNo	XTM06-6S-C017
					Material	PA66+GF15
Design	LCY	2026.8	Revision	01	Color	Grey
Proofread	TXW	2026.8			Weight Kg	
Approval	ZC	2026.8	Scale	1.5:1		Sheet 1 of 1