
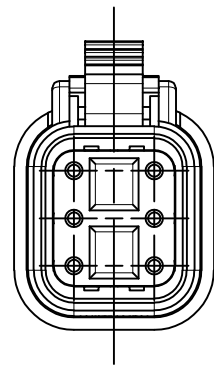
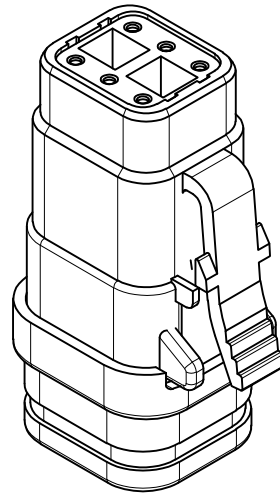
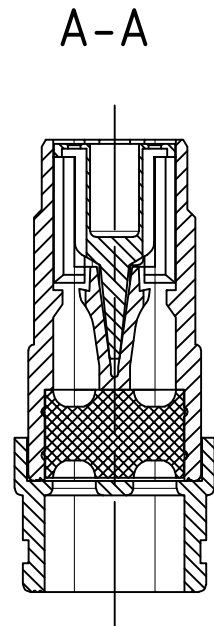
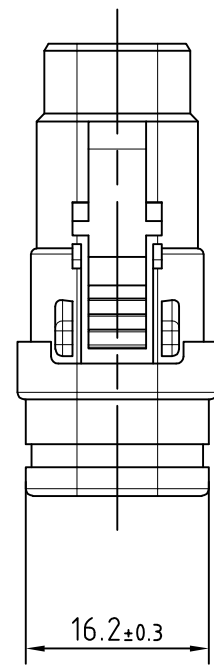
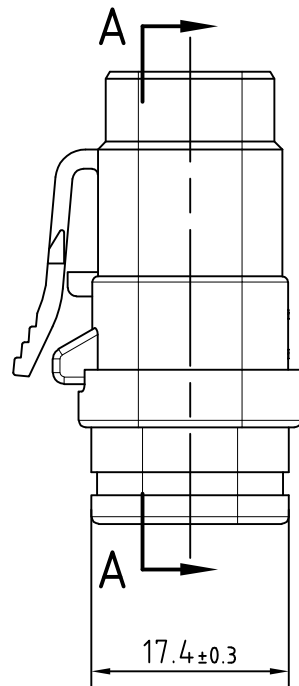
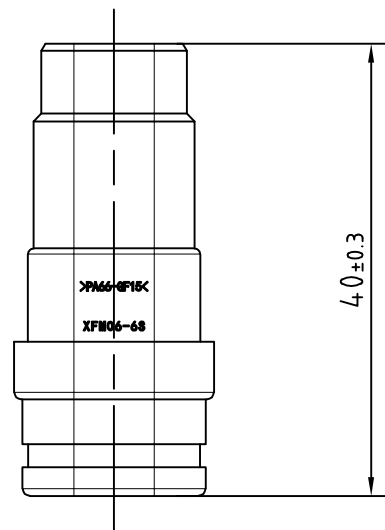
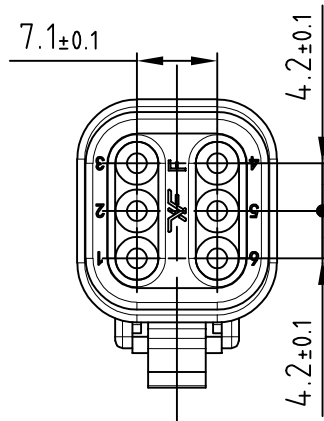


A
B
C
D
E
F



- 注:
- 1、端子额定电流 (最大值) (A):7.5A
 - 2、工作温度:-55℃~125℃
 - 3、防水:IP68、IP6K9K
 - 4、UL阻燃性等级:UL-94 V0
 - 5、电气特征:工作电压 (VDC):250
工作电压 (VAC):250
标称电压架构 (V):12|24|48

 宁波翔沔电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名 称	连接件			
					型 号	XTM06-6S-C017			
					材 料	PA66+GF15			
设 计	赖春裕	2026.8	标准化		颜 色	灰色			
校 对	童旭文	2026.8			重 量				
审 核	张 超	2026.8	比 例	1.5:1	阶段标记		版 次	01	
未注公差：XX.X ±0.2；					A			共 1 页	第 1 页

A
B
C
D
E
F